



# Applied Systems

Product catalogue 2022



High performance and reliability for comfort and process applications

The background of the slide is a photograph of a blue sky with scattered white clouds. In the lower right portion, the top of a building is visible, featuring a large, blue, stylized 'DAIKIN' logo on a light-colored facade. A semi-transparent blue rectangular area covers the left and center of the image, serving as a backdrop for the text.

Our promise...

... is to ensure that customers can depend on Daikin for the ultimate in comfort, so that they are free to focus on their own working and home lives.

We promise to dedicate ourselves to technological excellence, a design focus and the highest quality standards so that our customers can trust and rely on the comfort we deliver.

Our promise to the planet is absolute. Our products are at the forefront of low energy-usage and we will innovate to further reduce the environmental impact of HVAC-R (Heating, Ventilation, Air conditioning, Refrigeration) solutions. We lead where others follow.

We will continue our global leadership in HVAC-R solutions as our specialist expertise in all market sectors combined with 90 years' experience enable us to deliver added value in long-lasting relationships based on trust, respect and credibility.

We promise to continue our forward-thinking ethos, treating challenges as opportunities to produce ever-better solutions. We will drive innovation and go the extra distance for our customers and our company.


We will be smart and ready to do things differently.

We will deliver on these core values of our brand and enjoy sustainable success with continued growth.

# Table of content

<b>Daikin, your partner of choice</b>	<b>4</b>
Tools and platforms	5
The best partner for your green project	6
Seasonal efficiency	7
Chiller modernisation	8
Day-to-day reliability and efficiency	10
<b>Daikin chillers, the best choice</b>	<b>12</b>
Why choose Daikin chillers?	14
<b>Products overview</b>	<b>18</b>
<b>Chillers</b>	<b>22</b>
<b>Air cooled chillers</b>	<b>23</b>
Air cooled chillers (Cooling only)	23
Air cooled chillers (Heat pump)	68
Multipurpose unit	84
Condensing unit	88
<b>Water cooled chillers</b>	<b>90</b>
Condenserless chillers	113
Centrifugal chillers	120
Accessories	128
<b>Air handling units</b>	<b>130</b>
<b>Fan coil units</b>	<b>146</b>
<b>Control systems</b>	<b>172</b>

## Daikin world

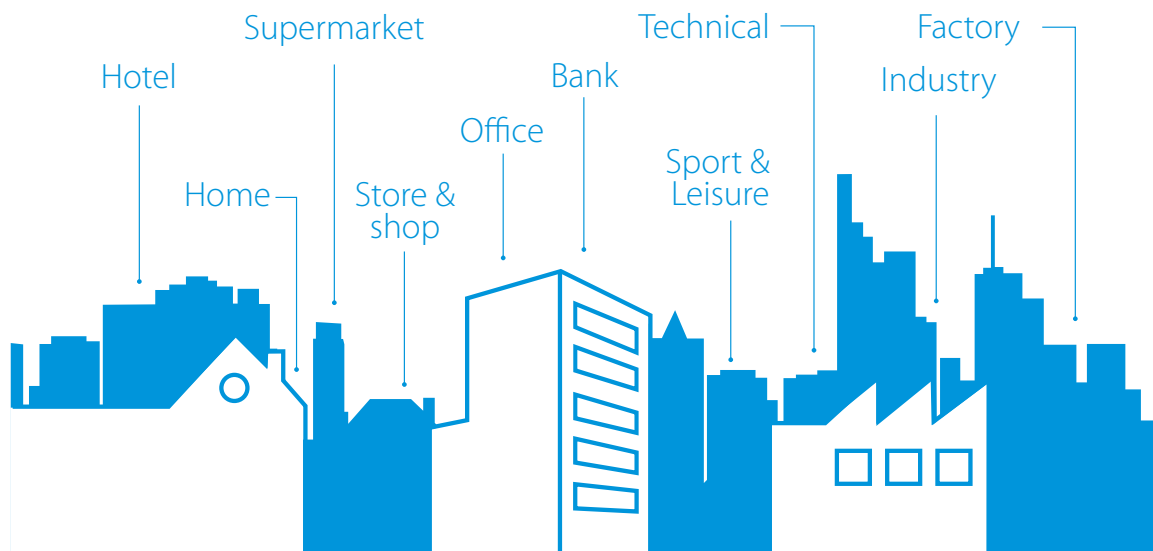



Forged under severe conditions around the world, Daikin chillers, fan coil units & air handling units provide high quality, operation efficiency and energy savings. Various applications are possible including air conditioning applications, industry-type process cooling and heating, and large-scale district cooling and heating.

## A partner of choice

Daikin is Europe's leading manufacturer and global n°1 of highly energy-efficient heating, cooling, ventilation and refrigeration solutions for residential, commercial and industrial applications. Daikin is a leader in using technologies that help preserve the environment, such as those that conserve energy and deliver high reliability to its customers. Daikin's flexible applied systems deliver high efficiency for commercial, institutional and industrial buildings.

## The comfort of reliability

Nobody is really looking for complexity in business. Because complexity often leads to mistakes, delays or losses. Unfortunately, the world we are all doing business in, is sometimes quite complex. When looking for further business development, we all expand our national and international operations. And that doesn't make things easy.

As a small scale business or multinational company, you deserve the best partners. Partners that can take away the headaches and make you feel comfortable again. With Daikin, you have found such a partner. Because Daikin would like things to be easy ... for you.

## Daikin quality

Daikin's much envied quality quite simply stems from the close attention paid to design, production and testing as well as aftersales support. To this end, every component is carefully selected and rigorously tested to verify its contribution to product quality and reliability.


## Staff who understands you

Daikin and its staff of devoted engineers, consultants and analysts are ready to assist you on a daily basis in setting up nationwide or international agreements, providing advice on equipment selection and monitoring regulations. Our goal is to help you carry out your plans with confidence, using custom-designed systems that meet your needs (for comfort, performance levels, support and service).

## Daikin Applied Development Center

Opened in May 2009, the Daikin Applied Development Center is the world's most advanced facility for heating, ventilation and air conditioning (HVAC) research and development. The purpose of the center is to develop and test advanced chiller, compressor and other HVAC technologies to reduce energy consumption and, ultimately the carbon footprint of the buildings where they will be used.

Find out more about the Daikin Applied Europe in the video below:




  
www.youtube.com/  
DaikinEurope



## Witness Testing Chiller testing facilities Daikin Applied Europe

We are industry leaders in air cooled and water cooled chiller technologies. Our performance in each condition can be shared through witness tests. During witness testing even the toughest design conditions can be simulated. Customers and consultants can appreciate product performance before its delivery, ensuring "peace of mind" chiller integration in the whole project. We have specific competencies and state of the art testing facilities to pursue these goals.

Find out more about our testing facilities in the video below:



  
www.youtube.com/  
DaikinEurope



# Tools and platforms

Have a question, looking for specific software applications, need detailed product information or looking for any other marketing tools? This overview gives you an idea of what we can offer.

## Selection software


Daikin Europe offers you a variety of building modelling, selection, simulation and quotation software tools to support your sales.

### Web-based chiller selection software

A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats. To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:  
> <http://tools.daikinapplied.eu/>

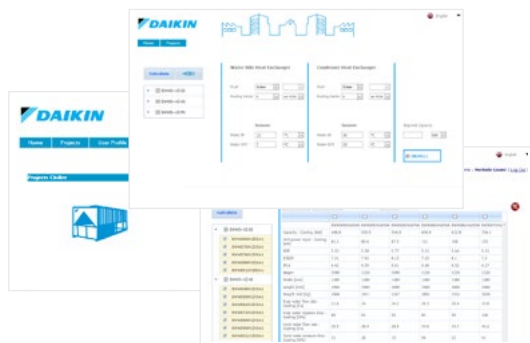

## Online support


### Business portal

- Experience our new extranet that thinks with you
- > Find information in seconds via a powerful search
  - > Customize the options so you see only info relevant for you
  - > Access via mobile or desktop via **my.daikin.eu**

### Daikin on Site

A new remote monitoring and control for chillers and air handling units has been developed by Daikin to give peace of mind to the end-customer.

- Using this new tool results in optimum use and costs over the system's entire lifetime:
- > enhanced control and measuring
  - > monitors the system
  - > reduces risks at the earliest possible moment
  - > keeps the system running as it was intended to

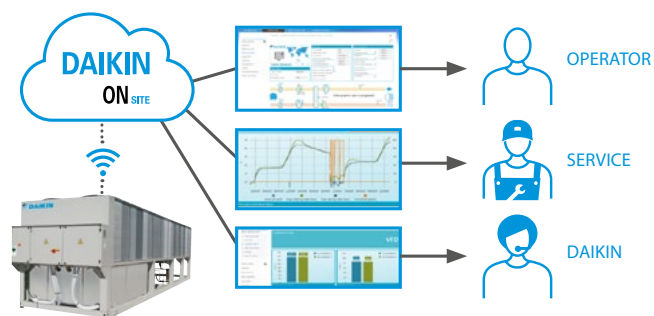

### ASTRA Web

- > Quick AHU selection that will save you precious time, drastically reducing selection time through the new software interface.
- > Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- > High selection quality, thanks to the intelligence embedded within the software core.

**BREEAM®**

# Daikin, the best partner for your green project

From 2015 onwards the majority of new building projects in Europe are expected to be green.

93% percent of developers & investors consider green certification important

BREEAM and LEED green building programmes are the two most important sustainable building certificates in Europe, covering more than 75% of the total sustainable-building certificate market.

## Property developers are setting high standards

- › Aiming for a BREEAM Excellent or LEED Gold target is no longer rare
- › The real challenge? Achieving these targets while staying within budget

## HVAC-R systems play an important role

- › Within the total green assessment & investment cost
- › They require the alignment of many different parties

BREEAM is a registered trademark of BRE (the Building Research Establishment Ltd. Community Trade Mark E5778551). The BREEAM marks, logos and symbols are the Copyright of BRE and are reproduced by permission.

It is essential to choose an HVAC-R partner with the knowledge and portfolio to achieve your BREEAM or LEED objectives, and other green needs.

Daikin has successfully participated in many green and sustainable projects. Helping builders achieve BREEAM Excellent, LEED Gold, NZEB and similar certificates has become one of our specialities.



**We have a team of BREEAM accredited professionals (APs) at your service!**

- › Over 17 APs across Europe
- › Assisting you to achieve your BREEAM certificate



**You get maximum support in scoring BREEAM credits & LEED points:**

- › Daikin Total HVAC-R Solutions
- › High seasonal efficiency technologies
- › Smart energy management with intelligent network
- › Boost your end score with innovative products & technologies

## Maximise your BREEAM and LEED green building programme score with Daikin solutions

### › **Manage up to 70% of your energy consumption with the Daikin Total Solution**

#### › **Top seasonal efficiency**

Both BREEAM and LEED green building programmes put the strongest focus on energy efficiency. This is exactly why it's so important to choose Daikin.

#### › **Smart air conditioning management with Intelligent Network**

To drastically reduce your energy consumption and CO<sub>2</sub> emissions it's not enough to simply make your equipment more efficient.


# Seasonal efficiency,

## Smart use of energy

### Challenging 20-20-20 environmental targets

The European Commission has set challenging targets for improving energy efficiency in the EU. These so-called 20-20-20 targets aim at a 20% reduction in CO<sub>2</sub> emissions, 20% share of renewable energy and a 20% reduction in the use of primary energy, all by the year 2020. To realise these objectives, Europe issued the Eco-Design Directive [2009/125/EC]. This sets minimum efficiency requirements for energy related products.

#### European action plan 20-20-20

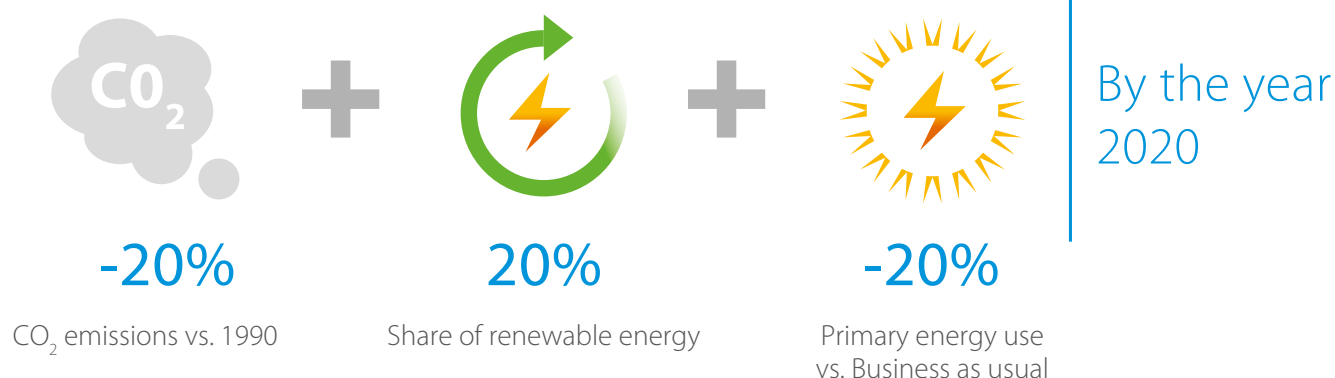

### Applied systems: products in scope

Since 26 September 2015, heat generators for space heating (LOT 1) also need to comply to these 20-20-20 targets. For the applied systems market it means that all heat pumps below 400 kW need to comply to minimum efficiency requirements. Heat pumps below 70 kW must be marked with a product energy label.

### Our service

Daikin helps its partners to meet their obligations regarding the Ecodesign Directive and energy labelling. Labels, product and technical fiches for each individual product are available as downloads at any time from the Energy Label Generator at [https://www.daikin.eu/en\\_us/about/daikin-innovations/seasonal-efficiency.html](https://www.daikin.eu/en_us/about/daikin-innovations/seasonal-efficiency.html).

# Chiller modernisation

## Be smart – replace components, not systems

### Our concept

Even if the R-22 chiller has been maintained well and is still in good condition, R-22 is no longer allowed to be used. That's why Daikin offers chiller modernisation packages. Not only is the chiller made compliant with the latest legislation, the technology upgrade also revives your system, increasing reliability and efficiency.

#### Main benefits

- › Convert R-22 to be compliant with legislation
- › Limit capital
- › Save money for future equipment thanks to the chiller's longer lifetime, increased reliability, and improved maintenance efficiency
- › Enhance energy efficiency up to +20% ESEER by manufacturer pre-engineered upgrade

#### Benefits for budget and risk management

- › No chiller removal
- › No water pipe work
- › No electrical modifications
- › Low logistic expenses (transport, crange, permissions ...)
- › Quick delivery
- › Government-sponsored subsidies may be available




Controller box upgrade





## Fact: R-22 has been banned in Europe\*

If your equipment is more than 15 years old, it probably still uses R-22 refrigerant. Since 31 December 2014 repairs to R-22 systems are prohibited, possibly resulting in unexpected downtime. Keep your business running at all times with Daikin replacement technology.

- 
- Soft starter
  - Inverter



Compressor  
upgrade



\* EU directive: Regulation (EC) No.2037/2000


# Day-to-day reliability and efficiency

## Inhouse development and manufacturing of compressors

Unlike many other air conditioning manufacturers, Daikin manufactures its own compressors. This is important because the compressor is the very heart of the air conditioning system, increasing the pressure and temperature of the refrigerant vapour, effectively concentrating the heat as it passes around the system. Daikin has always been at the forefront of developing compressor technology and now offers a comprehensive range of swing, scroll, screw and centrifugal compressors. As a result, inverter compressor control is applied throughout our product range, delivering enhanced comfort and system efficiency.



### Swing compressor

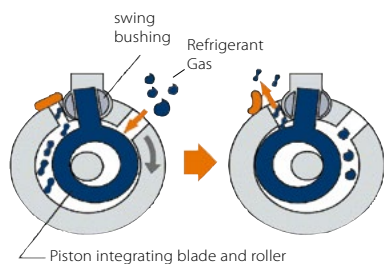

The mini chiller series EWAQ005-007ADVP & EWYQ005-007ADVP are equipped with a swing inverter compressor. This innovative design by Daikin has fewer moving parts allowing a smoother, more reliable operation with low vibration and low noise levels. The high-efficiency motor reduces energy consumption, resulting in energy cost savings.



### Scroll compressor for controlled capacity


Being compact, the Daikin scroll compressor is used with R-407C and R-410A to provide constant reliability and high efficiency throughout its service life. Designed for small and medium capacities, the scroll compressors are used with air cooled and water cooled chillers.

#### Characteristics:


- › Compact, simple yet robust design
- › Absence of valves and oscillating connecting mechanisms providing maximum reliability
- › Constant compression guaranteeing low energy consumption
- › Increased compression efficiency thanks to the absence of volumetric re-expansion
- › Low sound level
- › Low starting current



### Innovative frictionless centrifugal compressor

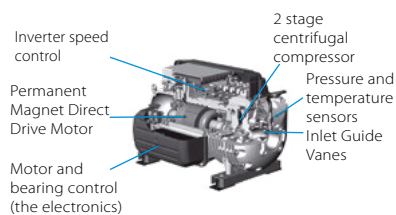

The innovative frictionless centrifugal compressor has an integrated VFD, as well as magnetic bearings, and delivers high levels of unit efficiency and reliability. The compressor's only moving part - the rotor shaft and impellers - are powered by the permanent magnetic direct-drive motor and kept levitated by a digitally controlled magnetic bearing system. This reduction in moving parts significantly increases unit reliability and reduces maintenance costs. As the condensing temperature and/or cooling load reduces, the speed of rotation reduces and movable inlet guide vanes, activated by the step motor, redirect gas flow into the first stage impeller once the compressor has reached its minimum speed. This delivers increased efficiency and cost savings during part-load operations.

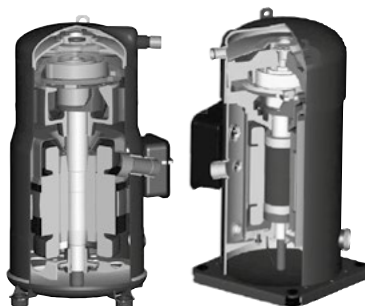


Whatever the requirements of the customer - large systems requiring constant capacity or small systems for flexibility - Daikin always provides a reliable and efficient solution.



### The single-screw stepless compressor for high capacity

At the heart of the larger Daikin chillers is a semi hermetic single screw compressor, designed, tested and manufactured in Daikin's own factories, in order to meet the highest capacity, performance and maintenance specifications. This compressor has been especially developed for operation with R-410A or R-134a refrigerants, guaranteeing unequalled reliability and many years of efficient operation. The bearing life is 100,000hrs with inspection and maintenance intervals every 40,000hrs.

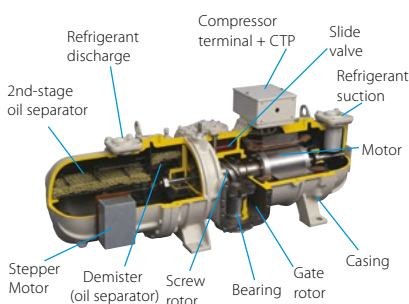

#### Characteristics:

- › Optimal performance through stepless capacity control chilled water temperatures. The unit capacity is infinitely variable from 30 - 100% on single circuit units and 15 -100 % on dual circuit units.
- › Compact, simple yet robust construction.
- › Using a main single screw and two gate rotors, axial and radial forces are balanced, thanks to the symmetrical compression guaranteeing low bearing loads.
- › Gate rotors made of polymer material result in closer tolerances with the main screw and reduced friction greatly improves compressor efficiency and lifetime.
- › No oil pump necessary - lubrication based on the differential pressure principle.
- › Easy access to both compressor and safety devices.
- › Star-Delta starter with low starting current as standard.




### Screw compressor with integrated inverter


#### Characteristics:

- › Compressor and inverter fully designed by Daikin
- › Inverter integral to the compressor body
- › Inverter refrigerant cooled
- › VVR = Variable Volume Ration for optimized efficiency
- › Enlarged discharge port and suction side for reduced refrigerant pressure drop
- › New optimized compressor motors

#### Main benefits:

- › Better ESEER & EER values
- › 30% more compact than single-screw compressor
- › Rapid payback time
- › Silent operations
- › Optimal comfort levels

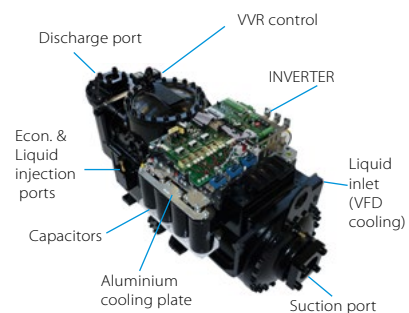



Daikin chillers offer the ultimate in reliability and flexibility — a reflection of the advanced technology inherent within them. Daikin chillers represent the sure and safe route to a comfortable environment and a process cooling solution that is clean and consistent.

# Table of content

# Chillers

<b>Why choose Daikin chillers</b>	<b>14</b>		
<b>Products Overview - Air cooled chillers, condensing units and Multipurpose units</b>	<b>18</b>		
<b>Products Overview - Water cooled and condenserless chillers</b>	<b>20</b>		
<b>Air cooled chillers cooling only</b>	<b>23</b>		
EWAQ-BVP	23		
EWAA-DV3P	24		
EWAA-DW1P	25		
EWAA-DV3P-H	26		
EWAA-DW1P-H	27		
<b>NEW</b> EWAT-CZ	28		
<b>NEW</b> EWYT-CZ	31		
EWAD-CF	34		
EWAD-TZS	38		
EWAD-TZS	39		
EWAD-TZX	40		
EWAD-TZP	42		
EWAD-TZSSC2/SLC2	44		
EWAD-TZSRC2	45		
EWAD-TZXS	46		
EWAH-TZS	47		
EWAH-TZX	49		
EWAH-TZP	51		
EWAD-TZX	53		
EWAH-TZSSC2/SLC2	54		
EWAH-TZSRC2	55		
EWAH-TZXSC2/XLC2	56		
EWAH-TZXRC2	57		
EWAD-T-SSC/SLC	58		
EWAD-T-XSC/XLC	59		
EWAD-T-XRC	60		
EWAT-B-SSB/SLB	64		
EWAT-B-SRB	65		
EWAT-B-XSB/XLB	66		
EWAT-B-XRB	67		
<b>Air cooled chillers Heat pump</b>	<b>68</b>		
EWYA-DV3P	68		
EWYA-DW1P	69		
EWYA-DW1P-H	70		
EWYA-DV3P-H	71		
EWYT-B-SS/SL	74		
EWYT-B-SR	75		
EWYT-B-XS/XL	76		
EWYT-B-XR	77		
EWYQ-BVP	79		
SEHVX-BW/SERHQ-BW1	80		
EWYD-BZSS	82		
EWYD-BZSL	83		
<b>Multipurpose unit</b>	<b>84</b>		
EWYD-4ZXS2	85		
EWYD-4ZXR2	86		
<b>Air cooled condensing unit</b>	<b>88</b>		
ERAD-E-SS	88		
ERAD-E-SL	89		
<b>Water cooled chillers</b>	<b>90</b>		
EWWQ-KBW1N	90		
EWHQ-G-SS	92		
EWWQ-G-SS	93		
EWWQ-L-SS	94		
EWWD-J-SS	95		
EWWH-J-SS	96		
EWWJ-SS	97		
EWWD-VZ	100		
EWWH-VZ	104		
<b>NEW</b> EWWJ-VZ	108		
EWLQ-KBW1N	111		
<b>Condenserless chillers</b>	<b>113</b>		
EWLQ-G-SS	113		
EWLQ-L-SS	114		
EWLD-J-SS	115		
EWLH-J-SS	116		
EWLS-J-SS	117		
EWLD-I-SS	118		
<b>Water cooled centrifugal chillers</b>	<b>120</b>		
EWWD-DZ	120		
EWWH-DZ	122		
EWWJ-DZ	124		
DWSC B vintage / DWDC B vintage	126		
<b>NEW</b> DWSC C vintage	127		

Accessories 128



## Daikin chillers

### Why choose Daikin chillers?

Daikin chillers are the perfect bridge between project requirements and customer satisfaction.

From the smallest chillers to the very largest, our quality control and attention detail is absolute.

Our systems have the **most advanced technologies**, deliver **the highest energy efficiencies** and **lowest running costs**, and are the gold standard for reliability and performance.

#### The widest and most flexible chiller portfolio

- › From the smallest mini chiller for residential use to the largest chiller for district cooling
- › Tailor made solutions based on the most advanced technologies
- › Wide range of options and accessories

#### Worldwide experience in chiller design and manufacturing

- › World's most advanced facilities for air conditioning research and development: the Applied Development Center in Minneapolis, Minnesota
- › Inhouse development and manufacturing of chiller main components (compressors, fans, condenser coils, software, etc...)
- › Chillers produced in European factories, in Milan and Ostend

#### The highest efficiency for every installation

- › Inverter technology over the whole capacity range
- › The lowest total cost of ownership and fast payback time

#### Quality and reliability

- › Daikin's integrated zero defect policy ensures quality of components and finished products
- › Each Daikin chiller is factory run-tested and subjected to quality audit before shipment

### Benefits for installers

- › Plug & play solutions
- › Maximum serviceability
- › Ideal solutions for retrofit projects

### Benefits for consultants

- › Energy efficient solutions without compromising on reliability and performance
- › Latest technology embedded in all our products

### Benefits for end users

- › Remarkable savings on running costs
- › Easy to customise the chiller to your application, environment and need thanks to more than 150 different options.


# Web-based chiller selection software

A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:  
<http://tools.daikinapplied.eu/>

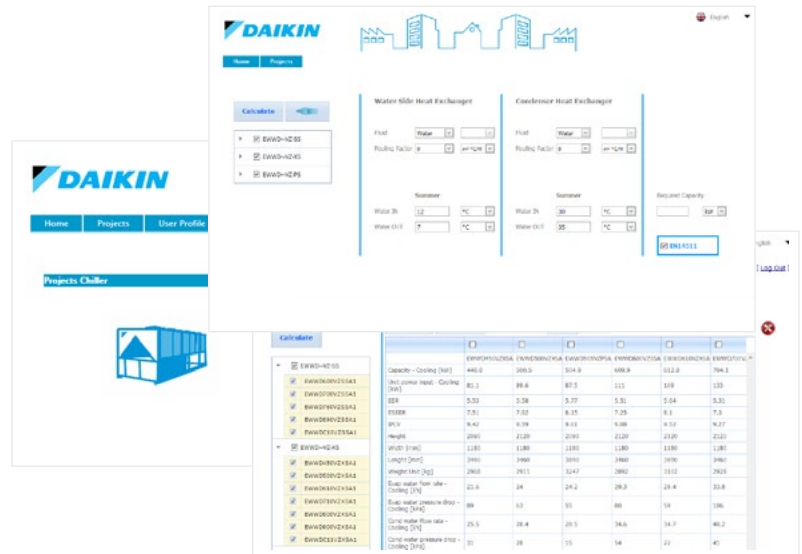

## Supporting tools

### Business portal

- › Experience our extranet that thinks with you at [my.daikin.eu](http://my.daikin.eu)
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop

### Website

- › [www.daikin.eu/en\\_us/product-group/chillers.html](http://www.daikin.eu/en_us/product-group/chillers.html)
- › Explore our product range
- › Find our solutions for applications
- › Get more commercial details on our flagship products

### Literature

- › Download or consult our literature for our professional network and end-customers



401 Chiller and air side equipment  
Product portfolio



416 Modular L  
Product profile



445 EWYD-4Z Multipurpose  
Product profile



404 EWAD-TZ B  
Product profile



418 Chiller series  
Product profile



OFFICE APPLICATION



AIR COOLED CHILLER INSTALLATION



AIR COOLED CHILLER INSTALLATION




INDUSTRIAL APPLICATION



HOTEL  
APPLICATION





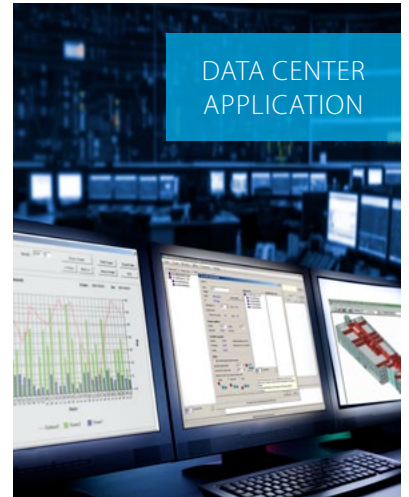















DATA CENTER  
APPLICATION



PROCESS COOLING  
APPLICATION




# Products overview

	Refrigerant type *	Refrigerant circuits	Inverter	Free cooling	Compressor			Water heat exchanger		Efficiency version			Sound version		
					Swing	Scroll	Screw	Plate **	Single pass shell and tube	Standard	High	Premium	Standard	Low	Reduced
<b>Cooling only</b>															
EWQA~BVP		R-410A	1	●	●			●	BPHE	●			●		
EWAA-DV3P-H/ DW1P-H		R-32	1	●	●			●	BPHE	●			●		
EWAT~CZN/P/H	 <b>NEW</b>	R-32	1-2	●		●		●	BPHE	●			●		
EWAD~CF		R-134a	2		●		●		●		●		●	●	●
EWAD-TZ B		R-134a	1-2	●			●	●	●	●	●	●	●	●	●
EWAH-TZ B		R-1234ze(E)	1-2	●			●	●	●	●	●	●	●	●	●
EWAD-TZ C		R-134a	1-2	●			●	●	●	●	●	●	●	●	●
EWAH-TZ C		R-1234ze(E)	1-2	●			●	●	●	●	●	●	●	●	●
EWAD-T-		R-134a	2				●		●	●	●	●	●	●	●
EWAT-B		R-32	1-2			●		●		●	●		●	●	●
<b>Heat pump</b>															
EWYQ~BVP		R-410A	1	●	●			●	BPHE	●			●		
EWYA-DV3P-H/ DW1P-H		R-32	1	●	●			●	BPHE	●			●		
EWYT~CZN/P/H	 <b>NEW</b>	R-32	1-2	●		●		●	BPHE	●			●		
EWYT-B		R-32	1-2			●		●	BPHE	●	●		●	●	●
SEHVX-BW SERHQ-BW1		R-410A	1	●		●		●	BPHE	●			●		
EWYD~BZ		R-134a	2-3	●			●		●	●			●	●	
<b>Condensing unit</b>															
ERAD~E-		R-134a	1				●			●			●	●	
<b>Multipurpose unit</b>															
EWYD-4Z		R-134a	2	●			●		●		●		●	●	●







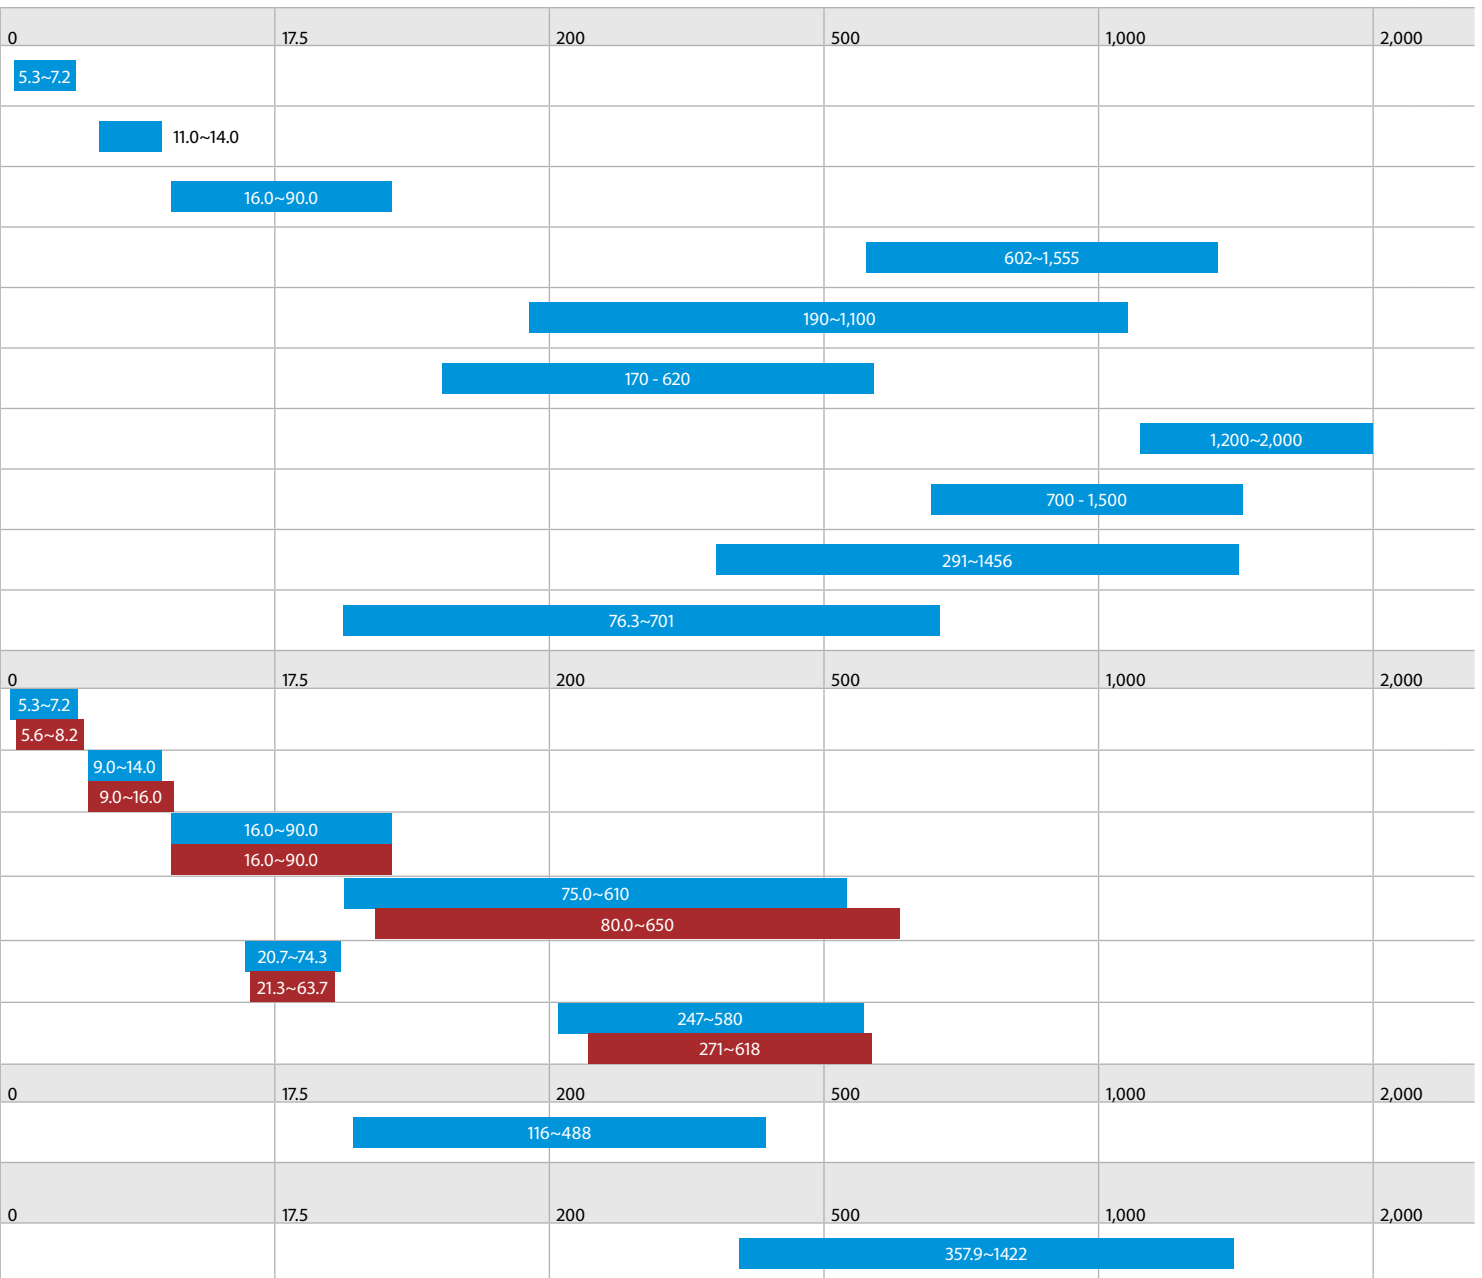






















\* (GWP) : R-410A (2087.5), R-134a (1430) - \*\* BPHE: Brazed plate heat exchanger

## Air cooled chillers, condensing units and Multipurpose units

Cooling capacity (kW)  
Heating capacity (kW)





# Products overview

	Refrigerant Type *	Refrigerant circuits	Inverter 	Compressor			Water heat exchanger			Efficiency version			Sound version
				Scroll 	Screw 	Centrifugal 	Plate ** 	Single pass shell and tube 	Shell and tube 	Standard	High	Premium	Standard
<b>Water cooled chillers (Cooling only and Heat Pump)</b>													
EWQW-KBW1N 	R-410a	1-2		●			●			●			●
EWHQ~G- 	R-410A	1		●			●			●			●
EWQW~G- 	R-410A	1		●			●			●			●
EWQW~L- 	R-410A	2		●			●			●			●
EWWD~J- 	R-134a	1			●		●			●			●
EWWH-J- 	R1234ze	1			●		●			●			●
EWWS-J- 	R-513A	1			●		●			●			●
EWWD-VZ 	R-134a	1-2	●		●				● Flooded	●	●	●	●
EWWH-VZ 	R-1234ze(E)	1-2	●		●				● Flooded	●	●	●	●
EWWS-VZ <b>NEW</b> 	R-513A	1-2	●		●				● Flooded	●	●	●	●
<b>Condenserless chillers</b>													
EWLQ-KBW1N 	R-410A	1-2		●			● BPHE			●			●
EWLQ~G- 	R-410A	1		●			●			●			●
EWLQ~L- 	R-410A	2		●			●			●			●
EWLD~J- 	R-134a	1			●		●			●			●
EWLD~I- 	R-134a	1-2-3			●			●		●			●
EWLH-J- 	R1234ze	1			●		●			●			●
EWLS-J- 	R-513A	1			●		●			●			●
<b>Water cooled centrifugal chillers</b>													
EWWD-DZ 	R-134a	1				●			●		●		●
EWWH-DZ 	R-1234ze(E)	1				●			●		●		●
DWSC B / DWDC B vintage 	R-134a and R513A	1	optional			●			● Flooded		●		●
DWSC C vintage <b>NEW</b> 	R-134a, R-513A and R-1234ze	1	optional			●			● Flooded		●		●
6,000 RT CENTRIFUGAL 	R-134a	2 per chiller				●		● Flooded			●		●

\* (GWP) : R-410A (2087.5), R-134a (1430), R-407C (1773.9) - \*\* BPHE: Brazed plate heat exchanger

Cooling capacity (kW)  
Heating capacity (kW)

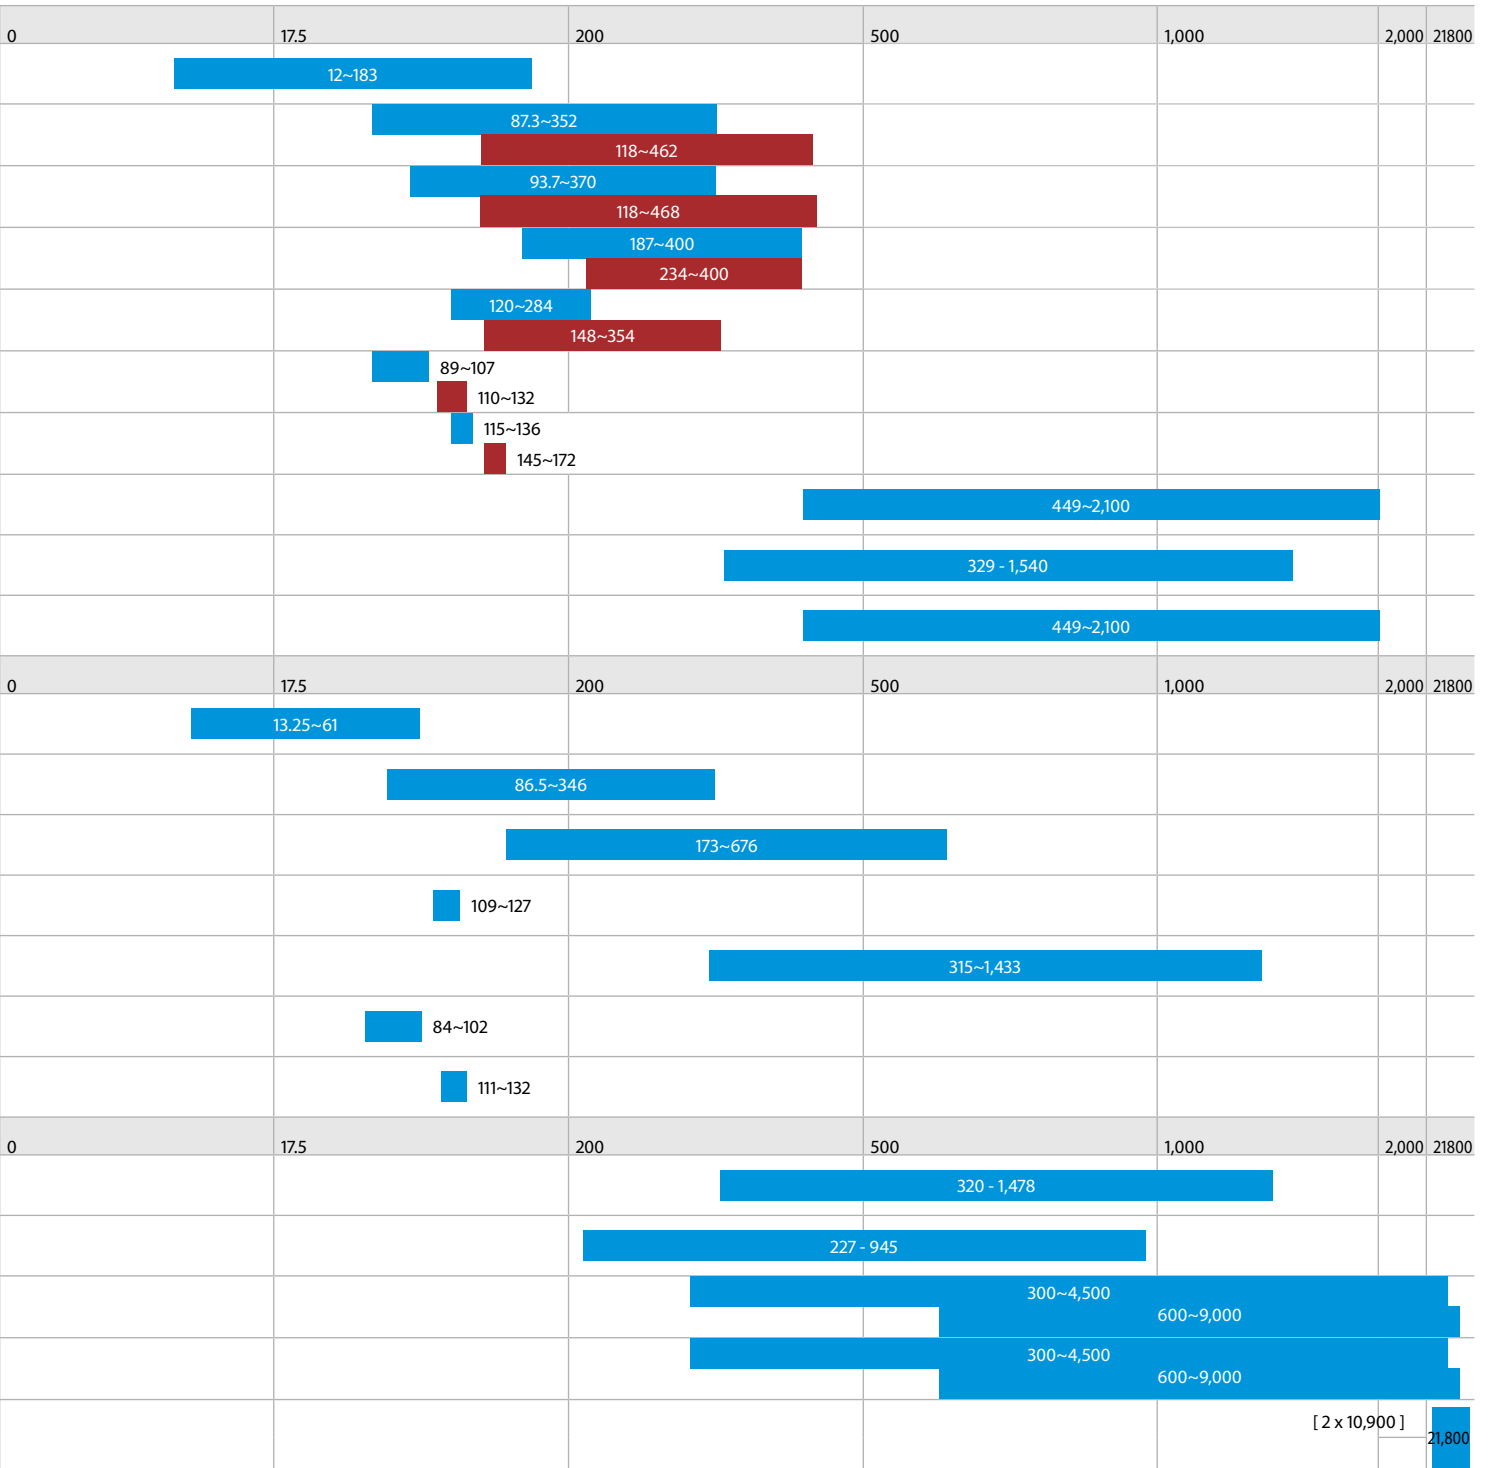

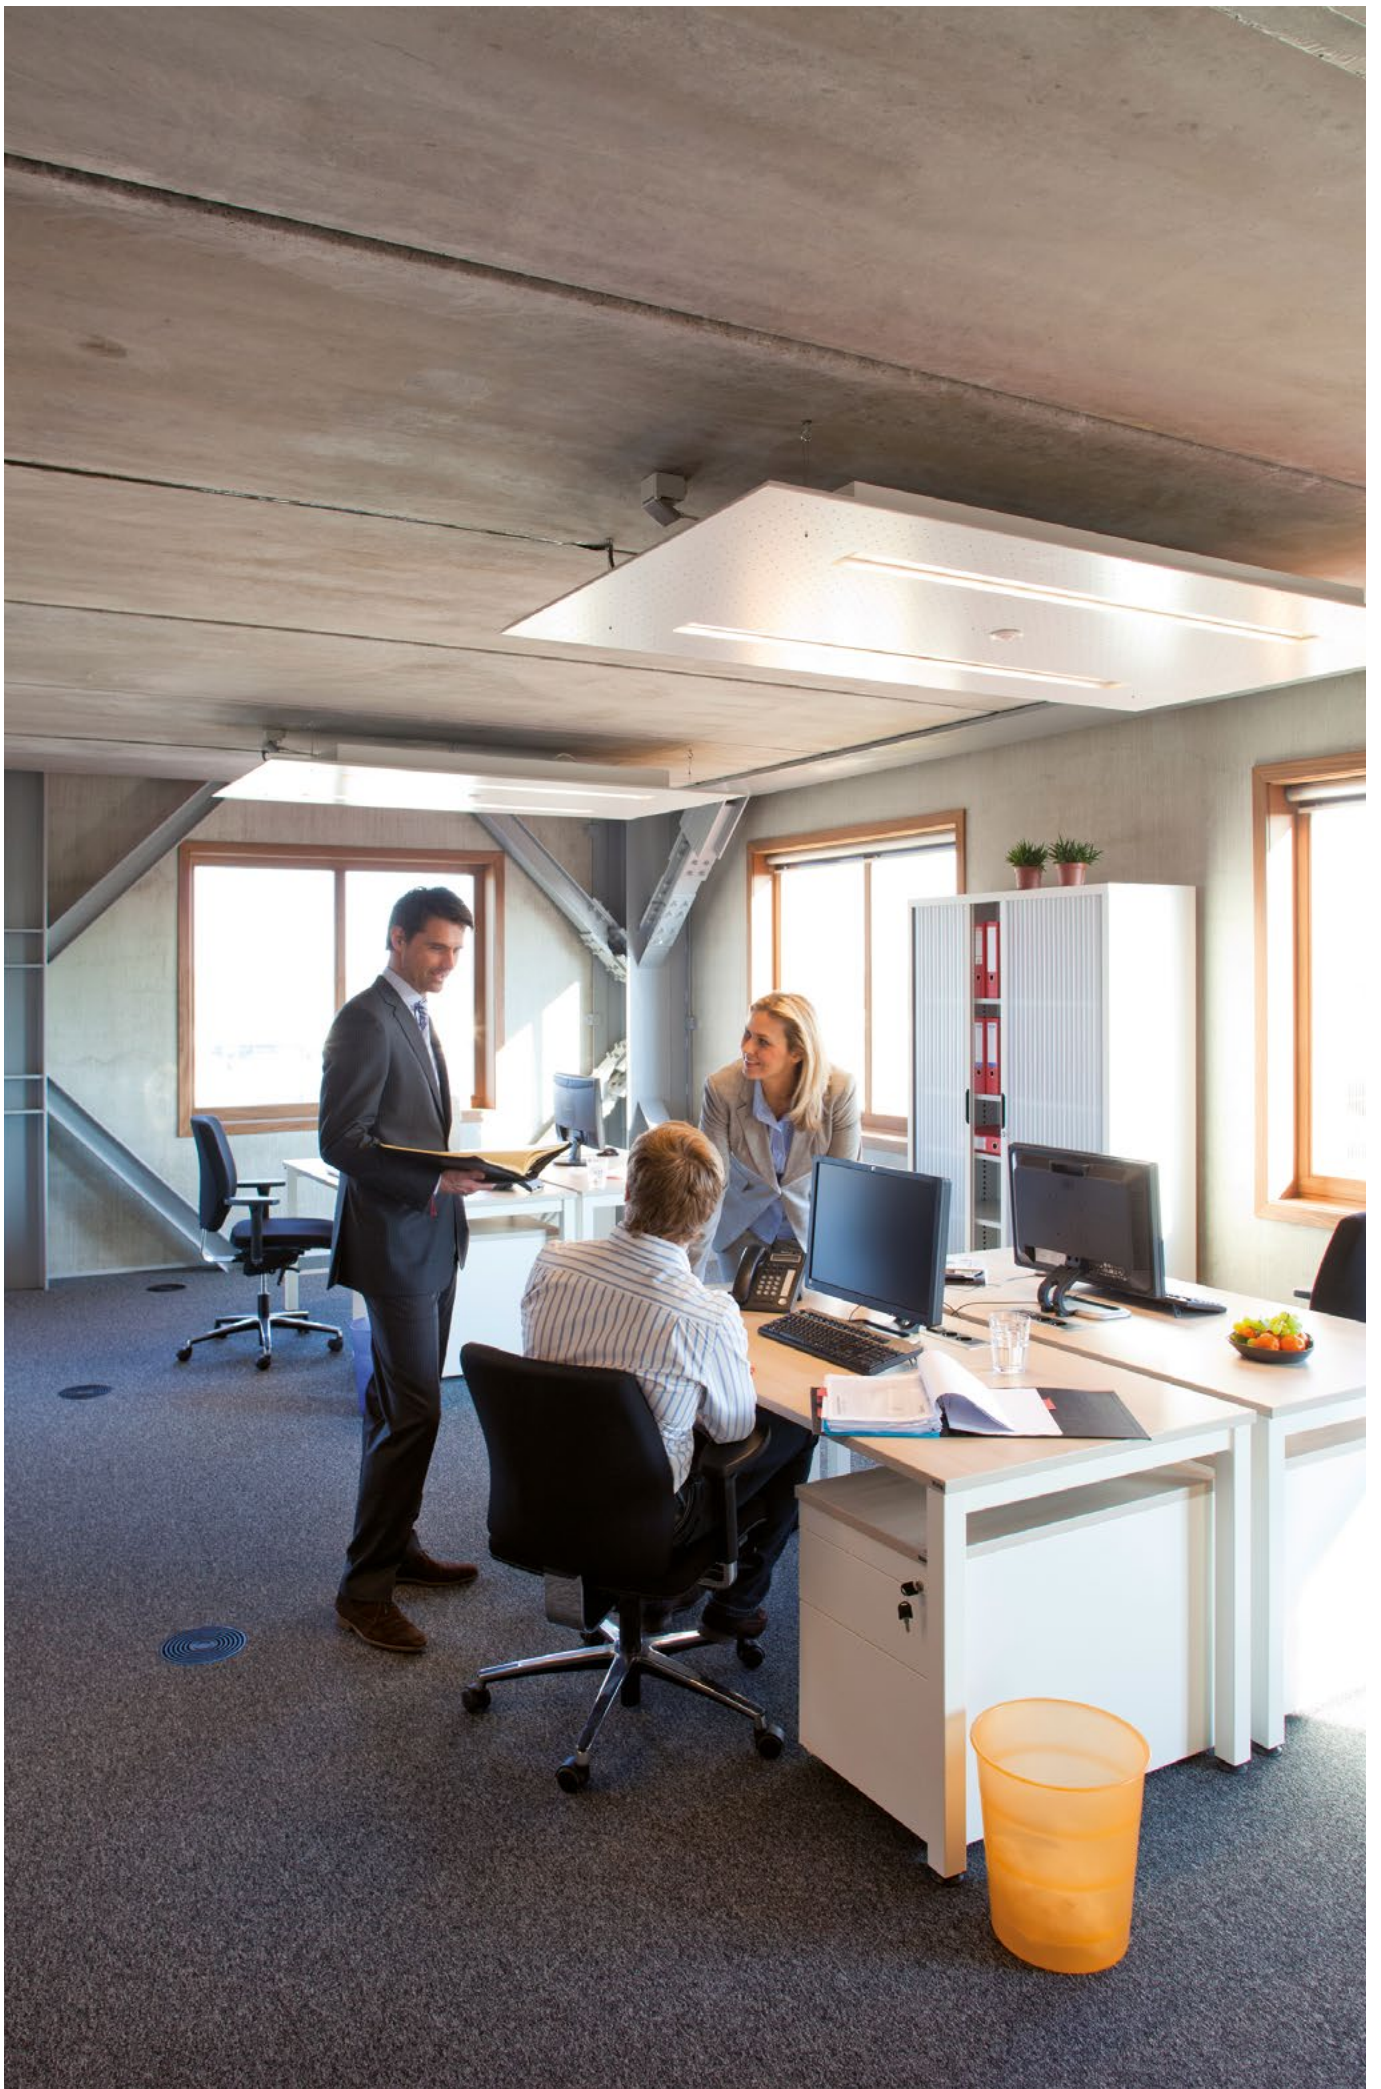

# Air cooled mini inverter chiller

- › Top product in terms of energy efficiency and operation range
- › All capacities available in 2 versions: standard version and version with OP10 option (no freeze up of water when not in operation thanks to the water piping heater tape)
- › Easy, plug and play' installation
- › Amongst the most quiet units in the market (63dBA - sound power)
- › Single phase power supply and low starting currents make the unit ideal for residential applications
- › Weight reduced with 20% compared with the previous models.
- › Built-in Hydraulic kit: no buffer tank required, standard inverter driven pump, main flow sensor and switch included.
- › Standard wired remote control enables setting of different set points (cooling, heating, water leaving temperature) or based on outdoor conditions (weather dependent control). It has an alarm history, night time noise reduction function and is language based.



More details and final information can be found by scanning or clicking the QR codes.



EWAQ-BVP

		EWAQ-BVP		004	005	006	008
Cooling Only	A Condition 35°C Pdc	kW		4.00	4.93	5.88	7.95
	ηs,c	%		172	173	174	178
SEER				4.38	4.39	4.42	4.53
Cooling capacity	Nom.	kW		4.00 (1) / 4.01 (2)	4.93 (1) / 5.07 (2)	5.88 (1) / 6.07 (2)	7.95 (1) / 8.23 (2)
Power input	Cooling Nom.	kW		1.27 (1) / 0.840 (2)	1.61 (1) / 1.12 (2)	1.87 (1) / 1.13 (2)	2.57 (1) / 1.65 (2)
Capacity control	Method	Variable (inverter)					
EER				3.14 (1) / 4.80 (2)	3.06 (1) / 4.51 (2)	3.15 (1) / 5.35 (2)	3.10 (1) / 4.99 (2)
Dimensions	Unit	Height	mm	735		997	
		Width	mm	1,090		1,160	
		Depth	mm	350		380	
Weight	Unit	kg		83		106	
Water heat exchanger	Type	Braze plate					
	Water volume	l		1		2	
Air heat exchanger	Type	Cross fin coil/Hi-X tubes and chromate coated waffle louvre fins			Cross fin coil/Hi-X tubes and PE coated waffle louvre fins		
Compressor	Type	Hermetically sealed swing compressor					
	Quantity	1					
Fan	Type	Propeller fan					
	Quantity	1					
	Air flow rate	Cooling Nom.	m <sup>3</sup> /min	53		72 (1)	
Sound power level	Cooling Nom.	dBA		63 (1)	64 (1)	69 (1)	
Sound pressure level	Cooling Nom.	dBA		48	49	52	53
Operation range	Air side	Cooling	Min.~Max.	°CDB		10~43	
	Water side	Cooling	Min.~Max.	°CDB		5~22	
Refrigerant	Type/GWP	R-410A/2,088			R-410A/2,087.5		
	Control	Electronic expansion valve					
	Circuits	Quantity		1			
Refrigerant charge	Per circuit	kg		2.10		2.70	
	Per circuit	TCO2Eq		4.4		5.6	
Water circuit	Piping connections diameter		1" MBSP				
Unit	Starting current	Max	A	15.7		19.9	
	Running current	Max	A	15.7		19.9	
Power supply	Phase/Frequency/Voltage		Hz/V				
			1N~/50/230				

(1) Cooling: entering evaporator water temp. 12°C; leaving evaporator water temp. 7°C; ambient air temp. 35°C | (2) Cooling: entering evaporator water temp. 23°C; leaving evaporator water temp. 18°C

# Air cooled mini inverter chiller

- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Inverter chiller
- > Daikin swing compressor
- > New casing for the outdoor units
- > Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P

Cooling Only		EWAA		011DV3P		014DV3P		016DV3P		
Space cooling	A Condition 35°C Pdc	kW		11.6		12.8		14.0		
	ηs,c	%		229		226		221		
SEER				5.79		5.71		5.59		
Cooling capacity	Nom.	kW		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Power input	Cooling Nom.	kW		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)		
Capacity control	Method					Variable (inverter)				
EER				3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)		
Dimensions	Unit	Height	mm		870					
		Width	mm		1,380					
		Depth	mm		460					
Weight	Unit	kg		147						
Water heat exchanger	Type			Plate heat exchanger						
	Water volume	l		2						
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler						
Compressor	Type			Hermetically sealed swing inverter compressor						
	Quantity			1						
Fan	Type			Propeller fan						
	Quantity			1						
Sound power level	Air flow rate Cooling	Nom.	m <sup>3</sup> /min		70		85			
	Cooling	Nom.	dBA		67.0		69.0			
Sound pressure level	Cooling	Nom.	dBA		47.7		50.8		51.0	
Operation range	Air side Cooling	Min.~Max.	°CDB		10~43					
	Water side Cooling	Min.~Max.	°CDB		5~22					
Refrigerant	Type/GWP			R-32/675.0						
	Control			Electronic expansion valve						
	Circuits	Quantity			1					
Refrigerant charge	Per circuit	kg		3.80						
	Per circuit	TCO2Eq		2.6						
Unit	Running	Max	A		30.8					
	current									
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/230						

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB



# Air cooled mini inverter chiller

- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Inverter chiller
- > Daikin swing compressor
- > New casing for the outdoor units
- > Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DW1P

Cooling Only				EWAA	011DW1P	014DW1P	016DW1P
Space cooling	A Condition 35°C Pdc			kW	11.6	12.8	14.0
	ηs,c			%	229	226	221
SEER					5.79	5.71	5.59
Cooling capacity	Nom.			kW	11.6 (1) / 11.5 (2)	12.8 (1) / 12.7 (2)	14.0 (1) / 15.3 (2)
Power input	Cooling	Nom.		kW	3.56 (1) / 2.17 (2)	4.06 (1) / 2.51 (2)	4.58 (1) / 3.24 (2)
Capacity control	Method			Variable (inverter)			
EER					3.26 (1) / 5.31 (2)	3.16 (1) / 5.04 (2)	3.06 (1) / 4.74 (2)
Dimensions	Unit	Height			mm	870	
		Width			mm	1,380	
		Depth			mm	460	
Weight	Unit			kg	147		
Water heat exchanger	Type			Plate heat exchanger			
	Water volume			l	2		
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler			
Compressor	Type			Hermetically sealed swing inverter compressor			
	Quantity			1			
Fan	Type			Propeller fan			
	Quantity			1			
Sound power level	Cooling	Nom.		m <sup>3</sup> /min	70	85	
					70	69.0	
Sound pressure level	Cooling	Nom.		dBa	47.7	50.8	51.0
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43		
	Water side	Cooling	Min.~Max.	°CDB	5~22		
Refrigerant	Type/GWP			R-32/675.0			
	Control			Electronic expansion valve			
	Circuits	Quantity		1			
Refrigerant charge	Per circuit			kg	3.80		
	Per circuit			TCO2Eq	2.6		
Unit	Running	Max current		A	14.0		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400		

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

# Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P-H

Cooling Only		EWAA		011DV3P-H-		014DV3P-H-		016DV3P-H-	
Space cooling	A Condition 35°C Pdc	kW		11.6		12.8		14.0	
	ηs,c	%		229		226		221	
SEER				5.79		5.71		5.59	
Cooling capacity	Nom.	kW		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)	
Power input	Cooling Nom.	kW		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
Capacity control	Method					Variable (inverter)			
EER				3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)	
Dimensions	Unit	Height	mm	870		1,380		460	
		Width	mm						
		Depth	mm						
Weight	Unit	kg		147					
Water heat exchanger	Type			Plate heat exchanger					
	Water volume	l		2					
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler					
Compressor	Type			Hermetically sealed swing inverter compressor					
	Quantity			1					
Fan	Type			Propeller fan					
	Quantity			1					
Sound power level	Air flow rate Cooling	Nom.	m <sup>3</sup> /min	70		85			
	Cooling	Nom.	dBA	67.0		69.0			
Sound pressure level	Cooling	Nom.	dBA	47.7		50.8		51.0	
Operation range	Air side Cooling	Min.~Max.	°CDB	10~43					
	Water side Cooling	Min.~Max.	°CDB	5~22					
Refrigerant	Type/GWP			R-32/675.0					
	Control			Electronic expansion valve					
	Circuits	Quantity		1					
Refrigerant charge	Per circuit	kg		3.80					
	Per circuit	TCO2Eq		2.6					
Unit	Running current	Max	A	30.8					
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/230					

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

# Air cooled mini inverter chiller

- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Inverter chiller
- > Daikin swing compressor
- > New casing for the outdoor units
- > Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DW1P-H

Cooling Only		EWAA		011DW1P-H-		014DW1P-H-		016DW1P-H-	
Space cooling	A Condition 35°C Pdc	kW		11.6		12.8		14.0	
	ηs,c	%		229		226		221	
SEER				5.79		5.71		5.59	
Cooling capacity	Nom.	kW		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)	
Power input	Cooling Nom.	kW		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
Capacity control	Method					Variable (inverter)			
EER				3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)	
Dimensions	Unit	Height	mm			870			
		Width	mm			1,380			
		Depth	mm			460			
Weight	Unit	kg				147			
Water heat exchanger	Type					Plate heat exchanger			
	Water volume	l				2			
Air heat exchanger	Type					High efficiency fin and tube type with integral subcooler			
Compressor	Type					Hermetically sealed swing inverter compressor			
	Quantity					1			
Fan	Type					Propeller fan			
	Quantity					1			
Sound power level	Air flow rate Cooling	Nom.	m <sup>3</sup> /min	70		85			
	Cooling	Nom.	dBA	67.0		69.0			
Sound pressure level	Cooling	Nom.	dBA	47.7		50.8		51.0	
Operation range	Air side Cooling	Min.~Max.	°CDB			10~43			
	Water side Cooling	Min.~Max.	°CDB			5~22			
Refrigerant	Type/GWP					R-32/675.0			
	Control					Electronic expansion valve			
Refrigerant charge	Circuits	Quantity				1			
	Per circuit		kg			3.80			
	Per circuit		TCO2Eq			2.6			
Unit	Running current	Max	A			14.0			
Power supply	Phase/Frequency/Voltage	Hz/V				3~/50/400			

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

# Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWAT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZN

Cooling Only				EWAT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2	
Space cooling	A Condition Pdc 35°C			kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
	ηs,c			%	197		200	205	201	213	210	205	198	
SEER					5.00		5.06	5.21	5.09	5.41	5.33	5.21	5.03	
Cooling capacity	Nom.			kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
Power input	Cooling Nom.			kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0	
Capacity control	Method			Inverter controlled										
	Minimum capacity			%	18	14	12	19	15	14	12	15	14	
EER					2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84	
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height		mm	1,878									
		Width		mm	1,152				1,752		2,306		2,906	3,506
		Depth		mm	802					814				
Weight	Unit			kg	222	245		340	339	480		574	672	
		Operation weight		kg	223	247		343	342	486		580	680	
Water heat exchanger	Type			Braze plate heat exchanger										
	Water volume			l	1	2				5			8	
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2	
Water pressure drop			Nom.	kPa	20	11	16	19	28	10	14	22	20	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum										
Compressor	Type			Scroll compressor										
	Quantity			1					2					
Fan	Type			Axial										
	Quantity			1				2			3	4		
	Speed			rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling	Nom.		dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0		
Sound pressure level		Nom.		dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675										
	Charge			kg	3.00	5.50		7.00	8.00	12.0		13.0	16.0	
	Circuits Quantity				1					2				
Piping connections	Evaporator water inlet/outlet (OD)				1"1/4					2"				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWAT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZP

Cooling Only				EWAT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2		
Space cooling	A Condition Pdc 35°C			kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6		
	ηs,c			%	209	213	225	211	228	216	211	204			
SEER					5.30	5.41	5.70	5.36	5.76	5.48	5.34	5.18			
Cooling capacity	Nom.			kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8		
Power input	Cooling Nom.			kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1		
Capacity control	Method			Inverter controlled											
	Minimum capacity			%	18	14	12	19	15	14	12	15	14		
EER					2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85		
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61		
Dimensions	Unit	Height		mm	1,878										
		Width		mm	1,152				1,752			2,306		2,906	3,506
		Depth		mm	802					814					
Weight	Unit			kg	256	278	383	382	531	630	727				
	Operation weight			kg	257	280	386	385	537	636	735				
Water heat exchanger	Type			Braze plate heat exchanger											
	Water volume			l	1	2				5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2		
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20		
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum											
Compressor	Type			Scroll compressor											
	Quantity				1					2					
Fan	Type			Axial											
	Quantity				1				2			3	4		
	Speed			rpm	800	900	700	900	700	900	800	900			
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	-					
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	-					
Refrigerant	Type/GWP			R-32/675											
	Charge			kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0				
	Circuits Quantity				1					2					
Piping connections	Evaporator water inlet/outlet (OD)				1"1/4					2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWAT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZH

Cooling Only				EWAT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2	
Space cooling	A Condition Pdc 35°C			kW	16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7	
	ηs,c			%	205	210	211	224	210	227	213	208	202	
Cooling capacity	Nom.			kW	16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9	
Power input	Cooling	Nom.		kW	5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2	
Capacity control	Method			Inverter controlled										
	Minimum capacity			%	18	14	12	19	15	14	12	15	14	
EER					2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85	
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878										
		Width	mm	1,152				1,752			2,306		2,906	3,506
		Depth	mm	802								814		
Weight	Unit			kg	256	278	383	382	531		630	727		
	Operation weight			kg	257	280	386	385	537		636	735		
Water heat exchanger	Type			Braze plate heat exchanger										
	Water volume			l	1	2				5			8	
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.20	
		Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum										
Compressor	Type			Scroll compressor										
	Quantity			1									2	
Fan	Type			Axial										
	Quantity			1				2			3		4	
	Speed			rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0			
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0			
Refrigerant	Type/GWP			R-32/675										
	Charge			kg	3.00	5.50	7.00	8.00	12.0		13.0	16.0		
	Circuits			Quantity	1					2				
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4					2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



# Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWYT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZN

Heating & Cooling				EWYT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2	
Space cooling	A Condition	Pdc	kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
	35°C			197		200	205	201	213	210	205	198		
SEER	ηs,c		%	5.00	5.06	5.21	5.09	5.41	5.33	5.21	5.03			
Space heating	Average climate water outlet 35°C	General	SCOP	3.89	4.00	4.07	4.06	4.07	4.02	4.00	3.98	4.00		
				Seasonal space heating eff. class	A++									
Cooling capacity	Nom.		kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
Heating capacity	Nom.		kW	15.9	20.2	24.8	32.4	39.4	40.3	49.8	61.9	85.8		
Power input	Cooling	Nom.	kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0		
		Heating	Nom.	kW	4.70	5.80	7.50	9.40	11.8	11.9	15.4	19.1	27.2	
Capacity control	Method			Inverter controlled										
	Minimum capacity		%	18	14	12	19	15	14	12	15	14		
EER				2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84		
COP				3.41	3.46	3.33	3.45	3.33	3.38	3.24	3.23	3.16		
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61		
Dimensions	Unit	Height	mm	1,878										
		Width	mm	1,152				1,752			2,306		2,906	3,506
		Depth	mm	802								814		
Weight	Unit	Operation weight		kg	227	252		350	349	494		588	693	
				kg	228	254		353	352	500		594	701	
Water heat exchanger	Type			Braze plate heat exchanger										
	Water volume		l	1	2				5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2	
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1	
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20	
Heating		Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1		
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum										
Compressor	Type			Scroll compressor										
	Quantity			1					2					
Fan	Type			Axial										
	Quantity			1			2			3		4		
	Speed		rpm	800	900	700	900	700	900	800	900			
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0			
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0			
Refrigerant	Type/GWP			R-32/675										
	Charge		kg	3.00	5.50		7.00	8.00	12.0		13.0	16.0		
	Circuits		Quantity		1					2				
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4					2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



# Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWYT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZP

Heating & Cooling				EWYT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2
Space cooling	A Condition	Pdc	kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6	
	35°C												
	ηs,c		%	209	213	225	211	228	216	211	204		
SEER				5.30	5.41	5.70	5.36	5.76	5.48	5.34	5.18		
Space heating	Average climate water outlet 35°C	General	SCOP	4.03	4.19	4.18	4.19	4.12	4.01	4.04			
				Seasonal space heating eff. class									A++
Cooling capacity	Nom.		kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8	
Heating capacity	Nom.		kW	15.6	19.9	24.6	32.1	39.0	40.0	49.5	61.4	85.3	
Power input	Cooling	Nom.	kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1	
	Heating			4.63	5.81	7.42	9.32	11.7	11.8	15.3	19.2	27.3	
Capacity control	Method			Inverter controlled									
	Minimum capacity		%	18	14	12	19	15	14	12	15	14	
EER				2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85	
COP				3.37	3.43	3.31	3.44	3.33	3.38	3.23	3.20	3.13	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878									
		Width	mm	1,152			1,752			2,306		2,906	3,506
		Depth	mm	802				814					
Weight	Unit		kg	261	286	393	392	546	644	749			
	Operation weight		kg	262	288	396	395	551	650	757			
Water heat exchanger	Type			Braze plate heat exchanger									
	Water volume		l	1	2			5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9	2.4	3.0	4.1	
Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20	
	Heating	Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum									
Compressor	Type			Scroll compressor									
	Quantity			1				2					
Fan	Type			Axial									
	Quantity			1			2			3	4		
	Speed		rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0	81.0	83.0	85.0			
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675									
	Charge		kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0			
	Circuits	Quantity		1				2					
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4				2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing





# Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWYT-CZ\_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZH

Heating & Cooling				EWYT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2
Space cooling	A Condition	Pdc	kW	16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7	
	35°C												
	ηs,c		%	205	210	211	224	210	227	213	208	202	
SEER				5.20	5.32	5.34	5.67	5.34	5.76	5.40	5.27	5.12	
Space heating	Average climate water outlet 35°C	General	SCOP	3.88	4.06	4.08	4.11	4.13	4.14	4.09	3.94	4.00	
				Seasonal space heating eff. class									A++
Cooling capacity	Nom.		kW	16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9	
Heating capacity	Nom.		kW	15.5	19.8	24.5	32.0	38.9	39.9	49.4	61.3	85.2	
Power input	Cooling	Nom.	kW	5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2	
	Heating			4.80	6.00	7.60	9.50	11.9	12.0	15.4	19.3	27.4	
Capacity control	Method			Inverter controlled									
	Minimum capacity			%	18	14	12	19	15	14	12	15	14
EER				2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85	
COP				3.24	3.31	3.22	3.37	3.28	3.33	3.20	3.17	3.12	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878									
		Width	mm	1,152			1,752			2,306		2,906	3,506
		Depth	mm	802						814			
Weight	Unit	Operation weight		kg	261	286		393	392	546		644	749
				kg	262	288		396	395	551		650	757
Water heat exchanger	Type			Braze plate heat exchanger									
	Water volume			l	1	2			5			8	
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20
Heating		Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum									
Compressor	Type			Scroll compressor									
	Quantity			1					2				
Fan	Type			Axial									
	Quantity			1			2			3	4		
	Speed			rpm	800	900	700	900	700	900	800	900	
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0		
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675									
	Charge			kg	3.00	5.50	7.00	8.00	12.0		13.0	16.0	
	Circuits			Quantity	1					2			
Piping connections				Evaporator water inlet/outlet (OD)	1"1/4					2"			

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

# Air cooled screw chiller with free cooling, high efficiency, standard/low sound

- › Free cooling chiller for space cooling and industrial processes
- › Stepless single-screw compressor
- › Greater energy savings and reduced CO<sub>2</sub> emissions during cold season
- › Wide operating range: NEW OPTION 187 (high evaporator leaving temperature up to 25°C)
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWAD-CFXS



EWAD-CFXL

Cooling only				EWAD-CFXS/XL	640	770	850	900	C10	C11	C12	C13	C14	C15	C16
Cooling capacity	Nom.		kW	640 (1) / 415 (2)	772 (1) / 510 (2)	852 (1) / 583 (2)	902 (1) / 612 (2)	1,027 (1) / 701 (2)	1,089 (1) / 734 (2)	1,269 (1) / 902 (2)	1,349 (1) / 957 (2)	1,435 (1) / 963 (2)	1,493 (1) / 1,013 (2)	1,555 (1) / 1,039 (2)	
Power input	Cooling	Nom.	kW	257 (1) / 53.7 (2)	272 (1) / 62.0 (2)	293 (1) / 64.7 (2)	324 (1) / 69.8 (2)	360 (1) / 75.7 (2)	399 (1) / 83.4 (2)	397 (1) / 86.4 (2)	439 (1) / 92.8 (2)	454 (1) / 101 (2)	492 (1) / 109 (2)	530 (1) / 115 (2)	
Capacity control	Method			Stepless											
	Minimum capacity		%	12.5											
EER				2.49 (1) / 11.91 (2)	2.84 (1) / 12.44 (2)	2.90 (1) / 13.17 (2)	2.78 (1) / 12.93 (2)	2.85 (1) / 13.56 (2)	2.73 (1) / 13.05 (2)	3.19 (1) / 14.68 (2)	3.08 (1) / 14.55 (2)	3.16 (1) / 14.21 (2)	3.04 (1) / 13.72 (2)	2.93 (1) / 13.50 (2)	
IPLV				3.86	4.03	4.10	4.05	4.00	3.95	4.36	4.25	4.36	4.35	4.26	
Dimensions	Unit	Height	mm	2,565											
		Width	mm	2,480											
		Length	mm	6,300	7,200	8,100	9,000	9,000	10,800	10,800	12,600	14,400	14,400	16,200	18,000
Weight (XS)	Unit		kg	7,760	8,340	8,900	10,160	10,420	11,900	12,540	14,516	14,596	16,646		
	Operation weight		kg	8,515	9,100	9,705	11,169	11,429	13,276	14,516	14,596	16,646			
Weight (XL)	Unit		kg	8,050	8,620	9,190	10,450	10,710	12,190	12,830	12,910	14,936			
	Operation weight		kg	8,795	9,390	9,995	11,459	11,719	13,566	14,806	14,886	16,936			
Water heat exchanger	Type			Single pass shell & tube											
	Water	Cooling	Nom.	l/s	27.8 (1) / 85 (1)	33.5 (1) / 105 (1)	37.0 (1) / 90 (1)	39.2 (1) / 101 (1)	44.6 (1) / 111 (1)	47.3 (1) / 124 (1)	55.1 (1) / 124 (1)	58.6 (1) / 110 (1)	62.4 (1) / 139 (1)	64.9 (1) / 150 (1)	67.6 (1) / 162 (1)
	Water	Cooling	Nom.	kPa	27.8 (1) / 128 (2)	33.5 (1) / 172 (2)	37.0 (1) / 178 (2)	39.2 (1) / 198 (2)	44.6 (1) / 245 (2)	47.3 (1) / 272 (2)	55.1 (1) / 232 (2)	58.6 (1) / 259 (2)	62.4 (1) / 305 (2)	64.9 (1) / 328 (2)	67.6 (1) / 354 (2)
	Water	volume		l	741	771	808	1,012	1,372	1,965					
Air heat exchanger	Type			High efficiency fin and tube type											
Compressor	Type			Asymmetric single screw compressor											
	Quantity			2											
Fan	Type			Direct propeller											
	Air flow rate	Nom.	l/s	50,368	60,441	70,515	80,588	95,253							
Sound power level (XS)	Cooling	Nom.	dB(A)	100	101	102	103								
Sound power level (XL)	Cooling	Nom.	dB(A)	96	97	98	99								
Sound pressure level (XS)	Cooling	Nom.	dB(A)	79	80	81	80								
Sound pressure level (XL)	Cooling	Nom.	dB(A)	76	77	77									
Operation range	Air side	Cooling	Min.~Max.	°CDB -20~45											
	Water side	Cooling	Min.~Max.	°CDB -8~25											
Refrigerant	Type/GWP			R-134a/1,430											
	Circuits	Quantity		2											
Refrigerant charge			kg/TCO <sub>2</sub> Eq	64.0/91.5	73.0/104.4	81.0/115.8	91.0/130.1	107.0/153.0	112.5/160.9	124.0/177.3					
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm				219.1mm				273mm			
Unit	Starting current	Max	A	605	619	658	924	971	1,030	1,073	1,086				
	Running current	Cooling	Nom.	A	404	430	467	515	568	628	636	701	720	773	825
	Running current	Max	A	476	510	561	605	672	731	811	875	929	982		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400											

(1) Cooling: entering evaporator water temp. 16°C; leaving evaporator water temp. 10°C; ambient air temp. 35°C; full load operation.  
 (2) Data is calculated at ambient air temperature 5°C, inlet water temperature 16°C.

# Air cooled screw chiller with free cooling, high efficiency, reduced sound

- › Free cooling chiller for space cooling and industrial processes
- › Stepless single-screw compressor
- › Greater energy savings and reduced CO<sub>2</sub> emissions during cold season
- › Wide operating range: NEW OPTION 187 (high evaporator leaving temperature up to 25°C)
- › MicroTech 4 controller with superior control logic and easy interface



EWAD-CFXS/XL/XR

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWAD-CFXR

Cooling Only				EWAD-CFXR	600	740	820	870	980	C10	C11	C12	C13	C14	C15
Cooling capacity	Nom.			kW	602 (1) / 374 (2)	739 (1) / 468 (2)	821 (1) / 539 (2)	866 (1) / 562 (2)	981 (1) / 644 (2)	1,034 (1) / 670 (2)	1,229 (1) / 825 (2)	1,302 (1) / 866 (2)	1,374 (1) / 889 (2)	1,424 (1) / 909 (2)	1,476 (1) / 929 (2)
Power input	Cooling	Nom.		kW	263 (1) / 46.6 (2)	278 (1) / 56.2 (2)	299 (1) / 58.5 (2)	334 (1) / 63.1 (2)	368 (1) / 68.5 (2)	412 (1) / 74.4 (2)	403 (1) / 80.0 (2)	450 (1) / 87.5 (2)	466 (1) / 93.4 (2)	511 (1) / 103 (2)	556 (1) / 109 (2)
Capacity control	Method				Stepless										
	Minimum capacity			%	12.5										
EER					2.29 (1) / 12.91 (2)	2.66 (1) / 13.17 (2)	2.75 (1) / 14.04 (2)	2.59 (1) / 13.71 (2)	2.67 (1) / 14.33 (2)	2.51 (1) / 13.89 (2)	3.05 (1) / 15.36 (2)	2.90 (1) / 14.87 (2)	2.95 (1) / 14.7 (2)	2.79 (1) / 13.85 (2)	2.66 (1) / 13.56 (2)
IPLV					4.09	4.15	4.16	4.20	4.10	4.08	4.42	4.37	4.42	4.28	
Dimensions	Unit	Height		mm	2,565										
		Width		mm	2,480										
		Depth		mm	6,300	7,200	8,100	9,000	10,800						
Weight	Unit			kg	8,050	8,620	9,190	10,450	10,710	12,190	12,830	12,910	12,960		
	Operation weight			kg	8,795	9,390	9,995	11,459	11,719	13,566	14,806	14,886	14,936		
Water heat exchanger	Type				Single pass shell & tube										
	Water flow rate	Cooling	Nom.	l/s	26.2 (1) / 26.2 (2)	32.1 (1) / 32.1 (2)	35.7 (1) / 35.7 (2)	37.6 (1) / 37.6 (2)	42.6 (1) / 42.6 (2)	44.9 (1) / 44.9 (2)	53.4 (1) / 53.4 (2)	56.6 (1) / 56.6 (2)	59.7 (1) / 59.7 (2)	61.9 (1) / 61.9 (2)	64.1 (1) / 64.1 (2)
	Water pressure drop	Cooling	Nom.	kPa	76 (1) / 115 (2)	97 (1) / 159 (2)	84 (1) / 167 (2)	93 (1) / 184 (2)	102 (1) / 225 (2)	113 (1) / 248 (2)	92 (1) / 219 (2)	103 (1) / 243 (2)	128 (1) / 282 (2)	137 (1) / 301 (2)	146 (1) / 321 (2)
	Water volume			l	741	771	808	1,012	1,372	1,965					
Air heat exchanger	Type				High efficiency fin and tube type										
Compressor	Type				Asymm single screw										
	Quantity				2										
Fan	Type				Direct propeller										
	Quantity				10	12	14	16	20						
	Air flow rate	Nom.		l/s	38,935	46,722	54,508	62,295	73,011						
	Speed			rpm	715										
Sound power level	Cooling	Nom.		dBA	92			94			95				
Sound pressure level	Cooling	Nom.		dBA	71	72			73	72			73		
Operation range	Air side	Cooling	Min.-Max.	°CDB	-20~-45										
	Water side	Cooling	Min.-Max.	°CDB	-8~-25										
Refrigerant	Type/GWP				R-134a/1,430										
	Circuits	Quantity			2										
Refrigerant charge	Per circuit			kg	64.0	73.0	81.0	91.0	107.0	112.5	124.0				
	Per circuit			TCO <sub>2</sub> Eq	91.5	104.4	115.8	130.1	153.0	160.9	177.3				
Piping connections	Evaporator water inlet/outlet (OD)				168.3mm			219.1mm			273mm				
Unit	Starting current	Max		A	598	611	648	912	960	1,016	1,059	1,072			
	Running current	Cooling	Nom.	A	411	439	473	526	580	647	645	717	738	800	862
	Max			A	462	493	542	585	649	708	783	847	901	954	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

(1) Cooling: entering evaporator water temp. 16°C; leaving evaporator water temp. 10°C; ambient air temp. 35°C; full load operation.  
 (2) Data is calculated at ambient air temperature 5°C, inlet water temperature 16°C.


EWA(H)(D)-TZB/C  
screw inverter chiller  
High efficiency in  
comfort and process  
cooling



Over 1,000 sites around the world with screw chillers installed is demonstrating that we will never stop developing the most advanced technology with highest quality level to offer the best chiller experience to our customers.

## EWA(H)(D)-TZB/C at a glance

- › Full inverter air cooled chiller
- › Capacity range from 190kW to 2000kW for series with R134a
- › Capacity range from 170kW to 1500kW for series with R1234ze
- › Daikin single screw compressor with integrated inverter
- › Best efficiency at full load and part load conditions

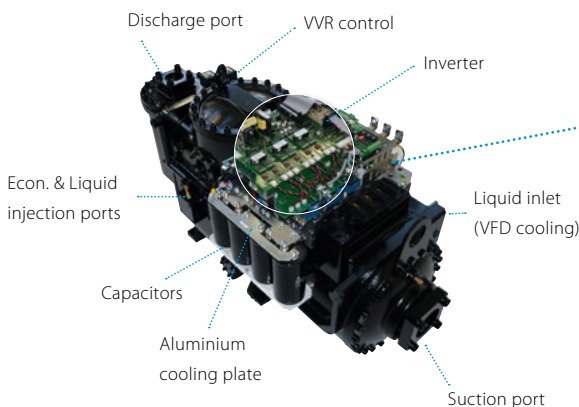

› Daikin EWAD-TZB  
Screw Inverter Chiller

Check on  
**YouTube**  
[www.youtube.com/  
DaikinEurope](http://www.youtube.com/DaikinEurope)



## Web-based chiller selection software

A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:

<http://tools.daikinapplied.eu/>



Model	Capacity-Cooling (kW)	COP	EER	IPR	Height
EWA(H)(D)-TZB/C	440.0	200.0	514.0	600.0	102.0
EWA(H)(D)-TZB/C	81.0	89.0	87.0	111	119
EWA(H)(D)-TZB/C	5.50	5.28	5.77	5.51	5.54
EWA(H)(D)-TZB/C	0.51	0.52	0.55	0.58	0.6
EWA(H)(D)-TZB/C	0.42	0.39	0.41	0.38	0.51
EWA(H)(D)-TZB/C	2000	2120	2100	2120	2120
EWA(H)(D)-TZB/C	1.80	1.80	1.80	1.80	1.80
EWA(H)(D)-TZB/C	1900	1900	1900	1900	1900
EWA(H)(D)-TZB/C	2000	2011	2147	2000	2010
EWA(H)(D)-TZB/C	21.0	24	24.2	20.9	20.4
EWA(H)(D)-TZB/C	88	63	55	80	18
EWA(H)(D)-TZB/C	25.0	28.4	28.0	24.5	24.7
EWA(H)(D)-TZB/C	31	38	35	34	23

## Why choose EWA(H)(D)-TZB/C?

### High efficiencies both at full load and part load:

- › Daikin compressor with in-built inverter for optimized efficiency
- › In-house developed software with dynamic condensing pressure management and innovative economizer control logic

### Rapid return on investment

- › Payback of three years, compared to a non-inverter unit for comfort cooling applications
- › Less than one year a for process cooling applications

### Perfect comfort level

- › Infinitely variable load regulation
- › Precise leaving water temperature control thanks to stepless regulation

### Compact design

- › More compact heat exchanger with superior efficiencies
- › Reduced electrical panel dimensions thanks to the inverter compressor mounted

### Lowest sound levels

- › Down to 87 dB(A) sound power at full load and even lower at part load thanks to fans and compressors variable speed
- › Quiet compressor thanks to special acoustic executions
- › Unique Daikin fans design with reduced noise impact and vibrations

### Unrivaled and proven reliability

- › Extensive testing of chillers and components in laboratories, Daikin factories and selected job sites - even at extreme working conditions
- › Reduced energy demand without compromising on reliability and performance

### Extensive option list

More than 60 different options are available to fit the EWA(H)(D)-TZB/C chiller to fit to your requirements:

- › Rapid restart after power failure
- › Variable speed water pumps to optimise the working efficiency
- › Total heat recovery: 80 to 85% of the total heat rejection of the chiller can be recovered
- › Partial heat recovery: 15 to 20% of the total heat rejection of the chiller can be recovered
- › Refrigerant leak detection



## Performance monitoring

With MT4, advanced algorithm implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This sensor-less algorithm calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard(\*), **no extra-hardware is required**.

(\* ) For TZ-B units an additional sub-cooling temperature sensor is required.



# Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSSB



EWAD-TZSLB

Cooling Only				EWAD-TZSSB/SLB																																									
		A Condition 35°C Pdc		kW		160	190	240	270	300	360	380	455	500	570	610	660	700	820	900	990	C10	C11																						
Space cooling		ηs,c		%		169.1	200.88	235.29	268.82	305.99	351.41	394.74	455.64	499.81	569.52	612.22	660.72	700.94	815.92	889.95	987.19	1,045.39	1,103.99																						
SEER						4.28	4.39	4.31	4.46	4.5	4.65	4.39	4.63	4.65	4.58	4.82	4.64	4.71	5.01	4.93	5.09	5.08	5.09																						
Cooling capacity	Nom.			kW		169.1	200.9	235.3	268.8	306	351.4	394.7	455.6	499.8	569.5	612.2	660.7	700.9	816	890	987	1,045	1,104																						
Power input	Cooling	Nom.		kW		56.48	69.9	82.99	89.94	108.6	118	139.4	163.8	174.6	198.1	217.6	239	249.1	257.9	296.1	321.3	346.4	366.2																						
Capacity control	Minimum capacity			%		37	31	34	29	25	24	16	17	16	14	13	12				10																								
EER						2.995	2.874	2.835	2.989	2.817	2.954	2.832	2.783	2.862	2.876	2.813	2.764	2.813	3.164	3.005	3.072	3.017	3.015																						
ESEER						4.37	4.46	4.3	4.4	4.42	4.5	4.46	4.44	4.49	4.54	4.59	4.63	4.7	4.43		4.44		4.51																						
IPLV						5.3	5.27	5.04	5.19	5.37	5.53	5.34	5.3	5.46	5.64	5.62	5.7	5.29	5.26	5.25	5.26	5.26	5.27																						
Dimensions	Unit	Height	mm		2,540																																								
		Width	mm		2,282																																								
		Depth	mm		2,330			3,230			4,130			5,030			5,887			6,786		6,877		7,787		8,687		9,587																	
Weight (SSB)	Unit	kg		2,066	2,091	2,149	2,375	2,422	2,771	4,044	4,060	4,317	4,603	4,780	4,804	5,074	6,282	6,382	6,777	7,132	7,410																								
		Operation weight		2,086	2,117	2,187	2,401	2,460	2,821	4,202	4,224	4,475	4,761	5,050	5,059	5,329	6,532	6,632	7,027	7,382	7,660																								
Weight (SLB)	Unit	kg		2,081	2,106	2,164	2,390	2,437	2,786	4,074	4,090	4,347	4,633	4,810	4,834	5,104	6,282	6,382	6,777	7,132	7,410																								
		Operation weight		2,101	2,132	2,202	2,416	2,475	2,836	4,232	4,254	4,505	4,791	5,080	5,089	5,359	6,532	6,632	7,027	7,382	7,660																								
Water heat exchanger	Type			Plate heat exchanger									Shell and tube																																
	Water volume	l		2025	261	37.35	261	37.35	49.5	158	164	158	270	255	283		485	453																											
	Water flow rate	Cooling	Nom.	l/s		8.1	9.6	11.2	12.9	14.6	16.8	18.9	21.8	23.9	27.3	29.3	31.6	33.5	39.1	42.6	47.2	50	52.8																						
	Water	Cooling	Nom.	kPa		25	19.3	15.4	32.6	25.2		25.9	32.4	44	55.7	38.8	32.3	36	52.6	36.9	42.2	46.6	37.3																						
Air heat exchanger	Type			Microchannel																																									
Compressor	Type			Driven vapour compression																																									
	Quantity			1								2																																	
Fan	Type			Direct propeller																																									
	Quantity			4				6				8				10				12				14				16		18		20													
	Air flow rate	Nom.		l/s		15,109				22,664				30,219				37,774				45,328				52,883				69,177				79,060		88,942		98,825							
				rpm		700																																							
Sound power level (SSB)	Cooling	Nom.		dBA		96				97				98				99				100				101				102				105				102				103			
Sound power level (SLB)	Cooling	Nom.		dBA		90				91				92				93				94				95				96				97				99				100			
Sound pressure level (SSB)	Cooling	Nom.		dBA		77				78				79				80				82				84				81															
Sound pressure level (SLB)	Cooling	Nom.		dBA		71				72				73				74				75				76				77				78											
Operation range	Air side	Cooling	Min.~Max.		°CDB		-18 ~50																																						
	Water side	Cooling	Min.~Max.		°CDB		-8 ~18																																						
Refrigerant	Type/GWP			R-134a/1,430																																									
	Charge	kg		27	29	33	38	41	52	58	59	68	75	77	83	90	91	104	117	130																									
	Circuits	Quantity		1								2																																	
Refrigerant charge	Per circuit	TCO2eq		38.6	41.5	47.2	54.3	58.6	74.4	41.5	42.2	48.6	53.6	55.1	59.3	64.4	65.1	74.4	83.7	93.0																									
Piping connections	Evaporator water inlet/outlet (OD)			3"				4"				5"				6"				168.3 mm				219.1mm																					
Unit	Running current	Cooling	Nom.		A		102	123	188	177	188	200	246	372	366	361	377	396	414	429	501	528	563	597																					
		Max	A		130	149	160	187	220	246	298	320	350	374	439	466	486	537	599	652	708	768																							
Power supply	Phase/Frequency/Voltage			Hz/V 3~/50/400																																									

performances according to CSS software 10.27



# Air cooled screw inverter chiller, standard efficiency, reduced sound

- › Optimized energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSRB

Cooling Only				EWAD-TZSRB																																												
				160	190	240	270	300	360	380	455	500	570	610	660	700	820	900	990	C10	C11																											
Space cooling	A Condition 35°C Pdc ηs,c	kW		169.1	200.88	235.29	268.82	305.99	351.41	394.01	454.57	499.14	568.6	610.43	658.99	699.87	799.95	894.94	956.14	1,013.27	1,067.02																											
		%		168.2	172.6	169.4	175.4	177	183	172.2	170.6	174.2	179.4	188.6	181.8	184.6	215	213.4	213.8	216.2	217.8																											
SEER				4.28	4.39	4.31	4.46	4.5	4.65	4.38	4.63	4.64	4.56	4.79	4.62	4.69	5.45	5.41	5.42	5.48	5.52																											
Cooling capacity	Nom.	kW		169.1	200.9	235.3	268.8	306	351.4	394	454.6	499.1	568.6	610.4	659	699.9	800	895	956	1,013	1,067																											
Power input	Cooling Nom.	kW		56.48	69.9	82.99	89.94	108.6	118	140.2	164.8	175.4	199.1	218.4	240.3	250.3	247.8	294.1	316	335.6	358.9																											
Capacity control	Minimum capacity	%		37	31	34	29	25	24	16	17	16	14	13	12			10																														
EER				2.995	2.874	2.835	2.989	2.817	2.954	2.81	2.759	2.846	2.856	2.795	2.742	2.796	3.229	3.043	3.016	3.018	2.973																											
ESEER				4.37	4.46	4.3	4.4	4.42	4.5	4.44	4.43	4.47	4.53	4.61	4.6	4.68	4.8	4.85	4.83	4.98																												
IPLV				5.3	5.27	5.04	5.19	5.37	5.53	5.3	5.26	5.43	5.6	5.61	5.6	5.67	5.92	5.74	5.77	5.75	5.86																											
Dimensions	Unit	Height	mm	2,540																																												
		Width	mm	2,282																																												
		Length	mm	2,330			3,230			4,130			5,030			5,887			6,786		7,787		8,687		9,587		10,488																					
Weight	Unit	kg		2,166	2,191	2,249	2,475	2,522	2,871	4,244	4,260	4,517	4,803	4,980	5,004	5,274	6,997	7,097	7,452	7,730	8,023																											
		Operation weight		kg	2,186	2,217	2,287	2,501	2,560	2,921	4,402	4,424	4,675	4,961	5,250	5,259	5,529	7,247	7,347	7,702	7,980	8,273																										
Water heat exchanger	Type			Plate heat exchanger								Shell and tube																																				
		Water volume		l	20.25	26.1	37.35	26.1	37.35	49.5	158	164	158	270	255	283			485		453																											
		Water flow rate	Cooling Nom.	l/s	8.1	9.6	11.2	12.9	14.6	16.8	18.8	21.7	23.9	27.2	29.2	31.5	33.5	38.3	42.8	45.7	48.5	51																										
		Water pressure drop	Cooling Nom.	kPa	25	19.3	15.4	32.6	25.2	25.9	25.8	32.2	43.9	55.5	38.6	32.2	35.9	52.1	36.3	41	45.6	36.3																										
Air heat exchanger	Type			Microchannel																																												
Compressor	Type			Driven vapour compression																																												
	Quantity			1								2																																				
Fan	Type			Direct propeller																																												
		Quantity			4				6				8				10				12				14				16				18				20				22							
		Air flow rate	Nom.	l/s	15,109				22,664				30,219				29,650				36,920				44,475				51,745				59,299				66,570				74,124				81,394			
		Speed	rpm	700																																												
Sound power level	Cooling Nom.	dBA		86	87	88	90				91	92	94				95																															
Sound pressure level	Cooling Nom.	dBA		67	68				69	70				71	73																																	
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~50								-18~45																																		
	Water side	Cooling	Min.~Max.	°CDB		-8~18								-15~20																																		
Refrigerant	Type/GWP			R-134a/1,430																																												
	Charge	kg		27	29	33	38	41	52	58	59	68	75	77	83	90	104	117	130	143																												
	Circuits	Quantity	1								2																																					
Refrigerant charge	Per circuit	TCO2Eq		38.6	41.5	47.2	54.3	58.6	74.4	41.5	42.2	48.6	53.6	55.1	59.3	64.4	74.4	83.7	93.0	102.2																												
Piping connections	Evaporator water inlet/outlet (OD)			3"				4"				5"				6"				168.3 mm				219.1mm																								
Unit	Running current	Cooling	Nom.	A	102	123	188	177	188	200	247	374	368	363	378	398	416	422	496	530	561	599																										
		Max	A	130	149	160	187	220	246	298	320	350	374	439	466	486	523	585	635	688	745																											
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																																												

performances according to CSS software 10.27



# Air cooled screw inverter chiller, high efficiency, standard/low sound

- › High energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation thanks to inverter driven fans to improve part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXS



EWAD-TZSLB

Cooling Only		EWAD-TZXS/SLB																	
		190	220	240	290	320	360	420	450	540	570	610	660	680	770	850	910	C10	C11
Space cooling (XSB)	A Condition 35°C Pdc	kW																	
	ηs,c	%																	
Space cooling (XLB)	A Condition 35°C Pdc	kW																	
	ηs,c	%																	
SEER		4.95 5.04 4.96 5.15 5.14 4.96 5.03 5.07 5.1 5.04 5.17 5.23 5.21 5.79 5.74 5.91 6.15 6																	
Cooling capacity	Nom.	kW																	
Power input	Cooling Nom.	kW																	
Capacity control	Minimum capacity	%																	
EER		3.46 3.343 3.304 3.3 3.127 3.304 3.156 3.261 3.236 3.111 3.127 3.164 3.085 3.374 3.195 3.306 3.3 3.265																	
ESEER		5.11 5.06 4.99 5.09 5.13 5.14 5.09 5 5.07 5.11 5.15 5.09 5.13 5.15 5.22																	
IPLV		6.26 6.15 6.19 6.17 6.4 6.3 6.22 6.29 6.31 6.25 6.21 6.26 6.08 6.19 6.29 6.24																	
Dimensions	Unit																		
	Height	mm																	
	Width	mm																	
Weight (XSB)	Unit	kg																	
	Operation weight	kg																	
	Unit	kg																	
Water heat exchanger	Type	Plate heat exchanger																	
	Water volume	l																	
	Water flow rate Cooling Nom.	l/s																	
Air heat exchanger	Type	Microchannel																	
	Compressor	Driven vapour compression																	
	Fan	Direct propeller																	
Sound power level (XSB)	Cooling Nom.	dBa																	
	Cooling Nom.	dBa																	
	Cooling Nom.	dBa																	
Operation range	Air side Cooling Min.-Max.	°CDB																	
	Water side Cooling Min.-Max.	°CDB																	
	Refrigerant	R-134a/1,430 R-134a/- R-134a/1,430																	
Refrigerant charge	Per circuit	kg																	
	Evaporator water inlet/outlet (OD)	mm																	
	Unit	Hz/V																	

performances according to CSS software 10.27





# Air cooled screw inverter chiller, high efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation thanks to inverter driven fans to improve part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXR

Cooling Only		EWAD-TZXR																		
		190	220	240	290	320	360	420	450	540	570	610	660	680	770	850	910	C10	C11	
Space cooling	A Condition 35°C Pdc	kW																		
	ηs,c	%																		
SEER		4.95	5.04	4.96	5.15	5.14	4.94	5.03	5.05	5.08	5.03	5.14	5.2	5.19	5.82	5.81	5.91	6.18	6.02	
Cooling capacity	Nom.	kW																		
Power input	Cooling Nom.	kW																		
Capacity control	Minimum capacity	%																		
EER		3.46																		
ESEER		5.11																		
IPLV		6.26																		
Dimensions	Unit																			
	Height	mm																		
	Width	mm																		
Weight	Unit	kg																		
	Operation weight	kg																		
	Water heat exchanger	Type	Plate heat exchanger																	
Water heat exchanger	Water volume	l																		
	Water flow rate	Cooling	Nom.																	
	Water pressure drop	Cooling	Nom.																	
Air heat exchanger	Type	Microchannel																		
Compressor	Type	Driven vapour compression																		
Fan	Quantity	1																		
	Type	Direct propeller																		
	Quantity	6																		
Sound power level	Cooling	Nom.																		
	Sound pressure level	Cooling	Nom.																	
	Operation range	Air side	Cooling	Min.~Max.																
Refrigerant	Type/GWP	R-134a/1,430																		
	Charge	kg																		
	Circuits	Quantity	1																	
Refrigerant charge	Per circuit	TCO2Eq																		
Piping connections	Evaporator water inlet/outlet (OD)	3"																		
Unit	Running current	Cooling	Nom.																	
	Power supply	Phase/Frequency/Voltage	Hz/V																	

performances according to CSS software 10.27



# Air cooled screw inverter chiller, premium efficiency, standard/low sound

- › Premium energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation with EC fans for even higher part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPSB



EWAD-TZPLB

Cooling Only				EWAD-TZPSB/PLB																				
				190	220	240	290	300	350	420	495	550	620	720	820	950								
Space cooling	A Condition 35°C Pdc			kW			183.62	216.12	244.42	281.93	323.37	378.96	437.31	501.15	543.03	620	717	832.86	949.85					
	ηs,c			%			204.6	210.2	208.6	209	217	207	211.4	221.8	219	241.4	245.8	249	249.4					
SEER							5.19	5.33	5.29	5.3	5.5	5.25	5.36	5.62	5.55	6.11	6.22	6.3	6.31					
Cooling capacity	Nom.			kW			183.6	216.1	244.4	281.9	323.4	379	437.3	501.2	543	620	717	833	950					
Power input	Cooling	Nom.		kW			50.48	60.72	68.74	83.43	95.89	104.6	124.9	139.1	151.4	178.8	182.3	220.4	252.5					
Capacity control	Minimum capacity			%			34	29	34	29	27	19	20	17	10									
EER							3.637	3.559	3.555	3.379	3.372	3.623	3.502	3.603	3.586	3.468	3.933	3.78	3.763					
ESEER							5.54	5.51	5.42	5.4	5.35	5.48	5.45	5.5	5.42	5.59	5.54	5.55						
IPLV							6.49	6.35	6.41	6.35	6.21	6.52	6.58	6.55	6.51	6.47	6.73	6.6	6.64					
Dimensions	Unit	Height	mm			2,540																		
		Width	mm			2,282																		
		Length	mm			4,130		5,030	5,887	6,786	7,684	8,579	9,480	9,587	10,488	11,387								
Weight (PSB)	Unit			kg			2,758	2,769	2,770	3,020	4,735	5,069	5,077	6,527	6,555	7,650	7,943	8,240						
		Operation weight		kg			2,808	2,819	2,820	3,070	4,990	5,324	5,332	6,777	6,805	7,900	8,193	8,490						
Weight (PLB)	Unit			kg			2,773	2,784	2,785	3,035	4,765	5,099	5,107	6,527	6,555	7,650	7,943	8,240						
		Operation weight		kg			2,823	2,834	2,835	3,085	5,020	5,354	5,362	6,777	6,805	7,900	8,193	8,490						
Water heat exchanger	Type			Plate heat exchanger												Shell and tube								
	Water volume			l			49.5						255			307			485			453		
	Water flow rate	Cooling	Nom.	l/s			8.8	10.3	11.7	13.5	15.5	18.1	20.9	24	26	29.6	34.3	39.8	45.4					
	Water	Cooling	Nom.	kPa			10.6	11	13.4	17.1	21.5	20.4	26.5	33.3	19.8	25	24.2	31.7	29					
Air heat exchanger	Type			Microchannel																				
Compressor	Type			Driven vapour compression																				
	Quantity			1					2															
Fan	Type			Direct propeller																				
	Quantity			8				10	12	14	16	18	20	22	24									
	Air flow rate Nom.			l/s			29,610	37,013	44,415	51,818	59,220	66,623	74,025	81,428	88,830									
	Speed			rpm			700																	
Sound power level (PSB)	Cooling	Nom.		dBA			97			98	99			100	101									
Sound power level (PLB)	Cooling	Nom.		dBA			91	92	91	92	94			97										
Sound pressure level (PSB)	Cooling	Nom.		dBA			77						78	77	78	79								
Sound pressure level (PLB)	Cooling	Nom.		dBA			71	72	71	72	73	72	73	75										
Operation range	Air side	Cooling	Min.-Max.	°CDB			-18~55										-18~53							
	Water side	Cooling	Min.-Max.	°CDB			-8~18										-15~20							
Refrigerant	Type/GWP			R-134a/1,430																				
	Charge			kg			49	50	51	58	77	86	94	105	114	130	143	156						
	Circuits			Quantity			1					2												
Refrigerant charge	Per circuit			tCO2Eq			70.1	71.5	72.9	82.9	55.1	61.5	67.2	75.1	81.5	93.0	102.2	111.5						
Piping connections	Evaporator water inlet/outlet (OD)			3"			4"				6"				168.3 mm			219.1mm						
Unit	Running current	Cooling	Nom.		A			101	104	172	177	208	211	346	258	298	316	375	424					
		Max		A			126	144	162	188	218	246	285	324	352	436	437	512	577					
Power supply	Phase/Frequency/Voltage			Hz/V			3~50/400																	

performances according to CSS software 10.27



# Air cooled screw inverter chiller, premium efficiency, reduced sound

- › Premium energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation with EC fans for even higher part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPRB


Cooling Only				EWAD-TZPRB	190	220	240	290	300	350	420	495	550	620	720	820	950
Space cooling	A Condition 35°C Pdc			kW	187.3	218.24	246.75	279.23	317.21	382.29	436.87	505.48	543.03	620.04	717	832.86	949.86
	ηs,c			%	208.6	212.2	210.6	207	212.2	208.2	210.2	221	218.2	219.8	248.6	249.4	251
SEER					5.29	5.38	5.34	5.25	5.38	5.28	5.33	5.6	5.53	5.57	6.29	6.31	6.35
Cooling capacity	Nom.			kW	187.3	218.2	246.8	279.2	317.2	382.3	436.9	505.5	543	620	717	833	950
Power input	Cooling	Nom.		kW	50.48	60.72	68.74	83.42	95.88	105.1	125.3	139.7	151.3	178.5	182.2	220.2	252.4
Capacity control	Minimum capacity			%	34	29	34	29	27	19	20	17	10				
EER					3.71	3.594	3.59	3.347	3.308	3.637	3.486	3.618	3.59	3.473	3.935	3.783	3.764
ESEER					5.55	5.52	5.27	5.16	5.2	5.32	5.21	5.38	5.5	5.42	5.59	5.54	5.55
IPLV					6.49	6.35	6.23	6.07	6.04	6.3	6.27	6.47	6.53	6.47	6.73	6.6	6.64
Dimensions	Unit	Height		mm	2,540												
		Width		mm	2,282												
		Length		mm	4,130			5,030		5,887	6,786	7,684	8,579	9,480	9,587	10,488	11,387
Weight	Unit			kg	2,858	2,869	2,870	3,120	4,935	5,269	5,277	6,677	6,705	7,970	8,263	8,560	
	Operation weight			kg	2,908	2,919	2,920	3,170	5,190	5,524	5,532	6,927	6,955	8,220	8,513	8,810	
Water heat exchanger	Type			Plate heat exchanger													
	Water volume			l	49.5			255			307			485		453	
	Water flow rate	Cooling	Nom.	l/s	9	10.4	11.8	13.3	15.2	18.3	20.9	24.2	26	29.6	34.3	39.8	45.4
	Water pressure drop	Cooling	Nom.	kPa	10.6	11	13.4	17.1	21.5	20.4	26.4	33.2	19.8	24.9	24.2	31.7	28.9
Air heat exchanger	Type			Microchannel													
Compressor	Type			Driven vapour compression													
	Quantity			1				2									
Fan	Type			Direct propeller													
	Quantity			8				10	12	14	16	18	20		22	24	
	Air flow rate Nom.			l/s	29,610				37,013	43,369	50,423	57,826	64,879	72,282	79,336	86,738	
	Speed			rpm	700												
Sound power level	Cooling	Nom.		dB(A)	87	88	87	88		89	90		94	95			
	Sound pressure level	Cooling	Nom.		dB(A)	67	68	67	68			69	73				
Operation range	Air side	Cooling	Min.-Max.	°CDB	-18~55												
	Water side	Cooling	Min.-Max.	°CDB	-8~18												
Refrigerant	Type/GWP			R-134a/1,430													
	Charge			kg	49	50	51	58	77	86	94	105	114	130	143	156	
	Circuits	Quantity		1				2									
Refrigerant charge	Per circuit			TCO2Eq	70.1	71.5	72.9	82.9	55.1	61.5	67.2	75.1	81.5	93.0	102.2	111.5	
Piping connections	Evaporator water inlet/outlet (OD)			3"				4"				6"				219.1mm	
Unit	Running current	Cooling	Nom.	A	101	104	172	177		209	212	347	259	300	317	377	426
		Max		A	126	144	162	188	218	246	285	324	352	436	437	512	577
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400												

performances according to CSS software 10.27



# Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils

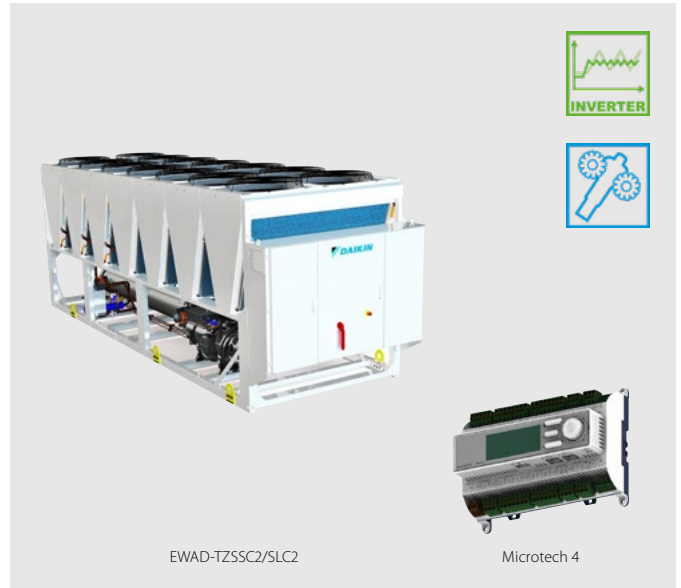

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSSC2




EWAD-TZSLC2

Cooling Only				EWAD-TZSSC2/SLC2								
				H11	H12	H13	C15	C16	H17	H18	H19	
Space cooling	A Condition 35°C Pdc		kW	1,189	1,259	1,355	1,508	1,644	1,766	1,875	1,965	
	ηs,c		%	184.5	182.4	182.9	190.1	191.8	191.4	190.1	184.2	
SEER				4.69	4.64	4.65	4.83	4.87	4.86	4.83	4.68	
Cooling capacity	Nom.		kW	1,189	1,259	1,355	1,508	1,644	1,766	1,875	1,965	
Power input	Cooling	Nom.	kW	380.9	413.4	438.6	485	532.8	581.8	636.4	709.3	
Capacity control	Method			Variable								
	Minimum capacity		%	12.5								
EER				3.12	3.05	3.09	3.11	3.09	3.04	2.95	2.77	
IPLV				4.85	4.8	4.78	5.14	5.11	5.07	5.04	4.99	
Dimensions	Unit	Height	mm	2,540								
		Width	mm	2,282								
		Length	mm	10,510	11,404			12,302	13,202	14,102		
Weight	Unit		kg	9,322	10,112		10,716	11,134	11,564	12,037		
		Operation weight	kg	9,879	11,123	11,727	12,145	12,575	13,048			
Water heat exchanger	Type			Shell and tube								
	Water volume		l	557				1,011				
	Water pressure drop	Cooling	Nom.	kPa	57.1	63.3	40.5	49.1	57.4	65.2	72.7	79
Air heat exchanger	Type			Microchannel								
Compressor	Type			Inverter driven single screw compressor								
	Quantity			2								
Fan	Type			Direct propeller								
	Quantity			22	24		26	28	30			
	Air flow rate	Nom.	l/s	112,259	122,464			132,670	142,876	153,081		
	Speed		rpm	900								
Sound power level (SSC2)	Cooling	Nom.	dBA	100			101		102	103		
Sound power level (SLC2)	Cooling	Nom.	dBA	102	103	104		105		106	107	
Sound pressure level (SSC2)	Cooling	Nom.	dBA	77	78			79		80		
Sound pressure level (SLC2)	Cooling	Nom.	dBA	80	81	82	81	82	83	84		
Refrigerant	Type/GWP			R-134a/1,430								
	Charge		kg	175	200		220	250	270			
	Circuits	Quantity		2								
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm				273mm				
Unit	Running current	Cooling	Nom.	A	646.5	691.1	733.0	813.9	884.0	962.8	1,044	1,149
		Max		A	913	969	1,027	1,165	1,205	1,301	1,398	1,487
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400								

performances according to CSS software 10.27

# Air cooled screw inverter chiller, standard efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils

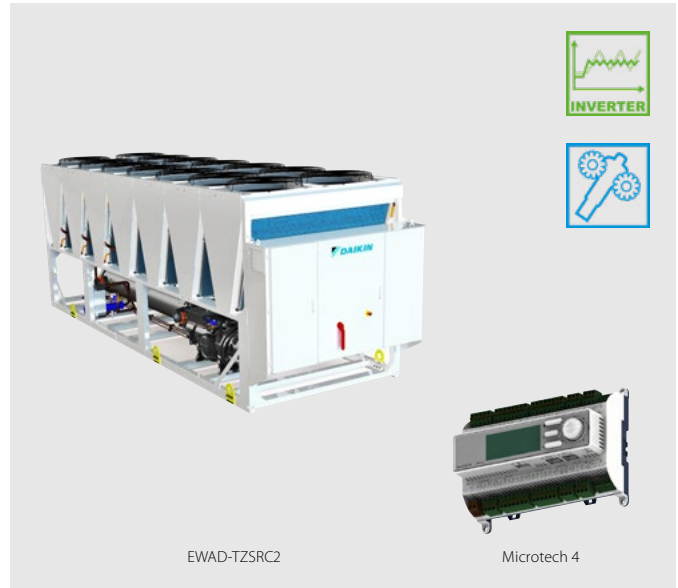

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSRC2


Cooling Only			EWAD-TZSRC2	H11	H12	H13	C15	C16	H17	H18	H19	
Space cooling	A Condition 35°C Pdc		kW	1,164	1,229	1,323	1,463	1,595	1,712	1,812	1,876	
	ηs,c		%	206.8	201.6	203.1	204.1	205.3	205.0		201.4	
SEER				5.24	5.12	5.15	5.18	5.21	5.20		5.11	
Cooling capacity	Nom.		kW	1,164	1,229	1,323	1,463	1,595	1,712	1,812	1,876	
Power input	Cooling	Nom.	kW	384.6	423.1	446	513.9	564.5	611.2	663.5	741.2	
Capacity control	Method			Variable								
	Minimum capacity		%	12.5								
EER				3.03	2.91	2.97	2.85	2.83	2.80	2.73	2.53	
IPLV				5.43	5.29	5.34	5.53		5.5	5.51	5.36	
Dimensions	Unit	Height	mm	2,540								
		Width	mm	2,282								
		Length	mm	10,510		11,404		12,302		13,202	14,102	
Weight	Unit		kg	9,322		10,112	10,716	11,134	11,564	12,037		
	Operation weight		kg	9,879		11,123	11,727	12,145	12,575	13,048		
Water heat exchanger	Type			Shell and tube								
	Water volume		l	557		1,011						
	Water pressure drop	Cooling	Nom.	kPa	54	60.6	38.8	46.5	54.3	61.6	68.3	72.7
Air heat exchanger	Type			Microchannel								
Compressor	Type			Inverter driven single screw compressor								
	Quantity			2								
Fan	Type			Direct propeller								
	Quantity			22		24		26		28	30	
	Air flow rate	Nom.	l/s	81,518		89,145		96,375		104,002	111,232	
	Speed		rpm	700								
Sound power level	Cooling	Nom.	dBA	93		94		95		96		
Sound pressure level	Cooling	Nom.	dBA	70	71				72		73	
Refrigerant	Type/GWP			R-134a/1,430								
	Charge		kg	175		200		220	250	270		
	Circuits	Quantity		2								
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm				273mm				
Unit	Running current	Cooling	Nom.	A	659.2	708.5	748.1	853.7	922.8	1,000	1,080	1,194
		Max		A	913	969	1,027	1,165	1,205	1,301	1,398	1,487
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400								

performances according to CSS software 10.27



# Air cooled screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils

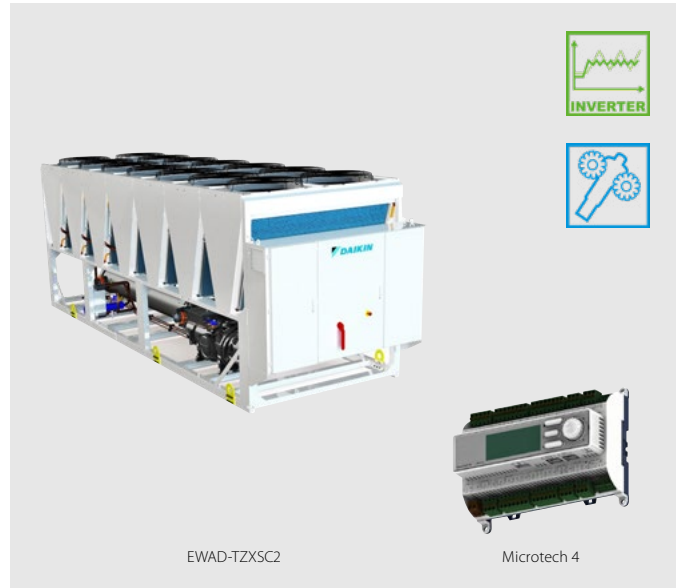

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXSC2

Cooling Only			EWAD-TZXSC2	C11	C12	H12	C14	C15	H16	H17	
Space cooling	A Condition 35°C Pdc		kW	1,124.00	1,280	1,206	1,399	1,539	1,667	1,780	
	ηs,c		%	211.5	210.8	211.1	211.9	212.6	214.2	212.6	
SEER				5.36	5.35		5.37	5.39	5.43	5.39	
Cooling capacity	Nom.		kW	1,124	1,280	1,206	1,399	1,539	1,667	1,780	
Power input	Cooling	Nom.	kW	354	401.6	375.9	431.7	478.8	524.7	575.4	
Capacity control	Method			Variable							
	Minimum capacity		%	12.5							
EER				3.17	3.19	3.21	3.24	3.22	3.18	3.09	
IPLV				5.54		5.58	5.79	5.7	5.66	5.65	
Dimensions	Unit	Height	mm	2,540							
		Width	mm	2,282							
		Length	mm	10,510	12,302	11,402	12,302	13,202	14,104		
Weight	Unit		kg	9,322	10,515	10,112	10,716	11,134	11,564	12,037	
	Operation weight		kg	9,879	11,526	11,123	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube							
	Water volume		l	557	1,011						
	Water pressure drop	Cooling	Nom.	kPa	51.6	36.6	32.8	42.9	50.9	58.8	66.1
Air heat exchanger	Type			Microchannel							
Compressor	Type			Inverter driven single screw compressor							
	Quantity			2							
Fan	Type			Direct propeller							
	Quantity			22	26	24	26	28	30		
	Air flow rate	Nom.	l/s	83,897	99,151	91,524	122,464	132,670	142,876	153,081	
	Speed		rpm	700							
Sound power level	Cooling	Nom.	dB(A)	95	97	96	101	102			
	Sound pressure level	Cooling	Nom.	dB(A)	73	74	73	78	79		
Refrigerant	Type/GWP			R-134a/1,430							
	Charge		kg	175	220	200	220	250	270		
	Circuits	Quantity		2							
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm			273mm				
Unit	Starting current	Max	A	0.0							
	Running current	Cooling	Nom.	A	608.8	686.1	647.1	735.8	806.6	874.7	957.5
		Max	A	918	994	939	1,085	1,124	1,218	1,313	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400							

performances according to CSS software 10.27

# Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Compact design for small footprint and minimized installation space

Cooling Only				EWAH-TZSSB/SLB													
				170	200	240	290	330	390	420	490	530	600				
Space cooling	A Condition 35°C Pdc	kW		170.68	199.73	240.35	293.87	326.19	393.7	421.46	490.52	528.28	598.77				
	ηs,c	%		166.8	169.44	179.68	186.68	180.56	181.08	180.56	187.04	186.72	190.68				
SEER				4.245	4.311	4.567	4.742	4.589	4.602	4.589	4.751	4.743	4.842				
Cooling capacity	Nom.	kW		171	200	240	294	326	394	421	491	528	599				
Power input	Cooling	kW		55.4	69.4	83.3	97.5	115	131	146	170	188	212				
	Capacity control	Method	Variable														
EER	Minimum capacity	%		33.4	28.6	23.6	18.7		14.3	13.4	11.8	11.2	10				
				3.08	2.88	2.89	3.02	2.82	2.99	2.88		2.8	2.82				
IPLV				5.19	5.22	5.5	5.73	5.52	5.18	5.16	5.4	5.31	5.41				
Dimensions	Unit	Height	mm	2,540													
		Width	mm	2,282													
		Length	mm	2,330			3,230			5,030		5,887		6,009			
Weight	Unit	kg		2,160.6	2,170.6	2,449.4	2,559.4		4,170.2		4,634		5,619				
	Operation weight	kg		2,186.7	2,207.95	2,486.75	2,608.9		4,329.2	4,323.2	4,890	4,867	5,867				
Water heat exchanger	Type	Plate heat exchanger															
	Water volume	l		26			37			50		159		153	256	233	248
	Water flow rate	Cooling	Nom.	l/s		8.2	9.5	11.5	14	15.6	18.8	20.1	23.4	25.2	28.6		
	Water pressure drop	Cooling	Nom.	kPa		15.1	12.3	17.1	18.2	22	24.4	31.6	33.8	31.1	27.8		
Air heat exchanger	Type	Microchannel															
	Compressor	Type	Driven vapour compression														
Fan	Quantity				1				2								
	Type	Direct propeller															
	Quantity				4			6			10		12				
Sound power level (SSB)	Cooling	Nom.	dB(A)		97.07	97.53	100.19	101.14		100.59	101.02	103.19	105.6	104.14			
	Sound power level (SLB)				91.73	92.13	94.69	96.44		95.32	97.69		99.9	99.44			
Sound pressure level (SSB)	Cooling	Nom.	dB(A)		78.10	78.60	80.7	81.70		80.2	80.60	82.40	84.8	83.40			
Sound pressure level (SLB)					72.78	73.17	75.2	76.96		74.94	75.31	76.92	79.12	78.67			
Operation range	Air side	Cooling	Min.~Max.	°CDB	-18~50												
	Water side	Cooling	Min.~Max.	°CDB	-8~18												
Refrigerant	Type/GWP	R-1234(z)e/7															
	Charge	kg		27.6			41.4			64.2		78		102			
	Circuits	Quantity	1										2				
Piping connections	Evaporator water inlet/outlet (OD)				88.9mm			114.3mm			139.7mm		168.3mm				
	Unit	Running current	Cooling	Nom.	A		93.0	114.0	137.0	158.0	191.0	217.0	243.0	279.0	307.0	343.0	
Power supply	Phase/Frequency/Voltage			A		132.0	156.0	217.0	236.0	272.0	312.0	348.0	434.0	500.0	522.0		
							3~/50/400										

# Air cooled screw inverter chiller, standard efficiency, reduced sound



Cooling Only				EWAH-TZSRB											
				170	200	240	290	330	390	420	490	530	600		
Space cooling	A Condition 35°C	Pdc	kW	170.68	199.73	240.35	293.87	326.19	393.39	421.08	489.94	527.57	597.68		
	ηs,c		%	166.8	169.44	179.68	186.68	180.56	180.04	181.36	187.4	185.56	189.6		
SEER				4.245	4.311	4.567	4.742	4.589	4.576	4.609	4.76	4.714	4.815		
Cooling capacity	Nom.		kW	171	200	240	294	326	393	421	490	528	598		
Power input	Cooling	Nom.	kW	55.4	69.4	83.3	97.5	115	132	146	171	189	214		
Capacity control	Method			Variable											
	Minimum capacity		%	33.4	28.6	23.6	18.7		14.3	13.4	11.8	11.2	10		
EER				3.08	2.88	2.89	3.02	2.82	2.98	2.87	2.86	2.78	2.79		
IPLV				5.19	5.22	5.5	5.73	5.52	5.13	5.22	5.38	5.29	5.38		
Dimensions	Unit	Height	mm	2,540											
		Width	mm	2,282											
		Length	mm	2,330		3,230			5,030			5,887		6,009	
Weight	Unit		kg	2,260.6	2,270.6	2,549.4	2,719.4		4,370.2		4,834		5,939		
	Operation weight		kg	2,286.7	2,307.95	2,586.75	2,768.9		4,592	4,523	5,090	5,067	6,187		
Water heat exchanger	Type			Plate heat exchanger					Shell and tube						
	Water volume		l	26	37			50	159	153	256	233	248		
	Water flow rate	Cooling Nom.	l/s	8.2	9.5	11.5	14	15.6	18.8	20.1	23.4	25.2	28.6		
	Water pressure drop	Cooling Nom.	kPa	15.1	12.3	17.1	18.2	22	24.4	31.6	33.7	31	27.7		
Air heat exchanger	Type			Microchannel											
Compressor	Type			Driven vapour compression											
	Quantity			1					2						
Fan	Type			Direct propeller											
	Quantity			4		6			10		12				
	Air flow rate	Nom.	l/s	17,448		26,172			42,600		51,324				
	Speed		rpm	760											
Sound power level	Cooling	Nom.	dBA	87.67	87.93	90.25	92.27		91.42	91.65	93.25	94.9	95.27		
Sound pressure level	Cooling	Nom.	dBA	68.70	69.00	70.80	72.80		71.00	71.30	72.50	74.10	74.5		
Operation range	Air side	Cooling	Min.~Max.	-18~50											
	Water side	Cooling	Min.~Max.	-8~18											
Refrigerant	Type/GWP			R-1234(z)/7											
	Charge		kg	27.6		41.4			64.2		78		102		
	Circuits	Quantity		1					2						
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm			114.3mm			139.7mm		168.3mm			
Unit	Running	Cooling	Nom.	93.0	114.0	137.0	158.0	191.0	218.0	244.0	281.0	309.0	345.0		
	current	Max	A	132.0	156.0	217.0	236.0	272.0	312.0	348.0	434.0	500.0	522.0		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400											



# Air cooled screw inverter chiller, high efficiency, standard/low sound

- › High energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Continuous fans speed modulation thanks to inverter driven fans to improve part load efficiency

Cooling Only				EWAH-TZXSB/XLB										
				180	220	270	300	350	390	430	480	580	620	
Space cooling	A Condition 35°C	Pdc	kW	180.38	224.67	270.66	300.22	355	392	427.64	481.86	574.38	619.88	
	ηs,c		%	188.68	195.84	194.04	203.08	196.16	196.4	203.28	206.2	214.96	217.88	
SEER				4.792	4.971	4.926	5.152	4.979	4.985	5.157	5.23	5.449	5.522	
Cooling capacity	Nom.		kW	180	225	271	300	355	392	428	482	574	620	
Power input	Cooling	Nom.	kW	51.8	66.3	79	89.6	103	114	125	144	164	181	
Capacity control	Method			Variable										
	Minimum capacity		%	33.4	26.7	21.6	18.7	16.7	15.4	14.3	12.5	10.8	10	
EER				3.49	3.39	3.43	3.35	3.44	3.42		3.33	3.5	3.41	
IPLV				6.05	6.09	5.92	6.2	5.8	5.81	5.9	6	6.01	6.2	
Dimensions	Unit	Height	mm	2,540										
		Width	mm	2,282										
		Length	mm	3,230	4,130	3,230	4,130	5,887		6,786	7,684	6,877	7,778	
Weight	Unit		kg	2,447	2,813	2,557	2,923	4,445.2	4,629.2	5,004.6	5,748.6	5,720	6,364.8	
	Operation weight		kg	2,484.35	2,862.5	2,606.5	2,972.5	4,598.2	4,870.2	5,237.6	5,981.6	6,021	6,656.8	
Water heat exchanger	Type			Plate heat exchanger				Shell and tube						
	Water volume		l	37	50			153	241	233		301	292	
	Water flow rate	Cooling	Nom.	l/s	8.6	10.7	12.9	14.3	17	18.7	20.4	23	27.4	29.6
	Water pressure drop	Cooling	Nom.	kPa	10.2	11.2	15.7	18.9	23.2	16.7	34.2	26.3	24.7	31.1
Air heat exchanger	Type			Microchannel										
Compressor	Type			Driven vapour compressor										
	Quantity			1				2						
Fan	Type			Direct propeller										
	Quantity			6	8	6	8	12		14	16	14	16	
	Air flow rate	Nom.	l/s	26,172	34,896	26,172	34,896	52,344		61,068	69,792	61,068	69,792	
	Speed		rpm	760										
Sound power level (XSB)	Cooling	Nom.	dB(A)	97.19	98.16	101.14	96.57	100.19	100.4	100.7	101.94	99.44	104.19	
Sound power level (XLB)			dB(A)	92.14	93.15	96.44	96.57	95.14	95.3	95.68	96.78	99.44	99.57	
Sound pressure level (XSB)	Cooling	Nom.	dB(A)	77.7	78.20	81.70	76.60	79.40	79.60		80.40	78.70	82.70	
Sound pressure level (XLB)			dB(A)	72.65	73.19	76.96	76.62	74.36	74.53	74.55	75.29	78.67	78.12	
Operation range	Air side	Cooling	Min.~Max.	-18~55										
	Water side	Cooling	Min.~Max.	-8~18										
Refrigerant	Type/GWP			R-1234(ze)/7										
	Charge		kg	39	52	39	52	73.2		84.6	97.6	102	116.8	
	Circuits	Quantity		1				2						
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm	114.3mm			139.7mm	168.3mm					
Unit	Running current	Cooling	Nom.	A	88.5	113.05	131.55	147.5	176.4	193.47	208.66	243.65	272.5	298.67
	Max current		A	134	173	190	233	266	286	311	372	403	465	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400										

# Air cooled screw inverter chiller, high efficiency, reduced sound



EWAH-TZXS/XLB/XRB

Microtech III

Cooling Only				EWAH-TZXR	180	220	270	300	350	390	430	480	580	620
Space cooling	A Condition 35°C	Pdc	kW	180.38	224.67	270.66	300.22	354.75	391.7	427.42	481.53	573.98	619.32	
	ηs,c			%	188.68	195.84	194.04	203.08	195.44	195.76	202.72	205.68	213.64	217.16
SEER				4.792	4.971	4.926	5.152	4.961	4.969	5.143	5.217	5.416	5.504	
Cooling capacity	Nom.		kW	180	225	271	300	355	392	427	482	574	619	
Power input	Cooling	Nom.	kW	51.8	66.3	79	89.6	103	115	125	145	164	182	
Capacity control	Method			Variable										
	Minimum capacity		%	33.4	26.7	21.6	18.7	16.7	15.4	14.3	12.5	10.8	10	
EER				3.49	3.39	3.43	3.35	3.42	3.41	3.32	3.48	3.39		
IPLV				6.05	6.09	5.92	6.2	5.78	5.77	5.88	5.97	5.98	6.17	
Dimensions	Unit	Height	mm	2,540										
		Width	mm	2,282										
		Length	mm	3,230	4,130	3,230	4,130	5,887	6,786	7,684	6,877	7,778		
Weight	Unit		kg	2,547	2,913	2,717	3,083	4,645.2	4,829.2	5,204.6	5,948.6	6,040	6,684.8	
	Operation weight		kg	2,584.35	2,962.5	2,766.5	3,132.5	4,798.2	5,070.2	5,437.6	6,181.6	6,341	6,976.8	
Water heat exchanger	Type			Plate heat exchanger					Shell and tube					
	Water volume		l	37		50		153	241	233	301	292		
	Water flow rate	Cooling	Nom.	I/s	8.6	10.7	12.9	14.3	16.9	18.7	20.4	23	27.4	29.6
	Water pressure drop	Cooling	Nom.	kPa	10.2	11.2	15.7	18.9	23.2	16.6	34.1	26.3	24.7	31.1
Air heat exchanger	Type			Microchannel										
Compressor	Type			Driven vapour compressor										
	Quantity			1					2					
Fan	Type			Direct propeller										
	Quantity			6	8	6	8	12	14	16	14	16		
	Air flow rate	Nom.	I/s	26,172	34,896	26,172	34,896	51,324	59,709	68,483	59,709	68,433		
	Speed		rpm	760										
Sound power level	Cooling	Nom.	dBA	88.63	89.73	92.27	92.6	91.63	91.73	92.25	93.09	95.27	95.6	
Sound pressure level	Cooling	Nom.	dBA	69.20	69.80	72.80	72.60	70.90	71.00	71.10	71.6	74.5	74.20	
Operation range	Air side	Cooling	Min.~Max.	-18~55										
	Water side	Cooling	Min.~Max.	-8~18										
Refrigerant	Type/GWP			R-1234(z)e/7										
	Charge		kg	39	52	39	52	73.2	84.6	97.6	102	116.8		
	Circuits	Quantity		1					2					
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm		114.3mm		139.7mm		168.3mm				
	Unit	Running	Cooling	Nom.	A	88.5	113.05	131.55	147.5	176.9	194.09	209.13	244.41	273.41
	current	Max	A	134	173	190	233	266	286	311	372	403	465	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400										

# Air cooled screw inverter chiller, premium efficiency, standard/low sound

- › Premium energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Continuous fans speed modulation with EC fans for even higher part load efficiency

Cooling Only				EWAH-TZPSB/PLB		370	440	530	610
Space cooling	A Condition 35°C	Pdc		kW	371.15	435.24	532.06	606.43	
	ηs,c		%	206.56	213.68	220.48	224.96		
SEER				5.239	5.417	5.587	5.699		
Cooling capacity	Nom.		kW	371	435	532	606		
Power input	Cooling	Nom.		kW	102	121	137	163	
Capacity control	Method			Variable					
	Minimum capacity			%	16.7	14.3	11.7	10	
EER				3.62	3.58	3.86	3.7		
IPLV				6.15	6.35	6.36	6.35		
Dimensions	Unit	Height	mm		2,540				
		Width	mm		2,282				
		Length	mm		7,684	9,480	7,778	8,687	
Weight	Unit			kg	5,741.4	6,722	6,364.8	7,140.2	
	Operation weight			kg	5,982.4	7,023	6,656.8	7,636.2	
Water heat exchanger	Type			Shell and tube					
	Water volume			l	241	301	292	496	
	Water flow rate	Cooling	Nom.	l/s	17.7	20.8	25.4	29	
	Water pressure drop	Cooling	Nom.	kPa	24.4	15	15.3	18	
Air heat exchanger	Type			Microchannel					
Compressor	Type			Driven vapour compression					
	Quantity			2					
Fan	Type			Direct propeller					
	Quantity			16	20	16	18		
	Air flow rate	Nom.		l/s	251,251.0	314,064	251,251.0	282,658.0	
	Speed			rpm					
				760					
Sound power level (PSB)	Cooling	Nom.		dBA	100.3	100.8	103.24	104.21	
Sound power level (PLB)	Cooling	Nom.		dBA	95.48	96	98.71	99.63	
Sound pressure level (PSB)	Cooling	Nom.		dBA	78.80		81.80	82.40	
Sound pressure level (PLB)	Cooling	Nom.		dBA	74.03	73.96	77.25	77.86	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-18~-55				
	Water side	Cooling	Min.~Max.	°CDB	-8~-18				
Refrigerant	Type/GWP			R-1234(ze)/7					
	Circuits			Quantity					
				2					
Refrigerant circuit	Charge			kg	90.4	113	116.8	131.2	
Refrigerant charge	Per circuit			kg	316.4	395.5	408.8	459.2	
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm					
Unit	Running	Cooling	Nom.		A	175.85	205.4	233.82	272.98
	current	Max		A	272	319	350	424	
Power supply	Phase/Frequency/Voltage			Hz/V					
				3~/50/400					

# Air cooled screw inverter chiller, premium efficiency, reduced sound



EWAH-TZPSB/PLB/PRB


Microtech III

Cooling Only				EWAH-TZPRB	370	440	530	610
Space cooling	A Condition 35°C	Pdc	kW	370.96	435.06	531.76	606.09	
	ηs,c		%	206.04	213.28	219.28	223.8	
SEER				5.226	5.407	5.557	5.67	
Cooling capacity	Nom.		kW	371	435	532	606	
Power input	Cooling	Nom.	kW	102	122	138	164	
Capacity control	Method			Variable				
	Minimum capacity		%	16.7	14.3	11.7	10	
EER				3.61	3.57	3.84	3.69	
IPLV				6.12		6.32		
Dimensions	Unit	Height	mm	2,540				
		Width	mm	2,282				
		Length	mm	7,684	9,480	7,778	8,687	
Weight	Unit		kg	5,941.4	6,922	6,684.8	7,460.2	
		Operation weight	kg	6,182.4	7,223	6,976.8	7,956.2	
Water heat exchanger	Type			Shell and tube				
	Water volume		l	241	301	292	496	
	Water flow rate	Cooling	Nom.	l/s	17.7	20.8	25.4	28.9
	Water pressure drop	Cooling	Nom.	kPa	24.4	14.9	15.3	18
Air heat exchanger	Type			Microchannel				
Compressor	Type			Driven vapour compression				
	Quantity			2				
Fan	Type			Direct propeller				
	Quantity			16	20	16	18	
	Air flow rate	Nom.	l/s	246,359.0	307,948.0	246,359.0	276,541.0	
	Speed		rpm	760				
Sound power level	Cooling	Nom.	dBA	92.37	92.94	94.94	95.73	
Sound pressure level	Cooling	Nom.	dBA	70.90		73.50	74.00	
Operation range	Air side	Cooling	Min.~Max.	-18~55				
	Water side	Cooling	Min.~Max.	-8~18				
Refrigerant	Type/GWP			R-1234(ze)/7				
	Circuits		Quantity	2				
Refrigerant circuit	Charge		kg	90.4	113	116.8	131.2	
Refrigerant charge	Per circuit		kg	316.4	395.5	408.8	459.2	
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm				
	Unit	Running	Cooling	Nom.	A	205.83	234.54	273.8
	current	Max	A	272	319	350	424	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400				



# Air cooled screw inverter chiller, high efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils

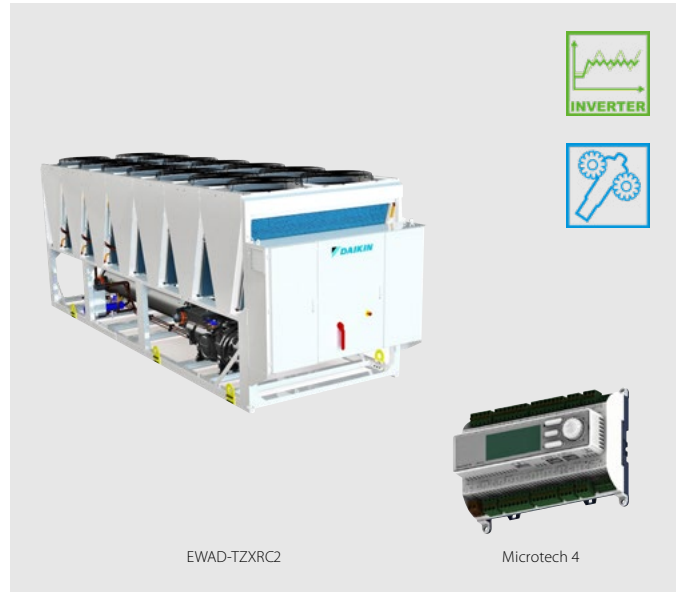

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXRC2


Cooling Only			EWAD-TZXRC2	C11	C12	H12	C14	C15	H16	H17	
Space cooling	A Condition 35°C Pdc		kW	1,122	1,204	1,279	1,362	1,499	1,625	1,735	
	ηs,c		%	208.8	210.2	209.8	207.8	209.4	209.3	209.7	
SEER				5.30	5.33	5.32	5.27	5.31		5.32	
Cooling capacity	Nom.		kW	1,122	1,204	1,279	1,362	1,499	1,625	1,735	
Power input	Cooling	Nom.	kW	356.3	377.3	403	450.1	501.4	547.6	598.6	
Capacity control	Method			Variable							
	Minimum capacity		%	12.5							
EER				3.15	3.19	3.17	3.03	2.99	2.97	2.90	
IPLV				5.51	5.55	5.49	5.64	5.65	5.64	5.6	
Dimensions	Unit	Height	mm	2,540							
		Width	mm	2,282							
		Length	mm	10,510	11,402	12,302	11,402	12,302	13,202	14,104	
Weight	Unit		kg	9,322	10,112	10,515	10,716	11,134	11,564	12,037	
	Operation weight		kg	9,879	11,123	11,526	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube							
	Water volume		l	557	1,011						
	Water pressure drop	Cooling	Nom.	kPa	51.4	32.7	36.5	40.8	48.5	56.1	63.2
Air heat exchanger	Type			Microchannel							
Compressor	Type			Inverter driven single screw compressor							
	Quantity			2							
Fan	Type			Direct propeller							
	Quantity			22	24	26	24	26	28	30	
	Air flow rate	Nom.	l/s	81,518	89,145	96,375	89,145	96,375	104,002	111,232	
	Speed		rpm	700							
Sound power level	Cooling	Nom.	dB(A)	92	93	94	93	94	95		
Sound pressure level	Cooling	Nom.	dB(A)	70		71				72	
Refrigerant	Type/GWP			R-134a/1,430							
	Charge		kg	175	200	220	200	220	250	270	
	Circuits	Quantity		2							
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm	273mm	219.1mm	273mm				
Unit	Starting current	Max	A	0.0							
	Running current	Cooling	Nom.	A	612.3	651.0	689.6	762.5	834.0	901.3	982.6
		Max	A	918	939	994	1,085	1,124	1,218	1,313	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400							

performances according to CSS software 10.27



# Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils

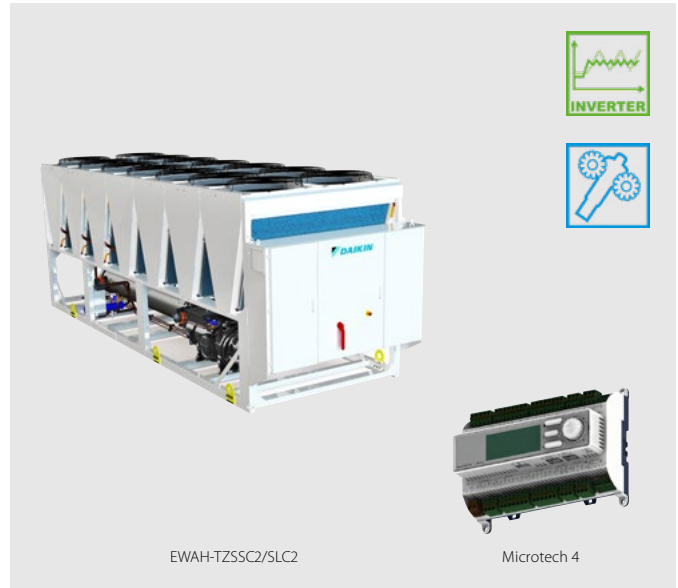

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSSC2



EWAH-TZSLC2


Cooling Only				EWAH-TZSSC2/SLC2												
				710	770	880	940	990	H10	C11	C12	C13	C14	C15	C16	
Space cooling	A Condition 35°C Pdc			kW	712.28	765.6	879.39	942.78	990.5	1,055.51	1,117.22	1,230.93	1,301.55	1,431.96	1,518.61	1,603.34
	ηs,c			%	181.52	183.08	182.16	181.72	182.84	181.4	182.24	179.28	193.88	192.32	190.76	188.92
SEER					4.613	4.652	4.629	4.618	4.646	4.61	4.631	4.557	4.922	4.883	4.844	4.798
Cooling capacity	Nom.			kW	712.3	765.6	879.4	942.8	990.5	1,056	1,117	1,231	1,302	1,432	1,519	1,603
Power input	Cooling	Nom.		kW	230.7	246.6	284.9	303.9	318.9	339.4	357.4	396	418.4	465.3	510.4	567.4
Capacity control	Method			Inverter controlled												
	Minimum capacity			%	12.5											
EER					3.088	3.104	3.087	3.102	3.107	3.11	3.126	3.109	3.111	3.077	2.975	2.826
IPLV					4.79	4.85	4.8	4.74	4.78	4.71	4.73	4.63	5.17	5.08	5.07	4.98
Dimensions	Unit	Height		mm	2,540											
		Width		mm	2,280											
		Length		mm	6,909	7,809	8,709	9,602	10,510	11,402	12,302	11,402	12,302	13,202	13,202	14,102
Weight	Unit			kg	7,033	7,660	8,093	8,900	9,288	10,073	10,475	10,716	11,134	11,564	12,037	
	Operation weight			kg	7,313	8,152	8,585	9,483	9,871	11,116	11,518	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube												
	Water volume			l	280		492		583		1,043		1,011			
	Water flow rate	Cooling	Nom.	l/s	33.97	36.51	41.94	44.96	47.24	50.34	53.27	58.70	62.06	68.28	72.41	76.45
Air heat exchanger	Water pressure drop			kPa	44.6	50.8	59.7	67.7	59.9	67.2	44.3	52.7	38.7	45.9	51	56.3
	Type			Microchannel												
Compressor	Type			Inverter driven single screw compressor												
	Quantity			2												
Fan	Type			Direct propeller, on/off fans												
	Quantity			14	16	18	20	22	24	26	24	26	28	30		
	Air flow rate	Nom.		l/s	71,438	81,644	91,849	102,054	112,259	122,464	132,670	122,464	132,670	142,876	153,081	
	Speed			rpm	900											
Sound power level (SSC2)	Cooling	Nom.		dB(A)	98	99	100	101		102	103	102		103	104	
Sound power level (SLC2)	Cooling	Nom.		dB(A)	101	102	103	104	105	106	107	105	106	107	108	
Sound pressure level (SSC2)	Cooling Nom.			dB(A)	77		78		79		80		79		80	
Sound pressure level (SLC2)	Cooling Nom.			dB(A)	80		81	82		83	84	83		84	85	
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	120	130	141	150	175	200	220	200	220	250	270	
	Circuits Quantity			2												
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm		219.1mm				273mm						
Unit	Starting current			A	0											
	Running current	Cooling	Nom.	A	408.6	433.3	493.5	521.5	549.9	579.6	612.7	668.8	718.8	780.9	848.9	934.8
		Max		A	609.0	640.0	717.0	763.0	811.0	869.0	924.0	1,032.0	1,029.0	1,119.0	1,198.0	1,226.0
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

performances according to CSS software 10.27



# Air cooled screw inverter chiller, standard efficiency, reduced sound

- › Optimized energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils

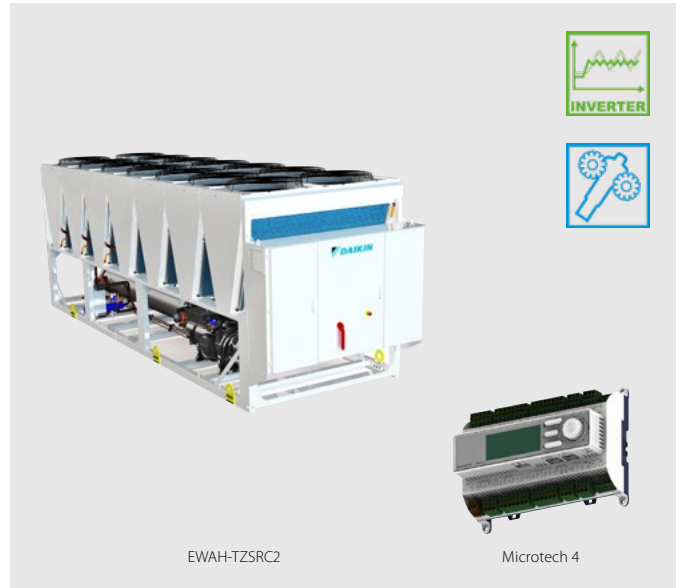

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSRC2

Cooling Only				EWAH-TZSRC2												
				710	770	880	940	990	H10	C11	C12	C13	C14	C15	C16	
Space cooling	A Condition 35°C Pdc			kW	696.3	749.16	859.56	922.06	970.53	1,034.22	1,095.25	1,204.39	1,273.47	1,399.7	1,484.25	1,551.82
	ηs,c			%	204.76	202.64	202.68	204.16	209.88	207.24	210.36	207.08	216.56	213.72	213.96	213.16
SEER					5.194	5.141	5.142	5.179	5.322	5.256	5.334	5.252	5.489	5.418	5.424	5.404
Cooling capacity	Nom.			kW	696.3	749.2	859.6	922.1	970.5	1,034	1,095	1,204	1,273	1,400	1,484	1,552
Power input	Cooling	Nom.		kW	232.1	253	290.9	309.1	318.8	340.5	354	396.4	424.2	479.7	524.7	581
Capacity control	Method			Inverter controlled												
	Minimum capacity			%	12.5											
EER					3.001	2.962	2.955	2.983	3.044	3.038	3.094	3.038	3.002	2.918	2.829	2.671
IPLV					5.43	5.4	5.36	5.37	5.52	5.46	5.49	5.35	5.79	5.73	5.71	
Dimensions	Unit	Height	mm	2,540												
		Width	mm	2,280												
		Length	mm	6,909	7,809	8,709	9,602	10,510	11,402	12,302	11,402	12,302	13,202	14,102		
Weight	Unit	Operation weight		kg	7,033	7,660	8,093	8,900	9,288	10,073	10,475	10,716	11,134	11,564	12,037	
				kg	7,313	8,152	8,585	9,483	9,871	11,116	11,518	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube												
	Water volume			l	280		492		583		1,043		1,011			
	Water flow rate	Cooling	Nom.	l/s	33.21	35.73	41.00	43.98	46.29	49.32	52.23	57.43	60.72	66.74	70.77	73.99
Air heat exchanger	Type			Microchannel												
	Compressor			Inverter driven single screw compressor												
Fan	Quantity			2												
	Type			Direct propeller, on/off fans												
	Quantity				14	16	18	20	22	24	26	24	26	28	30	
	Air flow rate	Nom.		l/s	51,803	59,430	66,660	74,287	81,518	89,145	96,375	89,145	96,375	104,002	111,232	
Sound power level	Cooling			Nom.	dBA	91		92	93	94	95	96	95		96	97
	Sound pressure level			Nom.	dBA	70		71	72		73	72	73		74	
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	120	130	141	150	175	200	220	200	220	250	270	
	Circuits			Quantity	2											
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm	219.1mm				273mm							
Unit	Starting current			A	0											
	Running current	Cooling	Nom.	A	414.9	446.8	505.2	529.7	554.4	581.0	611.1	667.2	736.4	796.5	863.9	952.0
		Max		A	609.0	640.0	717.0	763.0	811.0	869.0	924.0	1,032.0	1,029.0	1,119.0	1,198.0	1,226.0
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

performances according to CSS software 10.27



# Air cooled screw inverter chiller, high efficiency, standard/low sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXSC2



EWAH-TXLC2

Cooling Only				EWAH-TZXSC2/XLC2											
				670	780	840	950	C10	C11	C12	C13	C14	C15		
Space cooling	A Condition 35°C Pdc			kW	669.32	783.42	840.22	947.7	1,014.01	1,119.73	1,236.7	1,347.06	1,442.56	1,526.76	
	ηs,c			%	209.96	211.56	212.8	215.88	216.72	213.16	219.2	218.36	217.48	216.32	
SEER					5.324	5.364	5.395	5.472	5.493	5.404	5.555	5.534	5.512	5.483	
Cooling capacity	Nom.			kW	669.3	783.4	840.2	947.7	1,014	1,120	1,237	1,347	1,443	1,527	
Power input	Cooling		Nom.	kW	206	242	260.2	292.4	310.6	351.7	380.1	420.4	460.7	507.5	
	Capacity control Method				Inverter controlled										
Minimum capacity				%	12.5										
EER					3.249	3.237	3.229	3.241	3.264	3.184	3.253	3.204	3.131	3.009	
IPLV					5.59		5.6	5.64	5.66	5.53	5.86	5.8	5.76	5.7	
Dimensions	Unit	Height		mm	2,540										
		Width		mm	2,280										
		Length		mm	6,909	7,809	8,709	10,510	11,402	12,302	11,402	12,302	13,202	14,102	
Weight	Unit			kg	7,033	7,660	8,093	9,288	10,073	10,475	10,716	11,134	11,564	12,037	
	Operation weight				kg	7,313	8,152	8,585	9,871	11,116	11,518	11,727	12,145	12,575	13,048
Water heat exchanger	Type			Shell and tube											
	Water volume			l	280	492		583	1,043			1,011			
	Water flow rate	Cooling	Nom.	l/s	31.92	37.36	40.07	45.20	48.35	53.39	58.97	64.23	68.78	72.80	
	Water pressure drop	Cooling	Nom.	kPa	39.9	48.5	54	55.3	37.2	44.5	35.3	41.1	46.5	51.5	
Air heat exchanger	Type			Microchannel											
Compressor	Type			Inverter driven single screw compressor											
	Quantity				2										
Fan	Type			Direct propeller, on/off fans											
	Quantity				14	16	18	22	24	26	24	26	28	30	
	Air flow rate Nom.			l/s	53,389	61,016	68,643	83,897	91,524	99,151	122,464	132,670	142,876	153,081	
	Speed				rpm	700						900			
Sound power level (XSC2)	Cooling	Nom.	dBA	98	99	100	101	103	105	104	105	106	107		
Sound power level (XLC2)	Cooling	Nom.	dBA	93	95		96	98	99	101	102		103		
Sound pressure level (XSC2)	Cooling	Nom.	dBA	76	78		79	80	82			83		84	
Sound pressure level (XLC2)	Cooling	Nom.	dBA	72	73		74	75	76		79			80	
Refrigerant	Type/GWP			R-1234(ze)/7											
	Charge				kg	120	130	141	175	200	220	200	220	250	270
	Circuits Quantity				2										
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm	219.1mm			273mm							
Unit	Starting current			A	0										
	Running current	Cooling	Nom.	A	373.9	431.3	459.1	513.1	544.2	604.8	660.3	717.4	778.2	848.9	
		Max			A	588.0	625.0	693.0	754.0	836.0	936.0	967.0	1,042.0	1,132.0	1,157.0
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

performances according to CSS software 10.27





# Air cooled screw inverter chiller, high efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXRC2

Cooling Only				EWAH-TZXRC2											
				670	780	840	950	C10	C11	C12	C13	C14	C15		
Space cooling	A Condition 35°C Pdc			kW	669.17	783.17	840	947.47	1,013.69	1,119.41	1,212.9	1,321.24	1,415.52	1,497.21	
	ηs,c			%	208.32	211.4	212.68	215.84	216.12	212.64	219.4	220.16	218.84	217.44	
SEER					5.283	5.36	5.392	5.471	5.478	5.391	5.56	5.579	5.546	5.511	
Cooling capacity	Nom.			kW	669.2	783.2	840	947.5	1,014	1,119	1,213	1,321	1,416	1,497	
Power input	Cooling	Nom.		kW	206.2	243.3	261.9	292.6	310.8	351.9	382.2	426	467.4	514.6	
Capacity control	Method			Inverter controlled											
	Minimum capacity			%	12.5										
EER					3.246	3.219	3.207	3.238	3.261	3.181	3.174	3.101	3.029	2.91	
IPLV					5.58		5.59	5.63	5.65	5.52	5.94	5.86	5.81	5.79	
Dimensions	Unit	Height		mm	2,540										
		Width		mm	2,280										
		Length		mm	6,909	7,809	8,709	10,510	11,402	12,302	11,402	12,302	13,202	14,102	
Weight	Unit			kg	7,033	7,660	8,093	9,288	10,073	10,475	10,716	11,134	11,564	12,037	
	Operation weight			kg	7,313	8,152	8,585	9,871	11,116	11,518	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube											
	Water volume			l	280	492		583	1,043		1,011				
	Water flow rate	Cooling	Nom.	l/s	31.91	37.35	40.06	45.19	48.34	53.38	57.83	63.00	67.49	71.39	
Water pressure drop		Cooling	Nom.	kPa	39.9	48.4	54	55.3	37.2	44.4	34.1	39.7	44	49.7	
Air heat exchanger	Type			Microchannel											
Compressor	Type			Inverter driven single screw compressor											
	Quantity			2											
Fan	Type			Direct propeller, on/off fans											
	Quantity			14	16	18	22	24	26	24	26	28	30		
	Air flow rate	Nom.		l/s	51,803	59,430	66,660	81,518	89,145	96,375	89,145	96,375	104,002	111,232	
	Speed			rpm	700										
Sound power level	Cooling	Nom.		dBA	90	91	92	93	94	95	94	95	96		
Sound pressure level	Cooling	Nom.		dBA	69	70		71		72			73		
Refrigerant	Type/GWP			R-1234(ze)/7											
	Charge			kg	120	130	141	175	200	220	200	220	250	270	
	Circuits			Quantity	2										
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm	219.1mm			273mm							
Unit	Starting current			A	0										
	Running current	Cooling	Nom.	A	374.9	432.6	460.2	514.2	545.4	606.0	670.1	725.0	783.7	853.8	
		Max		A	588.0	625.0	693.0	754.0	836.0	936.0	967.0	1,042.0	1,132.0	1,157.0	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

performances according to CSS software 10.27

# Air Cooled Screw Chiller - fix speed

- › Optimised for use with R-134a
- › Large operation range (ambient temperature down to -18°C)
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › 2 or 3 independent refrigerant circuits for outstanding reliability and maximum safety for maintenance
- › Extremely wide range from 290kW to over 2 MW
- › Units with stepless regulation offer the benefit of following the system energy demand at any time with high efficiency if compared to the units with step regulation. Each unit has infinitely variable capacity control from 100% down to 12,5%
- › Advanced compressor and fans design that operate at very low sound levels
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions



More details and final information can be found by scanning or clicking the QR codes.



EWAD-T-SSC



EWAD-T-SLC

Cooling Only				EWAD-T-SSC/SLC																											
Cooling capacity	Nom.			290	330	370	510	520	580	700	800	940	C10	C11	C17	C19	C20	C21	H10	H12	H13	H14	H15	H16	H18						
Power input	Cooling	Nom.		kW																											
Capacity control	Method			Stepless																											
	Minimum capacity			%																											
SEPR				5.14	5.1	5.16	5.5		5.51	5.56	5.51	5.52	5.51	5.51	5.42	5.38	5.51	5.5	5.52	5.5	5.54	5.56	5.5								
EER				3.15	2.94	3.1	3.02	3.07	3.03	3.01	3.03	2.85	2.87	2.88	2.84	2.87	2.8	2.85	2.88	2.92	2.98	2.8									
IPLV				4.31	4.22	4.35	4.9	4.78	5.04	4.63	4.56	4.63	4.65	4.67	4.6	4.5	4.46	4.57	4.64	4.62	4.63	4.64	4.6	4.63							
Dimensions	Unit	Height	mm	2,540																											
		Width	mm	2,282																											
		Length	mm	3,239	4,139	5,039	6,009	6,909	7,809	11,409	12,309	13,209	14,109	6,909	7,809	8,709	9,609	10,510	11,409												
Weight	Unit	Operation weight	kg	3,062	4,104	4,724	4,860	5,316	5,663	5,950	6,468	11,277	11,808	11,999	6,490	7,062	7,362	7,654	10,157	11,277	11,385										
		Operation weight	kg	3,162	4,274	4,894	5,030	5,402	5,903	6,240	6,768	12,148	12,761	13,034	7,002	7,554	7,842	8,134	10,657	12,148	12,338										
Water heat exchanger	Type			Shell and tube																											
		Water volume	l	89	181	164	170	164	315	240	289	502	871	953	103	518	492	470	461	522	871	953									
		Water flow rate	Cooling	Nom.	l/s	14	16	17.9	23.9	25	27.1	33.6	38.7	44.5	47.4	54.2	84	92	96.6	100	49.9	59.3	64.2	68.8	74.1	80.3	88.5				
		Water pressure drop	Cooling	Nom.	kPa	24.5	31.2	45.3	34	51.8	67.2	46.9	34.4	42.9	48	57.1	40.2	43.4	43.9	46.9	44.6	35.3	46.2	56	65.9	37.1	40.4				
Air heat exchanger	Type			Microchannel																											
Compressor	Type			Asymm single screw																											
	Quantity			2					3					2					3												
Fan	Type			Direct propeller, on/off fans																											
	Quantity			6	8	10	12	14	16	24	26	28	30	14	16	18	20	22	24												
	Air flow rate	Nom.	l/s	30,245	40,326	50,408	60,490	70,571	80,653	120,981	131,062	141,143	151,224	70,572	80,654	90,735	100,816	110,899	120,981												
	Speed	rpm	900																												
Sound power level (SSC)	Cooling	Nom.	dBA	98				99				100				103				100				101				103			
		Nom.	dBA	78				79				80				79				78				79				80			
Sound pressure level (SLC)	Cooling	Nom.	dBA	94				95				96				97				98				99				100			
		Nom.	dBA	74				75				76				77				76				77							
Refrigerant	Type			R-134a																											
	Charge	kg	50	55	58	66	67	93.6	109.2	124.8	187	203	218	234	109.2	124.8	140.4	156	172	187											
	Circuits	Quantity	2					3					2					3													
Piping connections	Evaporator water inlet/outlet (OD)			114.3	139.7				168.3				219.1	273mm				219.1mm				273mm									
Unit	Starting current	Max	A	260	320	354	576	583	606	642	694	909	922	1,025	1,515	1,604	1,668	1,732	1,005	1,141	1,160	1,225	1,440	1,446	1,584						
		Running current	Cooling	Nom.	A	161	189	204	272	278	303	377	418	476	526	602	920	1,019	1,059	1,093	558	660	704	742	812	860	984				
			Max	A	226	256	290	364	394	417	519	571	654	712	815	1,260	1,394	1,458	1,522	750	886	950	1,015	1,116	1,191	1,329					
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400																												

performances according to CSS software 10.27

# Air Cooled Screw Chiller - fix speed

- › Optimised for use with R-134a
- › Large operation range (ambient temperature down to -18°C)
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › 2 or 3 independent refrigerant circuits for outstanding reliability and maximum safety for maintenance
- › Extremely wide range from 290kW to over 2 MW
- › Units with stepless regulation offer the benefit of following the system energy demand at any time with high efficiency if compared to the units with step regulation. Each unit has infinitely variable capacity control from 100% down to 12,5%
- › Advanced compressor and fans design that operate at very low sound levels
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions



More details and final information can be found by scanning or clicking the QR codes.



EWAD-T-XSC



EWAD-T-XLC

Cooling Only			EWAD-T-XSC/XLC																				
Cooling capacity	Nom.		kW																				
Power input	Cooling	Nom.	kW																				
Capacity control	Method		Stepless																				
	Minimum capacity		%																				
SEPR			5.18	5.52	5.54	5.51	5.51	5.5	5.55	5.52	5.61	5.52	5.56	5.55	5.59	5.57	5.52	5.56	5.58	5.57	5.57	5.58	5.58
EER			3.32	3.29	3.24	3.16	3.09	3.26	3.19	3.01	3.02	3.15	3.02	3.1	3	3.13	3.05	2.96	3.1	3.11	3.12	3.09	3.14
IPLV			4.15	4.34	4.6	4.77	4.46	4.82	4.88	4.97	4.68	4.54	4.76	4.69	4.56	4.62	4.67	4.6	4.65	4.69	4.7	4.6	4.62
Dimensions	Unit	Height	mm																				
		Width	mm																				
		Length	mm																				
Weight	Unit	kg																					
	Operation weight	kg																					
Water heat exchanger	Type		Shell and tube																				
	Water volume		l																				
	Water flow rate	Cooling	Nom.	l/s																			
	Water pressure drop	Cooling	Nom.	kPa																			
Air heat exchanger	Type		Microchannel																				
Compressor	Type		Asymm single screw																				
	Quantity																						
Fan	Type		Direct propeller, on/off fans																				
	Quantity																						
	Air flow rate	Nom.	l/s																				
	Speed		rpm																				
Sound power level (XSC)	Cooling	Nom.	dBA																				
Sound pressure level (XSC)	Cooling	Nom.	dBA																				
Sound power level (XLC)	Cooling	Nom.	dBA																				
Sound pressure level (XLC)	Cooling	Nom.	dBA																				
Refrigerant	Type		R-134a																				
	Charge		kg																				
	Circuits	Quantity																					
Piping connections	Evaporator water inlet/outlet (OD)																						
Unit	Starting current	Max	A																				
	Running current	Cooling	Nom.	A																			
		Max		A																			
Power supply	Phase/Frequency/Voltage		Hz/V																				

performances according to CSS software 10.27

# Air Cooled Screw Chiller - fix speed

- › Optimised for use with R-134a
- › Large operation range (ambient temperature down to -18°C)
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › 2 or 3 independent refrigerant circuits for outstanding reliability and maximum safety for maintenance
- › Extremely wide range from 290kW to over 2 MW
- › Units with stepless regulation offer the benefit of following the system energy demand at any time with high efficiency if compared to the units with step regulation. Each unit has infinitely variable capacity control from 100% down to 12,5%
- › Advanced compressor and fans design that operate at very low sound levels
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions



More details and final information can be found by scanning or clicking the QR codes.



EWAD-T-XRC

Cooling Only			EWAD-T-XRC																																																
Cooling capacity	Nom.		kW																																																
Power input	Cooling	Nom.	kW																																																
Capacity control	Method		Stepless																																																
	Minimum capacity	%	12.5																																																
SEPR			5,16	5,14	5,51	5,52	5,5	5,5	5,5	5,5	5,5	5,5	5,52	5,5	5,52	5,55	5,56	5,5	5,55	5,56	5,53	5,53	5,54	5,55																											
EER			3,19	3,17	3,12	3,04	2,96	3,14	3,07	2,81	2,79	2,95	2,77	2,89	2,93	2,82	2,69	2,92	2,93	2,89	2,87	2,9	2,95																												
IPLV			4,25	4,3	4,93	4,73	4,75	4,97	5,06	4,98	4,53	4,64	4,65	4,63	4,54	4,72	4,66	4,68	4,56	4,65	4,52	4,64	4,61	4,7																											
Dimensions	Unit	Height	mm																																																
		Width	mm																																																
		Length	4,139		5,039			6,009			7,809		9,609		13,209		14,109		8,709		9,609		10,510		11,409		12,309		14,109																						
Weight	Unit	kg	4,344		4,640			5,140			5,678		5,596		5,943		6,616		7,894		12,238		12,432		7,602		7,632		8,260		11,652		12,059		12,047																
		Operation weight	4,514		4,810			5,310			5,848		5,682		6,183		6,916		8,374		13,168		13,467		8,082		8,112		8,710		12,523		12,930		12,977																
Water heat exchanger	Type		Shell and tube																																																
	Water volume	l	134	129	170			164	170	315	232	289	492	522	101	502	481	871	522																																
	Water flow rate	Cooling	Nom.	1/s	16,3	17,6	18,6	19,4	20,4	22,9	25,1	26,1	33,8	37,4	43,5	46,3	58,8	84,9	92,6	94,7	50,7	54,5	62,9	74,1	78,6	89,7																									
	Water pressure drop	Cooling	Nom.	kPa	21,3	27,4	19,1	20,6	22,4	44,1	37,2	35	30,4	35,4	41,1	46	34,8	40,6	42,8	44,7	50,8	57,8	42	32,1	35,7	44,9																									
Air heat exchanger	Type		Microchannel																																																
Compressor	Type		Asymm single screw																																																
	Quantity		2						3						2		3																																		
Fan	Type		Direct propeller, on/off fans																																																
	Quantity		8		10			12			16		20		28		30		18		20		22		24		26		30																						
	Air flow rate	Nom.	l/s	29,963		37,275			44,943			59,568		59,213		74,906		105,581		113,250		67,237		74,550		82,219		90,600		98,269		113,250																			
	Speed	rpm	700																																																
Sound power level	Cooling	Nom.	89		90			91			92		93		95		92		93		94		95																												
	Sound pressure level	Cooling	Nom.	69			70			71		72		70		71		72		71																															
Refrigerant	Type		R-134a																																																
	Charge	kg	52	54	65	66			72	93,6	124,8	156	218	234	140,4	156	171,6	187	203	234																															
	Circuits	Quantity	2						3						2		3																																		
Piping connections	Evaporator water inlet/outlet (OD)		139,7						168,3						219,1		273mm		219,1mm		273mm																														
Unit	Starting current	Max	A		296			340			361			454		478		583		589		612		642		694		916		929		1,154		1,528		1,616		1,674		1,018		1,038		1,173		1,446		1,453		1,603	
		Running current	Cooling	Nom.	A	182	197	203	216	231	267	274	291	395	439	480	537	657	928	1,037	1,100	555	593	700	828	873	974																								
		Max	A	262	276	297	321	345	371	400	423	519	571	661	719	899	1,273	1,406	1,464	763	828	963	1,122	1,198	1,348																										
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400																																																

performances according to CSS software 10.27



Daikin, world's first company introducing a new generation of air cooled scroll chiller series with refrigerant R-32.

BLUEEVOLUTION

R-32

# EWAT-B

Multi scroll chiller with R-32 refrigerant

- ✓ Top class efficiency, SEER up to 4,84. Overcoming 2021 Eco-design requirements!
- ✓ Environmental friendly refrigerant → First in the market
- ✓ New R-32 optimized scroll compressors and heat exchangers
- ✓ The Global Warming Potential (GWP) of R-32 refrigerant is 675, which is only one third compared to commonly used refrigerant R-410
- ✓ The low GWP R-32 refrigerant falls into category class A2L in ISO817 and it can be safely used in many applications including chilled water systems
- ✓ As a single component refrigerant, R-32 is also easier to recycle and reuse another environmental plus in its favour
- ✓ Wide capacity range: 80 – 700 kW
- ✓ Microchannel condensing coil, for reduced refrigerant charge
- ✓ Silver and Gold efficiency versions
- ✓ 3 sound configurations
- ✓ Full compatibility with Daikin on Site
- ✓ New Hydronic Kit configurations (single and twin pump, inertial tank, VFD)
- ✓ Single and dual circuit version overlapping between 150 kW and 350 kW
  - > Single circuit units fits 2 or 3 compressors
  - > Dual circuit units fits 4 or 5 or 6 compressors
- ✓ Extensive option lists
- ✓ Fan speed modulation option (VFD)

Extensive options list

Including new options:

- > Partial heat recovery
- > Buffer tank
- > VFD pumps and variable flow control
- > Master/Slave supplied standard
- > Fan Silent Mode





## Single-V Layout

- › Slim layout
- › Higher flexibility: new intermediate sound configuration for both Silver and Gold versions

## Modular-V Layout:

- › Brand new layout
- › Better part load efficiency (SEER) vs. previous generation:
  - › +4% with standard arrangement
  - › +7% with VFD fan option



## Free-cooling options

It's the capability of a system/equipment to cool air or water by taking advantage of the favorable outdoor conditions when ambient temperature is reducing, for example during winter or intermediate season or even during night time operation. Free cooling operation allows to reduce the power consumption generated by traditional mechanical cooling (e.g. Compressors).

The use of the outdoor ambient as a source for cooling is the perfect way to answer to the new "EPBD Directive" (Energy Performance of Buildings Directive):

### Free-cooling - Light

Refrigerant migration system allowing to recover up to 25% of normal unit capacity.

### Free-cooling - Full

Refrigerant migration system allowing to recover up to 25% of normal unit capacity.

### Benefits

- › Glycol free solution
- › No refrigerant pump required
- › No extra footprint vs standard unit
- › No extra pressure drops on water side

### Daikin on Site

Fully compatible with Daikin on Site cloud based platform that allows a number of advanced functionalities including:

- › Remote monitoring
- › System optimization
- › Preventive maintenance
- › Remote access with one click via LAN or GSM modem




### Connection to Intelligent Chiller Manager

In case of more complex installations Daikin can offer the Intelligent Chiller Manager option, allowing energy optimisation of the system and, when necessary, full customization of the control solutions to the specific installation's needs:

- › High number of units
- › Peripheral controls

# Air cooled scroll chiller, standard efficiency, standard/low sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input

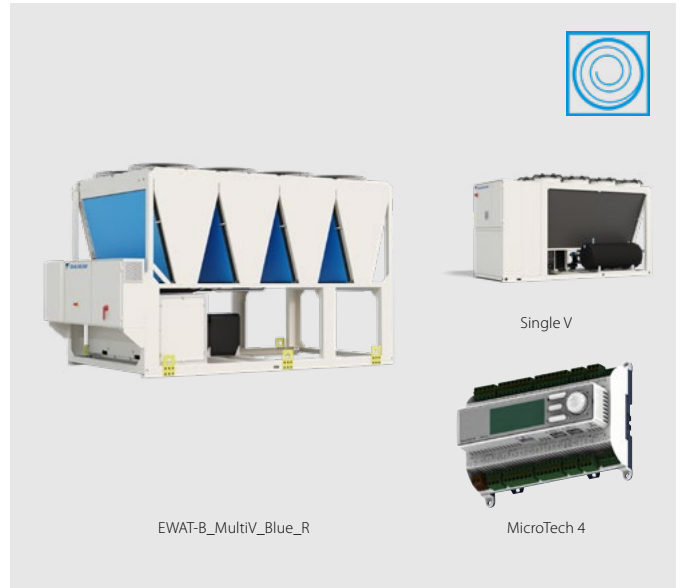

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SSB



EWAT-B-SLB

Cooling Only			EWAT-B-SSB/SLB																												
			085	115	135	155	175	195	205	215	240	260	290	310	330	340	350	420	460	510	570	610	670								
Space cooling	A Condition 35°C Pdc		kW																												
	η <sub>s,c</sub>		%																												
	η <sub>s,c</sub> + VFDFAN		%																												
SEER																															
SEER + VFDFAN																															
Cooling capacity	Nom.		kW																												
Power input	Cooling	Nom.	kW																												
Capacity control	Method		Step																												
	Minimum capacity		%																												
EER																															
IPLV																															
EER + VFDFAN																															
IPLV + VFDFAN																															
Dimensions	Unit	Height	mm																												
		Width	mm																												
		Length	mm																												
Weight (SSB)	Unit		kg																												
	Operation weight		kg																												
Weight (SLB)	Unit		kg																												
	Operation weight		kg																												
Water heat exchanger	Type		Braze plate																												
	Water volume		l																												
	Water flow rate	Cooling	Nom.	l/s																											
Air heat exchanger	Type		Microchannel																												
	Compressor	Type	Scroll compressor																												
Fan	Quantity																														
	Type		Direct propeller																												
	Quantity																														
Sound power level (SSB)	Cooling	Nom.	dB(A)																												
	Sound power level (SLB)	Cooling	Nom.	dB(A)																											
Sound pressure level (SSB)	Cooling	Nom.	dB(A)																												
	Sound pressure level (SLB)	Cooling	Nom.	dB(A)																											
Refrigerant	Type/GWP		R-32/675																												
	Charge		kg																												
	Circuits	Quantity																													
Piping connections	Evaporator water inlet/outlet (OD)																														
Unit	Starting current	Max	A																												
	Running current	Cooling	Nom.	A																											
		Max		A																											
Power supply	Phase/Frequency		Hz																												



# Air cooled scroll chiller, standard efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SRB

Cooling Only				EWAT-B-SRB																											
				085	115	135	155	175	195	205	215	240	260	290	310	330	340	350	420	460	510	570	610	670							
Space cooling	A Condition 35°C Pdc ηs,c	kW		76.49	105	123.88	150.13	164.87	181.31	200.51	203.5	231.19	248.68	266.45	290.26	311.62	329.53	330.8	398.49	443.51	488.06	534.23	578.74	637.95							
		%		161	173	161	166.2	162.2	167.8	161	179.8	164.2	174.2	172.2	173.8	179	165	179	179.8	179.4	179.4	179.4	179.4	179.4	179.4						
SEER				4.1	4.4	4.1	4.23	4.13	4.27	4.1	4.57	4.18	4.43	4.38	4.42	4.55	4.2	4.55	5.57	4.56	4.56	4.55	4.55								
Cooling capacity	Nom.	kW		76	105	124	150	165	181	201	204	231	249	266	290	312	330	331	398	444	488	534	579	638							
Power input	Cooling Nom.	kW		33.7	40.3	53	65.9	73	73.2	84.6	91.9	89	99.9	115	119	129	122	140	147	181	197	230	244	251							
Capacity control	Method			Step																											
		Minimum capacity		%	50	38	50	25	38	21	19	50	17	25	24	14	13	33	19	17	15	14	12	11	17						
EER				2.27	2.61	2.34	2.28	2.26	2.48	2.37	2.21	2.6	2.49	2.31	2.44	2.41	2.7	2.35	2.71	2.45	2.48	2.32	2.37	2.55							
IPLV				4.67	4.97	4.5	4.63	4.74	4.64	4.91	4.66	4.93	4.27	4.51	4.82	4.7	5	4.72	4.81	4.92	4.93	5.04	5.03	5.01							
Dimensions	Unit	Height	mm	1,801		1,822		1,801		1,822														2,540							
		Width	mm							1,204												2,236									
		Length	mm	2,120	2,660	3,570		3,180	4,170	3,780				2,326		3,226			4,126			5,025	5,874								
Weight	Unit	kg		691	777	821	1,028	994	1,187	1,179	1,194	1,815	1,842	2,004	2,289	2,317	2,434	2,345	2,824	3,066	3,223	3,484	3,918	4,279							
		Operation weight		kg	696	783	830	1,035	1,006	1,198	1,190	1,210	1,826	1,853	2,020	2,308	2,336	2,454	2,364	2,852	3,094	3,251	3,526	3,960	4,321						
Water heat exchanger	Type			Braze plate																											
		Water volume		l	5	6	9	7	12	11	16				11	16	19	20	19	28			42								
		Water flow rate	Cooling Nom.	l/s	3.7	5	5.9	7.2	7.9	8.7	9.6	9.7	11	11.9	12.7	13.9	14.9	15.7	15.8	19	21.2	23.3	25.5	27.6	30.4						
		Water pressure drop	Cooling Nom.	kPa	24.6	32.2	23.8	58.5	37.5	41.6	49.9	36.8	64.5	73.5	59.9	42.1	47.8	71.7	53.2	50.4	61.1	72.7	58.9	68	81						
Air heat exchanger	Type			Microchannel																											
Compressor	Type			Scroll compressor																											
		Quantity		2		4		2		4		2		4		3		4		3		4		5		6					
Fan	Type			Direct propeller																											
		Quantity		4		6		8		10						4		5		6		5		7		8		9		11	
		Air flow rate	Nom.	l/s	4,929	7,396	11,352		9,838	14,202		12,325	17,064			21,330		25,596	21,330	29,862	34,128		38,394	46,926							
Speed		rpm	1,200						780																						
Sound power level	Cooling Nom.	dBA		78.6	82.5	84.1	81.6	86.3	83.9	85.2	87.8	87	87.2	87.5	88.2	88.3	89.1	88.4	89.8	90.4	90.5	91	91.8								
Sound pressure level	Cooling Nom.	dBA		61.2	64.7	66.4	63.3	68.3	65.3	66.6	69.4	68.1	68.2	68.5	68.7	68.8	69.6	68.9	69.8	69.9	70.5	70.6	71.1								
Refrigerant	Type/GWP			R-32/675																											
		Charge		kg	7.5	8.5	13	11	14.5	13	19			25.5	25	26	24	34.5	36	41	42	46.5	52.5								
		Circuits	Quantity	1		2		1		2		1		2		1		2		1		2									
Piping connections	Evaporator water inlet/outlet (OD)		76.1		88.9		76.1		88.9		76.1		88.9		76.1		88.9		76.1		88.9		114.3								
Unit	Starting current	Max	A	213	313	324	284	462	384	395	498	410	420	546	573	583	588	594	636	681	719	763	801	843							
			Running current	Cooling Nom.	A	62	71	87	115	119	123	139	151	165	189	202	216	202	231	245	298	324	378	402	414						
				Max	A	73	86	96	143	132	156	167	168	182	193	216	243	254	258	265	307	351	389	433	471	513					
Power supply	Phase/Frequency				3~/50																										

# Air cooled scroll chiller, high efficiency, standard/low sound

- > First R-32 air cooled chiller with Scroll compressors in the market
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > One or two truly independent refrigerant circuits for outstanding reliability
- > MicroTech 4 controller with superior control logic and easy interface
- > Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- > Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- > Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- > Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XSB



EWAT-B-XLB

Cooling Only			EWAT-B-XSB/XLB																									
			085	115	145	180	185	200	220	230	250	280	300	310	320	360	370	430	470	540	600	660	700					
Space cooling	A Condition 35°C Pdc		kW																									
	ηs,c		%																									
	ηs,c + VFDFAN		%																									
SEER			4.25 4.65 4.45 4.38 4.47 4.4 4.5 4.31 4.47 4.59 4.6 4.5 4.34 4.48 4.56 4.55 4.56 4.61 4.64 4.58																									
SEER + VFDFAN			- 4.62 - 4.48 4.68 4.44 4.68 4.79 4.83 4.69 4.53 4.6 4.57 6.64 4.57 4.75 4.84																									
Cooling capacity	Nom.		kW																									
	Power input		kW																									
Capacity control	Method		Step																									
	Minimum capacity		%																									
EER			3.05 3.12 3.23 3.14 2.87 3.06 3.03 3.21 3.12 3.2 3.13 3.313 3.06 3.11 3.06 3.11 3.09 3.07 3.12 3.14 3.1																									
IPLV			4.83 5 4.82 4.65 4.74 4.67 4.72 4.6 4.69 4.78 4.86 4.77 4.79 4.38 4.7 4.8 4.9 4.8 4.79 4.82 4.77																									
EER + VFDFAN			- 3.13 - 3.05 3.02 3.19 3.11 3.19 3.12 3.05 3.1 3.08 3.07 3.11 3.13 3.09																									
IPLV + VFDFAN			- 5.11 - 4.87 4.97 5 5.02 5.14 4.95 4.93 4.97 4.96 4.95 4.92 4.71 5.05 5.08 5.12 5.1																									
Dimensions	Unit	Height	mm																									
		Width	mm																									
	Length	mm																										
		Weight (XSB)		kg																								
Weight (XLB)	Unit		kg																									
	Operation weight		kg																									
Water heat exchanger	Type		Brazed plate																									
	Water volume		l																									
	Water flow rate Cooling		l/s																									
	Water pressure drop		kPa																									
Air heat exchanger	Type		Microchannel																									
	Compressor		Scroll compressor																									
Fan	Quantity		2 4 2 4 2 4 3 4 3 4 3 4 5 6																									
	Type		Direct propeller																									
	Air flow rate Nom.		l/s																									
	Speed		rpm																									
Sound power level (XSB)	Cooling		dB(A)																									
	Sound power level (XLB)		dB(A)																									
	Sound pressure level (XSB)		dB(A)																									
	Sound pressure level (XLB)		dB(A)																									
Refrigerant	Type/GWP		R-32/675																									
	Charge		kg																									
	Circuits		Quantity																									
Piping connections	Evaporator water inlet/outlet (OD)		mm																									
	Unit	Starting current		A																								
Running current		Cooling	A																									
		Max	A																									
Power supply	Phase/Frequency		Hz																									
			3~/50																									

# Air cooled scroll chiller, high efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XRB

Cooling Only		EWAT-B-XRB																				
		085	115	145	180	185	200	220	230	250	280	300	310	320	360	370	430	470	540	600	660	700
Space cooling	A Condition 35°C Pdc	kW																				
	ηs,c	%																				
SEER		4.13 4.56 4.24 4.5 4.19 4.74 4.55 4.3 4.5 4.74 4.72 4.65 4.42 4.59 4.48 4.62 4.55 4.65 4.76 4.71																				
Cooling capacity	Nom.	kW																				
Power input	Cooling Nom.	kW																				
Capacity control	Method	Step																				
	Minimum capacity	%																				
EER		2.66 2.79 2.89 2.84 2.36 2.69 2.58 2.84 2.73 2.87 2.72 2.76 2.63 2.71 2.67 2.69 2.64 2.76 2.77 2.72																				
IPLV		4.74 5.1 4.76 5.04 4.72 5.05 4.97 4.86 4.91 5.08 4.78 4.94 4.62 5.04 4.95 4.88 4.72 4.96 5.04 5.07 5.08																				
Dimensions	Unit	mm																				
	Height	1,801 1,822 2,540 1,822																				
	Width	mm																				
Weight	Unit	kg																				
	Operation weight	kg																				
	Water heat exchanger	Type	Brazed plate																			
Air heat exchanger	Water volume	l																				
	Water flow rate Cooling Nom.	l/s																				
	Water pressure drop	kPa																				
Compressor	Type	Microchannel																				
	Quantity	2 4 2 4 2 4 3 4 3 4 5 6																				
Fan	Type	Direct propeller																				
	Quantity	6 8 10 4 10 4 5 6 7 8 9 10 12 13 14																				
	Air flow rate Nom.	l/s																				
Sound power level	Cooling Nom.	dBA																				
	Sound pressure level	dBA																				
Refrigerant	Type/GWP	R-32/675																				
	Charge	kg																				
	Circuits	Quantity																				
Piping connections	Evaporator water inlet/outlet (OD)	mm																				
Unit	Starting current	A																				
	Running current	A																				
	Phase/Frequency	Hz																				

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DV3P

Heating & Cooling		EWYA-D		009DV3P		011DV3P		014DV3P		016DV3P		
Space cooling	A Condition 35°C Pdc	kW		9.35		11.6		12.8		14.0		
	η <sub>s,c</sub>	%		222		229		226		221		
SEER				5.62		5.79		5.71		5.59		
Space heating	Average climate water outlet 35°C	General	SCOP	4.82		4.73		4.70		4.69		
				Seasonal space heating eff. class		A+++						
Cooling capacity	Nom.	kW		9.35 (1) / 9.10 (2)		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Heating capacity	Nom.	kW		9.37 (3) / 9.00 (4)		10.6 (3) / 9.82 (4)		12.0 (3) / 12.5 (4)		16.0 (3) / 16.0 (4)		
Power input	Cooling	Nom.	kW		2.79 (1) / 1.71 (2)		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
	Heating		kW		1.91 (3) / 2.43 (4)		2.18 (3) / 2.68 (4)		2.46 (3) / 3.42 (4)		3.53 (3) / 4.56 (4)	
Capacity control	Method		Variable (inverter)									
EER			3.35 (1) / 5.34 (2)		3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)			
COP			4.91 (3) / 3.71 (4)		4.83 (3) / 3.66 (4)		4.87 (3) / 3.64 (4)		4.53 (3) / 3.51 (4)			
Dimensions	Unit	Height	mm		870							
		Width	mm		1,380							
		Length	mm		460							
Weight	Unit	kg		147								
Water heat exchanger	Type	Plate heat exchanger										
	Water volume	l		2								
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler										
Compressor	Type	Hermetically sealed swing inverter compressor										
	Quantity	1										
Fan	Type	Propeller fan										
	Quantity	1										
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	63		70		85		85.0	
	Heating	Nom.	m <sup>3</sup> /min	48.0		55.8		70.4		69.0		
Sound power level	Cooling	Nom.	dB(A)		65.5		67.0		70.4		69.0	
Sound pressure level	Cooling	Nom.	dB(A)		44.0		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43							
		Heating	Min.~Max.	°CDB	-25~25							
	Water side	Cooling	Min.~Max.	°CDB	5~22							
		Heating	Min.~Max.	°CDB	9~60							
Refrigerant	Type/GWP	R-32/675.0										
	Control	Electronic expansion valve										
	Circuits	Quantity	1									
Refrigerant charge	Per circuit	kg		3.80								
	Per circuit	TCO <sub>2</sub> Eq		2.6								
Unit	Running current	Max	A		30.8							
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/230							

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C)

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DW1P

Heating & Cooling		EWYA-D		009DW1P		011DW1P		014DW1P		016DW1P		
Space cooling	A Condition 35°C Pdc	kW		9.35		11.6		12.8		14.0		
	η <sub>s,c</sub>	%		222		229		226		221		
SEER				5.62		5.79		5.71		5.59		
Space heating	Average climate water outlet 35°C	General	SCOP	4.82		4.73		4.70		4.69		
				Seasonal space heating eff. class		A+++						
Cooling capacity	Nom.	kW		9.35 (1) / 9.10 (2)		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Heating capacity	Nom.	kW		9.37 (3) / 9.00 (4)		10.6 (3) / 9.82 (4)		12.0 (3) / 12.5 (4)		16.0 (3) / 16.0 (4)		
Power input	Cooling	Nom.	kW		2.79 (1) / 1.71 (2)		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
	Heating		kW		1.91 (3) / 2.43 (4)		2.18 (3) / 2.68 (4)		2.46 (3) / 3.42 (4)		3.53 (3) / 4.56 (4)	
Capacity control	Method		Variable (inverter)									
EER			3.35 (1) / 5.34 (2)		3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)			
COP			4.91 (3) / 3.71 (4)		4.83 (3) / 3.66 (4)		4.87 (3) / 3.64 (4)		4.53 (3) / 3.51 (4)			
Dimensions	Unit	Height	mm		870							
		Width	mm		1,380							
		Length	mm		460							
Weight	Unit	kg		147								
Water heat exchanger	Type	Plate heat exchanger										
	Water volume	l		2								
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler										
Compressor	Type	Hermetically sealed swing inverter compressor										
	Quantity	1										
Fan	Type	Propeller fan										
	Quantity	1										
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	63		70		85		85.0	
Sound power level	Cooling	Nom.	dB(A)		65.5		67.0		69.0		69.0	
			dB(A)		44.0		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43							
		Heating	Min.~Max.	°CDB	-25~25							
	Water side	Cooling	Min.~Max.	°CDB	5~22							
		Heating	Min.~Max.	°CDB	9~60							
Refrigerant	Type/GWP	R-32/675.0										
	Control	Electronic expansion valve										
	Circuits	Quantity	1									
Refrigerant charge	Per circuit		kg		3.80							
	Per circuit		TCO <sub>2</sub> Eq		2.6							
Unit	Running	Max	A		14.0							
	current											
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400							

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C)

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DW1P-H-

Heating & Cooling		EWYA-D		009DW1P-H-		011DW1P-H-		014DW1P-H-		016DW1P-H-		
Space cooling	A Condition 35°C Pdc	kW		9.35		11.6		12.8		14.0		
	ηs,c	%		222		229		226		221		
SEER				5.62		5.79		5.71		5.59		
Space heating	Average climate water outlet 35°C	General	SCOP	4.82		4.73		4.70		4.69		
			Seasonal space heating eff. class	A+++								
Cooling capacity	Nom.	kW		9.35 (1) / 9.10 (2)		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Heating capacity	Nom.	kW		9.37 (3) / 9.00 (4)		10.6 (3) / 9.82 (4)		12.0 (3) / 12.5 (4)		16.0 (3) / 16.0 (4)		
Power input	Cooling	Nom.	kW		2.79 (1) / 1.71 (2)		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
	Heating	Nom.	kW		1.91 (3) / 2.43 (4)		2.18 (3) / 2.68 (4)		2.46 (3) / 3.42 (4)		3.53 (3) / 4.56 (4)	
Capacity control	Method	Variable (inverter)										
EER				3.35 (1) / 5.34 (2)		3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)		
COP				4.91 (3) / 3.71 (4)		4.83 (3) / 3.66 (4)		4.87 (3) / 3.64 (4)		4.53 (3) / 3.51 (4)		
Dimensions	Unit	Height	mm		870							
		Width	mm		1,380							
		Length	mm		460							
Weight	Unit	kg		147								
Water heat exchanger	Type	Plate heat exchanger										
	Water volume	l		2								
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler										
Compressor	Type	Hermetically sealed swing inverter compressor										
	Quantity	1										
Fan	Type	Propeller fan										
	Quantity	1										
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	63		70		85		85.0	
	Heating	Nom.	m <sup>3</sup> /min	48.0		55.8		70.4		69.0		
Sound power level	Cooling	Nom.	dB(A)		65.5		67.0		70.4		69.0	
Sound pressure level	Cooling	Nom.	dB(A)		44.0		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43							
		Heating	Min.~Max.	°CDB	-25~25							
	Water side	Cooling	Min.~Max.	°CDB	5~22							
		Heating	Min.~Max.	°CDB	9~60							
Refrigerant	Type/GWP	R-32/675.0										
	Control	Electronic expansion valve										
	Circuits	Quantity	1									
Refrigerant charge	Per circuit	kg		3.80								
	Per circuit	TCO2Eq		2.6								
Unit	Running current	A		14.0								
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400								

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C)

# Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EWYA

More details and final information can be found by scanning or clicking the QR codes.



EWYA-DV3P-H-

Heating & Cooling		EWYA-D	009DV3P-H-	011DV3P-H-	014DV3P-H-	016DV3P-H-	
Space cooling	A Condition 35°C Pdc	kW	9.35	11.6	12.8	14.0	
	η <sub>s,c</sub>	%	222	229	226	221	
SEER			5.62	5.79	5.71	5.59	
Space heating	Average climate water outlet 35°C	General SCOP	4.82	4.73	4.70	4.69	
		Seasonal space heating eff. class	A+++				
Cooling capacity	Nom.	kW	9.35 (1) / 9.10 (2)	11.6 (1) / 11.5 (2)	12.8 (1) / 12.7 (2)	14.0 (1) / 15.3 (2)	
Heating capacity	Nom.	kW	9.37 (3) / 9.00 (4)	10.6 (3) / 9.82 (4)	12.0 (3) / 12.5 (4)	16.0 (3) / 16.0 (4)	
Power input	Cooling	Nom.	2.79 (1) / 1.71 (2)	3.56 (1) / 2.17 (2)	4.06 (1) / 2.51 (2)	4.58 (1) / 3.24 (2)	
	Heating	Nom.	1.91 (3) / 2.43 (4)	2.18 (3) / 2.68 (4)	2.46 (3) / 3.42 (4)	3.53 (3) / 4.56 (4)	
Capacity control	Method		Variable (inverter)				
EER			3.35 (1) / 5.34 (2)	3.26 (1) / 5.31 (2)	3.16 (1) / 5.04 (2)	3.06 (1) / 4.74 (2)	
COP			4.91 (3) / 3.71 (4)	4.83 (3) / 3.66 (4)	4.87 (3) / 3.64 (4)	4.53 (3) / 3.51 (4)	
Dimensions	Unit	Height	mm				
		Width	mm				
		Length	mm				
Weight	Unit	kg	147				
Water heat exchanger	Type		Plate heat exchanger				
	Water volume	l	2				
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler				
Compressor	Type		Hermetically sealed swing inverter compressor				
	Quantity		1				
Fan	Type		Propeller fan				
	Quantity		1				
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	63	70	85
	Heating	Nom.	m <sup>3</sup> /min	48.0	55.8	70.4	85.0
Sound power level	Cooling	Nom.	dB(A)	65.5	67.0	70.4	69.0
Sound pressure level	Cooling	Nom.	dB(A)	44.0	47.7	50.8	51.0
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43		
		Heating	Min.~Max.	°CDB	-25~25		
	Water side	Cooling	Min.~Max.	°CDB	5~22		
		Heating	Min.~Max.	°CDB	9~60		
Refrigerant	Type/GWP		R-32/675.0				
	Control		Electronic expansion valve				
	Circuits	Quantity	1				
Refrigerant charge	Per circuit	kg	3.80				
	Per circuit	TCO <sub>2</sub> Eq	2.6				
Unit	Running current	Max	A	30.8			
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230				

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C)



Infinitely flexible  
choice in heat pumps

# EWYT-B

## Multi scroll heat pumps with R-32 refrigerant

- ✓ Top class efficiency, SEER up to 4,92 and SCOP up to 4,06
- ✓ Low environmental impact thanks to R-32 refrigerant
- ✓ Dedicated Scroll Compressors for hot water production up 60°C
- ✓ The Global Warming Potential (GWP) of R-32 refrigerant is 675, which is only one third compared to commonly used refrigerant R-410
- ✓ The low GWP R-32 refrigerant falls into category class A2L in ISO817 and it can be safely used in many applications including chilled water systems
- ✓ As a single component refrigerant, R-32 is also easier to recycle and reuse another environmental plus in its favour
- ✓ Wide capacity range: 80 – 650 kW
- ✓ Optimized Copper -Aluminium Coils improving performances and de-frosting operation
- ✓ Silver and Gold efficiency versions
- ✓ 3 sound configurations
- ✓ 2 different layouts: Parallel Coil and Double V Coil
- ✓ One or Two independent refrigerant circuits
- ✓ Full compatibility with Daikin on Site
- ✓ Extensive option lists
- ✓ Fan speed modulation option (VFD)

## Connectivity

### Daikin on Site

Fully compatible with Daikin on Site cloud based platform that allows a number of advanced functionalities including:

- > Remote monitoring
- > System optimization
- > Preventive maintenance
- > Remote access with one click via LAN or 4G LTE router

### Connection to Intelligent Chiller Manager

Daikin can offer the Intelligent Chiller Manager option, allowing energy optimisation of the system and, when necessary, full customization of the control solutions to the specific installation's needs even in case of more complex installation.

- > High number of units
- > Cooling and Heating mode
- > Peripheral controls





## Layouts & Range overview

### Parallel coils



Silver Efficiency	75-193 kW 82-213 kW	1 circuits
Gold Efficiency	80-206 kW 86-218 kW	
Silver Efficiency	189-230 kW 209-256 kW	2 circuits
Gold Efficiency	206-250 kW 215-261 kW	

### Double-V coils



Silver Efficiency	270-570 kW 300-627 kW	2 circuits
Gold Efficiency	294-630 kW 306-650 kW	

## Extensive option lists Including new options:

### Partial heat recovery

Introduction of condensation control allowing to maintain heat recovery capacity at lower ambient temperatures with unit operating at full capacity

### Buffer tank

Unit mounted buffer tank available all across the range for plug and play solution.

### VFD pumps and variable flow control

- > Variable pump speed control via external 0-10 volt signal
- > "Thermostat on" and "thermostat off" pump speed management
- > Variable primary flow control


### Master/Slave supplied as standard

Master/Slave functionality allowing to manage up to 4 units on the same system without the need of external control devices.

### Fan Silent Mode

The parallel coil units and units with VFD option are standardly equipped with Fan Silent Mode, which reduces fan velocity and therefore unit sound emission on scheduled time bands, enhancing comfort during night operation.

### Pumping energy

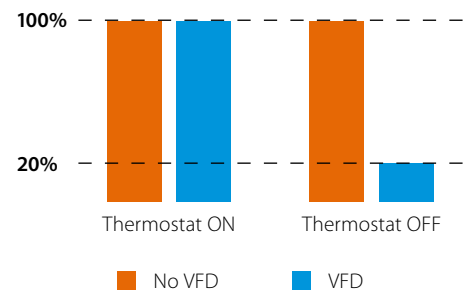

# Air cooled multi-scroll heat pump, standard efficiency, standard/low sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-SS



EWYT-B-SL

Heating & Cooling			EWYT-B-SS/SL																																	
			085	105	135	175	205	215	235	255	300	340	390	430	490	540	590	630	300-VDFDAN	340-VDFDAN	390-VDFDAN	430-VDFDAN	490-VDFDAN	540-VDFDAN	590-VDFDAN	630-VDFDAN										
SEER			3.9	3.98	3.9	4.01	3.96	3.9	3.96	3.9	3.99	4.1	3.99	4	4.23	4.17	4.25	4.16	4.28	4.16	4.12	4.37	4.35	4.29	4.38											
Space heating	Average climate water outlet 35°C	General SCOP	3.34	3.41	3.36	3.40	3.37	3.40	3.34	3.29	3.27	3.28	3.35	3.33	3.37	3.35	3.38	3.37	3.38	3.39	3.46	3.44	3.47	3.46	3.50	3.47										
	Seasonal space heating eff. class		A+																																	
Cooling capacity	Nom.	kW	75	98	120	153	189	193	212	230	270	317	350	375	434	482	531	570	270	317	350	375	434	482	531	570										
Heating capacity	Nom.	kW	82.24	106.24	132.23	169.8	209.28	213.33	236.16	256.09	300.01	342.79	389.93	432.79	486.98	541.54	591.29	627.45	300.01	342.79	389.93	432.79	486.98	541.54	591.29	627.45										
Power input	Cooling	Nom.	28	36.6	44.6	57.8	71.3	72.1	78.7	86.4	102	117	132	147	171	192	206	219	102	117	133	147	171	192	207	219										
	Heating	Nom.	28.16	36.5	45.26	58.94	72.36	73.82	82.07	86.96	104.12	116.23	135.61	150.48	166.78	185.15	201.91	214.4	104.41	116.59	136.09	150.96	167.26	185.62	202.51	215										
Capacity control	Method		Step																																	
	Minimum capacity	%	50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17	22	19	17	25	22	19	18	17										
EER			2.69	2.68	2.7	2.65	2.66	2.67	2.69	2.67	2.65	2.69	2.63	2.55	2.54	2.51	2.57	2.6	2.64	2.69	2.62	2.54	2.53	2.5	2.56	2.59										
COP			2.921	2.911	2.922	2.881	2.892	2.89	2.877	2.945	2.882	2.949	2.875	2.876	2.92	2.925	2.928	2.927	2.873	2.94	2.865	2.867	2.911	2.917	2.92	2.918										
IPLV			4.43	4.4	4.32	4.28	4.33	4.36	4.31	4.35	4.2	4.31	4.2	4.31	4.46	4.52	4.44	4.53	4.35	4.67	4.45	4.54	4.68	4.71	4.73	4.8										
Dimensions	Unit	Height	1,800																																	
		Width	1,195																																	
		Length	2,225 2,825 3,425 4,350 4,025 4,950 3,225 4,125 5,025 3,225 4,125 5,025																																	
Weight (SS)	Unit	kg	955	1,065	1,165	1,320	1,500	1,800	1,825	2,100	2,250	3,180	3,190	3,180	3,370	4,267	2,100	2,250	3,180	3,190	3,180	3,370	4,267													
	Operation weight	kg	962	1,072	1,172	1,327	1,511	1,811	1,839	2,114	2,270	3,200	3,210	3,207	3,397	4,302	4,308	2,114	2,270	3,200	3,209.71	3,207.27	3,397.27	4,302.37	4,308.08											
Weight (SL)	Unit	kg	985	1,095	1,195	1,350	1,530	1,830	1,855	2,260	2,410	3,340	3,350	3,340	3,530	4,427	2,260	2,410	3,340	3,190	3,180	3,370	4,267													
	Operation weight	kg	992	1,102	1,202	1,357	1,541	1,841	1,869	2,274	2,430	3,360	3,370	3,367	3,557	4,462	4,468	2,274	2,430	3,360	3,209.71	3,207.27	3,397.27	4,302.37	4,308.08											
Water heat exchanger	Type		Plate heat exchanger																																	
	Water volume	l	7 11 14 20 27 35 41 14 20 27 35 41																																	
	Water flow rate	Cooling Nom.	l/s	3.6	4.7	5.8	7.3	9	9.2	10.1	11	12.9	15.1	16.7	17.9	20.7	23	25.3	27.2	12.9	15.1	16.7	17.9	20.7	23	25.3	27.2									
	Water pressure drop	Cooling Nom.	kPa	14.9	24.1	35.1	54	45	46.4	55.1	45.1	60.2	49.2	58.8	66.7	58.7	71.2	58.3	66.1	60.2	49.2	58.8	66.7	58.7	71.2	58.3	66.1									
Air heat exchanger	Type		High efficiency fin and tube type																																	
Compressor	Type		Scroll compressor																																	
	Quantity	2 4 2 4 5 6 4 5 6																																		
Fan	Type		Direct propeller																																	
	Quantity	4 6 8 10 12 5 6 8 10 5 6 8 10																																		
	Air flow rate	Nom.	l/s	6,888	10,809	14,412	13,777	17,220	17,221	20,664	28,003	33,604	46,854	45,830	44,806	57,288	56,008	28,003	33,604	46,854	45,830	44,806	57,288	56,008												
	Speed	rpm	1,360 900																																	
Sound power level (SS)	Cooling	Nom.	84	87	89	91	90	92	91	92	94	95	96	96.3	96.6	96.8	97.5	97.8	94	94.9	95.9	96.3	96.6	96.8	97.5	97.8										
Sound power level (SL)	Cooling	Nom.	83	85	87	88	89	89	91	92	93	92.9	93	93.9	90.8	91.6	92.8	92.9	93	93.9	90.8	91.6	92.8	92.9	93	93.9										
Sound pressure level (SS)	Cooling	Nom.	66	69	71	73	71	74	72	73	74	75	76	76.3	76.6	76.8	77.1	77.4	74.5	75.4	75.9	76.3	76.6	76.8	77.1	77.4										
Sound pressure level (SL)	Cooling	Nom.	65	67	69	70	69	70	71	72	73	72.9	73	73.5	71.3	72.1	72.8	72.9	73	73.5	71.3	72.1	72.8	72.9	73	73.5										
Refrigerant	Type		R-32																																	
	Charge	kg	11 19 27 35 43 27.5 42 71 85.5 100 27.5 42 71 85.5 100																																	
	Circuits	Quantity	1 2 1 2																																	
Piping connections	Evaporator water inlet/outlet (OD)		88.9 114.3 88.9 114.3																																	
Unit	Starting current	Max	A	211.0	327.0	343.0	464.0	408.0	495.0	425.0	439.0	564.0	598.0	636.0	666.0	712.0	757.0	795.0	825.0	564	598	636	666	712	757	795	825									
	Running current	Cooling Nom.	A	54.0	66.0	76.0	99.0	125.0	123.0	133.0	146.0	174.0	198.0	227.0	253.0	291.0	328.0	353.0	372.0	175	198	228	253	292	329	354	373									
Unit	Running current	Max	A	68.0	85.0	101.0	131.0	166.0	163.0	183.0	197.0	232.0	266.0	304.0	334.0	379.0	425.0	463.0	493.0	232	266	304	334	379	425	463	493									
Power supply	Phase/Frequency/Voltage		Hz/V 3~/50/400																																	

# Air cooled multi-scroll heat pump, standard efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-SR

Heating & Cooling				EWYT-B-SR																																			
				085	105	135	175	205	215	235	255	300	340	390	430	490	540	590	630																				
SEER				3.82	3.93	3.87	3.96	3.92	3.82	3.83	3.84	4.18	4.37	4.21	4.19	4.49	4.46	4.52																					
Space heating	Average climate water outlet 35°C	General	SCOP	3.35	3.40	3.37	3.42	3.44	3.43	3.32	3.33	3.42	3.49	3.57	3.65	3.60	3.67	3.66																					
			Seasonal space heating eff. class	A+																																			
Cooling capacity	Nom.			kW	74	96	119	150	186	189	209	226	265	311	344	368	424	470	519	557																			
Heating capacity	Nom.			kW	80.91	105.24	131.02	167.11	207.27	209.99	233.05	251.28	295.81	335.24	384.62	426.79	477.49	528.73	581.03	615.34																			
Power input	Cooling	Nom.		kW	28.7	37.4	45.5	59.5	73.2	74.3	80.7	88.8	102	117	131	147	172	195	207	221																			
	Heating	Nom.		kW	27.99	36.24	44.84	58.45	71.9	73.28	81.39	86.29	102.09	113.54	132.02	144.34	160.28	178.33	194.13	206.57																			
Capacity control	Method			Step																																			
	Minimum capacity			%	50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17																			
EER				2.56	2.58	2.61	2.53	2.54	2.55	2.59	2.55	2.59	2.64	2.61	2.5	2.46	2.41	2.5	2.51																				
COP				2.891	2.904	2.922	2.859	2.883	2.866	2.863	2.912	2.898	2.953	2.913	2.957	2.979	2.965	2.993	2.979																				
IPLV				4.36	4.24	4.3	4.38	4.29	4.28	4.26	4.29	4.69	4.58	4.61	4.78	4.89	4.82	4.91																					
Dimensions	Unit	Height	mm	1,800												2,514																							
		Width	mm	1,195												2,282																							
		Length	mm	2,225	2,825	3,425	4,350	4,025	4,950	3,225			4,125			5,025																							
Weight	Unit			kg	985	1,095	1,195	1,350	1,530	1,830	1,855	2,260	2,410	3,340	3,350	3,340	3,530	4,427																					
	Operation weight			kg	992	1,102	1,202	1,357	1,541	1,841	1,869	2,274	2,430	3,360	3,370	3,367	3,557	4,462	4,468																				
Water heat exchanger	Type			Plate heat exchanger																																			
	Water volume			l	7				11				14				20				27				35				41										
	Water flow rate	Cooling	Nom.	l/s	3.5	4.6	5.7	7.2	8.9	9	10	10.8	12.7	14.8	16.4	17.5	20.2	22.4	24.8	26.6																			
	Water pressure drop	Cooling	Nom.	kPa	14.4	23.4	34.2	52.2	43.5	44.8	53.5	43.6	58.1	47.6	57	64.4	56.3	67.8	56	63.4																			
Air heat exchanger	Type			High efficiency fin and tube type																																			
Compressor	Type			Scroll compressor																																			
	Quantity			2				4				2				4				5				6															
Fan	Type			Direct propeller																																			
	Quantity			4				6				8				10				12				5				6				8				10			
	Air flow rate	Cooling	Nom.	l/s	6,026	9,483	12,644	12,052	15,064	15,065	18,078	23,608	28,330	39,446	38,610	37,774	48,262	47,216																					
	Speed			rpm	1,200												780																						
Sound power level	Cooling	Nom.		dB(A)	78	82	84	85	84	87	86	87	88	89	89.3	89.4	89.5	90.4	90.5																				
Sound pressure level	Cooling	Nom.		dB(A)	60	64	65	67	66	68	67	68	69	69.3	69.4	69.5	70	70.1																					
Refrigerant	Type			R-32																																			
	Charge			kg	11	19	27	35	43	27.5	42	71	85.5	100																									
	Circuits	Quantity		1				2				1				2																							
Piping connections	Evaporator water inlet/outlet (OD)			88.9																114.3																			
Unit	Starting current	Max		A	211.0	327.0	343.0	464.0	408.0	495.0	425.0	439.0	564.0	598.0	636.0	666.0	712.0	757.0	795.0	825.0																			
	Running current	Cooling	Nom.	A	55.0	67.0	77.0	101.0	128.0	126.0	136.0	149.0	173.0	196.0	224.0	251.0	292.0	330.0	353.0	373.0																			
Unit	Running current	Max		A	68.0	85.0	101.0	131.0	166.0	163.0	183.0	197.0	232.0	266.0	304.0	334.0	379.0	425.0	463.0	493.0																			
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400																																		

# Air cooled multi-scroll heat pump, high efficiency, standard/low sound



EWYT-B-XS/XL

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input

More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-XS



EWYT-B-XL

Heating & Cooling				EWYT-B-XS/XL																																	
				085	115	135	175	215	215	235	265	310	350	400	440	500	560	600	630	650	VDFAN 310	VDFAN 350	VDFAN 400	VDFAN 440	VDFAN 500	VDFAN 560	VDFAN 600	VDFAN 630	VDFAN 650								
SEER				4.24	4.38	4.24	4.45	4.41	4.21	4.4	4.13	4.57	4.67	4.54	4.57	4.72	4.71	4.7	4.69	4.4	4.66	4.81	4.68	4.63	4.86	4.83	4.83	4.82	4.58								
Water heating	Average climate water outlet 35°C	General	SCOP	A+																																	
Seasonal space heating eff. class																																					
Cooling capacity	Nom.			80	104	126	166	206	229	250	288	328	370	406	467	519	560	597	610	288	328	370	406	467	519	560	597	610									
Heating capacity	Nom.			85.86	111.02	133.18	176.29	214.81	218.29	239.37	280.83	305.53	349.96	400.64	443.87	500.13	555.95	598.67	633.91	649.7	305.53	349.96	400.64	443.87	500.13	555.95	598.67	633.91	649.7								
Power input	Cooling	Nom.		26.3	35.1	42.1	56.6	68	71.8	74.9	83.4	93.9	107	122	134	158	177	193	204	207	94.1	107	123	135	158	177	193	205	207								
	Heating	Nom.		26.06	33.19	39.11	51.68	62.55	64.91	69.49	76.15	88.61	101.7	117.65	127.8	147.3	165.04	179.94	191.66	203.16	88.81	101.93	117.94	128.08	147.63	165.38	180.33	192.05	203.95								
Capacity control	Method			Step																																	
	Minimum capacity		%	50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17	22	19	17	25	22	19	18	17										
EER				3.03	2.95	2.99	2.93	3.03	2.86	3.06	3	3.06	3.05	3.02	3.01	2.95	2.93	2.9	2.92	2.95	3.06	3.05	3.01	2.95	2.92	2.9	2.91	2.94									
COP				3.295	3.345	3.405	3.411	3.434	3.363	3.444	3.425	3.448	3.441	3.405	3.473	3.395	3.369	3.327	3.308	3.198	3.44	3.433	3.397	3.466	3.388	3.362	3.32	3.301	3.186								
IPLV				4.75	4.69	4.87	4.72	4.87	4.64	4.94	4.96	5	5.1	5.08	5.05	4.66	4.97	5.16	5.13	5.16	5.3	5.29	5.22	5.16	4.99												
Dimensions	Unit	Height	mm	1,800																2,514																	
		Width	mm	1,195																2,282																	
		Length	mm	2,825	3,425	4,025	5,550	4,625	6,150	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825												
Weight (XS)	Unit		kg	1,080	1,140	1,220	1,400	2,000	1,600	2,300	2,350	2,830	3,080	3,650	3,750	4,206	4,296	4,760	4,860	2,830	3,080	3,650	3,750	4,206	4,296	4,760	4,860										
	Operation weight		kg	1,091	1,151	1,231	1,416	2,035	1,616	2,335	2,385	2,865	3,115	3,685	3,812	4,268	4,366	4,830	4,930	2,865	3,115	3,685.37	3,811.88	4,267.88	4,366.2	4,830.2	4,930.2										
Weight (XL)	Unit		kg	1,110	1,170	1,250	1,430	2,030	1,610	2,330	2,380	3,140	3,240	3,810	3,910	4,366	4,456	4,920	5,020	3,140	3,240	3,650	3,750	4,206	4,296	4,760	4,860										
	Operation weight		kg	1,121	1,181	1,261	1,446	2,065	1,626	2,365	2,415	3,175	3,275	3,845	3,972	4,428	4,526	4,990	5,090	3,175	3,275	3,685.37	3,811.88	4,267.88	4,366.2	4,830.2	4,930.2										
Water heat exchanger	Type			Plate heat exchanger																																	
	Water volume		l	11	16	35	16	35	35	62	70	35	62	70																							
	Water flow rate	Cooling	Nom.	l/s	3.8	5	6	7.9	9.8	10.9	11.9	13.7	15.7	17.7	19.4	22.3	24.7	26.7	28.5	29.1	13.7	15.7	17.7	19.4	22.3	24.7	26.7	28.5	29.1								
	Water pressure drop	Cooling	Nom.	kPa	9.49	15.2	21.5	20.1	12	29.6	14.6	17.1	22	27.9	34.7	23.6	30.4	33.6	38.6	43.2	45	22	27.9	34.7	23.6	30.4	33.6	38.6	43.2	45							
Air heat exchanger	Type			High efficiency fin and tube type																																	
Compressor	Type			Scroll compressor																																	
	Quantity			2	4	2	4	4	5	6	4	5	6																								
Fan	Type			Direct propeller																																	
	Quantity			6	8	10	14	12	16	7	8	10	12	14	7	8	10	12	14	29,593	33,820	43,351	42,276	52,021	50,730	60,692	59,186	78,410									
	Air flow rate	Nom.	l/s	9,039	12,644	12,052	15,065	21,090	18,078	24,104	29,593	33,820	43,351	42,276	52,021	50,730	60,692	59,186	78,410																		
	Speed		rpm	1,200														900																			
Sound power level (XS)	Cooling	Nom.	dB(A)	81	86	88	90	89	91	90	91	92	93	94.2	94.8	95.3	95.6	96.1	96.5	98.4	92.4	93.4	94.2	94.8	95.3	95.6	96.1	96.5	98.4								
Sound power level (XL)	Cooling	Nom.	dB(A)	79.5	82.6	84.1	86.2	85.4	87.5	86.4	87.1	86	87	88	88.2	88.9	89	89.6	89.7	95.3	86.4	87.1	88	88.2	88.9	89	89.6	89.7	95.3								
Sound pressure level (XS)	Cooling	Nom.	dB(A)	63	67	69	71	69	73	70	71	72	73	73.8	74.4	74.5	74.8	75	75.4	77.3	72.4	73.4	73.8	74.4	74.5	74.8	75	75.4	77.3								
Sound pressure level (XL)	Cooling	Nom.	dB(A)	61	64	65	67	66	68	66	67	66	67	67.6	67.8	68.1	68.2	68.5	68.6	74.2	66.4	67.1	67.6	67.8	68.1	68.2	68.5	68.6	74.2								
Refrigerant	Type			R-32																																	
	Charge		kg	17	29.4	29.8	34.5	50	44	50	55	70	85	100	114.5	129	143.5	158	70	85	100	114.5	129	143.5	158												
	Circuits	Quantity		1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2								
Piping connections	Evaporator water inlet/outlet (OD)			88.9														114.3																			
Unit	Starting current	Max	A	213.0	329.0	343.0	465.0	412.0	497.0	429.0	443.0	562.0	594.0	629.0	659.0	710.0	755.0	790.0	820.0	841.0	572	606	644	674	728	773	811	841									
	Running current	Cooling	Nom.	A	53.0	65.0	75.0	99.0	122.0	123.0	132.0	143.0	170.0	192.0	215.0	236.0	276.0	313.0	338.0	358.0	361.0	170	193	216	237	277	313	339	359	362							
Unit	Running current	Max	A	70.0	87.0	101.0	133.0	170.0	165.0	186.0	201.0	229.0	262.0	297.0	327.0	370.0	423.0	458.0	488.0	509.0	240	274	312	342	395	441	479	509									
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400																																	

# Air cooled multi-scroll heat pump, high efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



EWYT-B

More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-XR

Heating & Cooling				EWYT-B-XR																	
				085	115	135	175	215	215	235	265	310	350	400	440	500	560	600	630	650	
				-XRA2	-XRA2	-XRA2	-XRA2	-XRA2	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	-XRA1	
SEER				4.21	4.37	4.21	4.41	4.16	4.42	4.43	4.13	4.74	4.8	4.82	4.63	4.92	4.89	4.83	4.79	4.72	
Water heating	Average climate water outlet 35°C	General	SCOP	3.66	3.71	3.65	3.83	3.74	3.70	3.82	3.81	4.06	4.01	3.95	4.03	3.99	4.04	4.00	3.98	3.88	
	Seasonal space heating eff. class			A+																	
Cooling capacity	Nom.	kW		79	103	124	164	203	204	227	247	282	321	364	398	458	507	548	583	600	
Heating capacity	Nom.	kW		84.9	110.32	132.02	174.14	216.57	213.48	237.57	256.58	301.04	344.8	395.81	438.23	494.13	549.6	588.57	620.71	637.4	
Power input	Cooling	Nom.	kW	26.6	35.4	42.6	57.4	72.9	68.8	75.7	84.4	95.2	109	124	136	160	180	196	208	203	
	Heating	Nom.	kW	25.87	32.94	38.82	51.3	64.51	62.13	68.99	75.49	86.32	99.1	114.46	124.61	143.5	161.2	175.33	186.93	193.22	
Capacity control	Method	Step																			
	Minimum capacity	%		50	38	50	38	50	19	17	25	22	19	17	25	22	19	18	17		
EER				2.98	2.9	2.92	2.86	2.79	2.97	3	2.93	2.96	2.95	2.93	2.91	2.85	2.81	2.8	2.94		
COP				3.282	3.349	3.401	3.394	3.357	3.436	3.443	3.399	3.487	3.479	3.458	3.517	3.443	3.409	3.357	3.321	3.299	
IPLV				4.73	4.67	4.65	4.67	4.86	4.82	4.62	4.92	5.12	5.26	5.12	5.34	5.32	5.22	5.23	5.19		
Dimensions	Unit	Height	mm	1,800								2,514									
		Width	mm	1,195								2,282									
		Length	mm	2,825	3,425	4,025	4,625	5,550	6,150		4,125	5,025		5,925	6,825						
Weight	Unit	kg		1,110	1,170	1,250	1,430	1,610	2,030	2,330	2,380	3,140	3,240	3,810	3,910	4,366	4,456	4,920	5,020		
		Operation weight		kg	1,121	1,181	1,261	1,446	1,626	2,065	2,365	2,415	3,175	3,275	3,845	3,972	4,428	4,526	4,990	5,090	
Water heat exchanger	Type	Plate heat exchanger																			
	Water volume	l		11			16			35			62			70					
	Water flow rate	Cooling	Nom.	l/s	3.8	4.9	5.9	7.8	9.7	10.8	11.8	13.4	15.3	17.3	19	21.8	24.2	26.2	27.8	28.6	
	Water pressure drop	Cooling	Nom.	kPa	9.33	14.9	21.1	19.6	28.9	11.8	14.3	16.8	21.2	26.8	33.5	22.7	29.2	32.2	37.1	41.4	43.7
Air heat exchanger	Type	High efficiency fin and tube type																			
Compressor	Type	Scroll compressor																			
	Quantity	2			4			5			6										
Fan	Type	Direct propeller																			
	Quantity	6	8	10	12	14	16	7	8	10	12	14									
	Air flow rate	Nom.	l/s	8,298	11,630	11,064	13,830	16,596	19,362	22,128	25,074	28,656	36,808	35,820	44,169	42,984	51,531	50,148	66,104		
Sound power level	Cooling	Nom.	dBA	77	81	83	85	87	84	85	86	84	85.2	85.5	86.2	86.3	86.9	87.1	91.6		
	Sound pressure level	Cooling	Nom.	dBA	59	63	65	67	68	65	66	64	64.8	65.1	65.4	65.5	65.8	66	70.5		
Refrigerant	Type	R-32																			
	Charge	kg		17	29.4	29.8	34.5	44	50	55	70	85	100	114.5	129	143.5	158				
	Circuits	Quantity	1								2										
Piping connections	Evaporator water inlet/outlet (OD)	88.9																			
Unit	Starting current	Max	A	213.0	329.0	343.0	465.0	497.0	412.0	429.0	443.0	572.0	606.0	644.0	674.0	728.0	773.0	811.0	841.0		
	Running current	Cooling	Nom.	A	53.0	65.0	75.0	100.0	124.0	123.0	133.0	145.0	169.0	192.0	214.0	237.0	276.0	315.0	339.0	360.0	353.0
Unit	Running current	Max	A	70.0	87.0	101.0	133.0	165.0	170.0	186.0	201.0	240.0	274.0	312.0	342.0	395.0	441.0	479.0	509.0		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																	



# Air cooled mini inverter heat pump

- › Top product in terms of energy efficiency and operation range
- › All capacities available in 2 versions: standard version and version with OP10 option (no freeze up of water when not in operation thanks to the water piping heater tape)
- › Easy ‚plug and play‘ installation
- › Amongst the most quiet units in the market (63dBA - sound power)
- › Single phase power supply and low starting currents make the unit ideal for residential applications
- › Weight reduced with 20% compared with the previous models.
- › Built-in Hydraulic kit: no buffer tank required, standard inverter driven pump, main flow sensor and switch included.
- › Standard wired remote control enables setting of different set points (cooling, heating, water leaving temperature) or based on outdoor conditions (weather dependent control). It has an alarm history, night time noise reduction function and is language based.



More details and final information can be found by scanning or clicking the QR codes.



EWYQ-BVP

Heating & Cooling					EWYQ-BVP	004	005	006	008
Cooling capacity	Nom.			kW	4.00/4.01	4.93/5.07	5.88/6.07	7.95/8.23	
Heating capacity	Nom.			kW	4.11/3.96	4.99/4.99	6.14/6.12	8.08/8.44	
	Max.			kW	5.1	6.0	-	-	
Power input	Cooling	Nom.		kW	1.27/0.840	1.61/1.12	1.87/1.13	2.57/1.65	
	Heating	Nom.		kW	1.19/0.860	1.46/1.09	1.75/1.28	2.31/1.84	
Capacity control	Method				Variable(inverter)				
EER					3.14/4.80	3.06/4.51	3.15/5.35	3.10/4.99	
COP					3.44/4.61	3.41/4.58	3.51/4.77	3.49/4.59	
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	155	159	158	165	
					SCOP	3.90	4.03	4.21	
					Seasonal space heating eff. class	A++			
Dimensions	Unit	HeightxWidthxDepth			735x1,090x350		997x1,160x380		
Weight	Unit				83		106		
Water heat exchanger	Type				Braze plate				
	Water flow rate	Cooling	Nom.	l/min	11.5/11.5	14.1/14.5	16.9/17.4	22.8/23.6	
		Heating	Nom.	l/min	11.8/11.4	14.3/14.3	17.6/17.5	23.2/24.2	
Water volume				1	2				
Air heat exchanger	Type				Cross fin coil/Hi-X tubes and chromate coated waffle louvre fins			Cross fin coil/Hi-X tubes and PE coated waffle louvre fins	
Compressor	Type				Hermetically sealed swing compressor				
	Quantity				1				
Fan	Type				Propeller fan				
	Quantity				1				
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	53		72		
Heating		Nom.	m <sup>3</sup> /min	47.0		46.6	49.3		
Sound power level	Cooling	Nom.	dBA	63	64	69			
	Heating	Nom.	dBA		65				
Sound pressure level	Cooling	Nom.	dBA	48	49	52	53		
	Heating	Nom.	dBA						
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43		10~46		
		Heating	Min.~Max.	°CDB	-20~25		-15~25		
	Water side	Cooling	Min.~Max.	°CDB		5~22			
		Heating	Min.~Max.	°CDB		15~55			
Refrigerant	Type/GWP				R-410A/2,088			R-410A/2,087.5	
	Control				Electronic expansion valve				
	Circuits	Quantity			1				
Refrigerant charge	Per circuit				kg	2.10		2.70	
	Per circuit				TCO2Eq	4.4		5.6	
Water circuit	Piping connections diameter				1" MBSP				
Unit	Starting current		Max	A	15.7		19.9		
	Running current		Max	A	15.7		19.9		
Power supply	Phase/Frequency/Voltage				1N~/50/230				

# Air cooled scroll inverter heat pump, split version

- > Hydronic module for indoor installation eliminating the need for glycol
- > Ideal for colder climates as the lack of glycol will allow for high efficiencies
- > Compact dimensions and limited pipework allow for installation in very restricted spaces
- > Easy transportation as separate units will fit in an elevator



Heating & Cooling				SEHVX20BAW/ SERHQ20BAW1	SEHVX32BAW/ SERHQ32BAW1	SEHVX40BAW/ SERHQ20BAW1+SERHQ20BAW1	SEHVX64BAW/ SERHQ32BAW1+SERHQ32BAW1	
Cooling capacity	Nom.		kW	21.2 (1)	31.8 (1)	42.3 (1)	63.3 (1)	
Heating capacity	Nom.		kW	20.8 (2)	31.2 (2)	41.7 (2)	62.7 (2)	
Power input	Cooling	Nom.	kW	7.47 (1)	12.7 (1)	15.1 (1)	25.5 (1)	
	Heating	Nom.	kW	6.76 (2)	10.6 (2)	13.7 (2)	21.4 (2)	
EER				2.84	2.5	2.8	2.48	
COP				3.07	2.93	3.03	2.93	
Space heating	Average climate water outlet 35°C	General	SCOP ns (Seasonal space heating efficiency)	%	3.93	3.53	3.80	3.53
					154	138	149	138
					Seasonal space heating eff. class		A++	A+

Unit for indoor installation				SEHVX20BAW	SEHVX32BAW	SEHVX40BAW	SEHVX64BAW	
Dimensions	Unit	Height	mm	1,573				
		Width	mm	766				
		Length	mm	396				
Weight	Unit		kg	97.0	105	137	153	
	Packed unit		kg	109	117	149	165	
Water side Heat exchanger	Type	Braze plate						
	Water volume		l	3	5	6	9	
	Water flow rate	Cooling	Nom.	l/min	60 (3)	90 (3)	120 (3)	181 (3)
Heating		Nom.	l/min	60 (2)	90 (2)	120 (2)	181 (2)	
Sound power level	Nom.		dB(A)	63.0				
Operation range	Cooling	Ambient	Min.-Max.	°CDB -5~43				
		Water side	Min.-Max.	°CDB 5 (4)~20				
	Heating	Ambient	Min.-Max.	°CDB -15~35				
		Water side	Min.-Max.	°CDB 25~50				
Refrigerant	Type / GWP	R-410A / 2,087.5						
	Circuits	Quantity	1				2	
Water circuit	Control			Electronic expansion valve				
	Piping connections diameter			1-1/4" (female)		2" (female)		
	Piping			1-1/4"				
	Water pressure drop	Cooling	Nom.	kPa	17 (7)	24 (7)	19 (7)	29 (7)
		Total water volume			l	4.2 (8)	5.8 (8)	7.9 (8)
Power supply	Phase/Frequency/Voltage			Hz/V 3N~/50/400				

Outdoor Unit				SERHQ20BAW1	SERHQ32BAW1
Dimensions	Unit	Height	mm	1,680	
		Width	mm	765	
		Length	mm	930	1,240
Weight	Unit		kg	240	316
	Packed unit		kg	273	356
Compressor	Quantity			2	3
Fan	Type	Hermetically sealed scroll compressor			
	Type	Axial			
	Quantity			1	2
Air flow rate	Cooling	Nom.	m³/min	185	233
		Heating	Nom.	m³/min	185


(1) Cooling: entering evaporator water temp. 12°C; leaving evaporator water temp. 7°C; ambient air temp. 35°C (2) Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) (3) Condition: Ta 35°C - LWE 7°C ( DT = 5°C) (4) Water can be used above 5°C. Between 0°C and 5°C a 30% glycol solution (propylene or ethylene) has to be used. Between 0°C and -10°C a 40% glycol solution (propylene or ethylene) has to be used (see installation manual and information related to OPZL option) (5) Excluding water volume in the unit. In most applications this minimum water volume will have a satisfying result. In critical processes or in rooms with a high heat load though, extra water volume might be required. Refer to operation range for more info. (6) Excluding the water volume in the unit. This volume will guarantee sufficient defrost energy for all applications, however, this volume can be multiplied by 0,66 if the heating sepoint is ≥ 45° C (eg. Fan coils) (7) This is PD between inlet & outlet connections of unit. It includes the water side heat exchanger pressure drop. (8) Including piping + PHE; excluding expansion vessel





# Air cooled screw inverter heat pump, standard efficiency, standard sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control

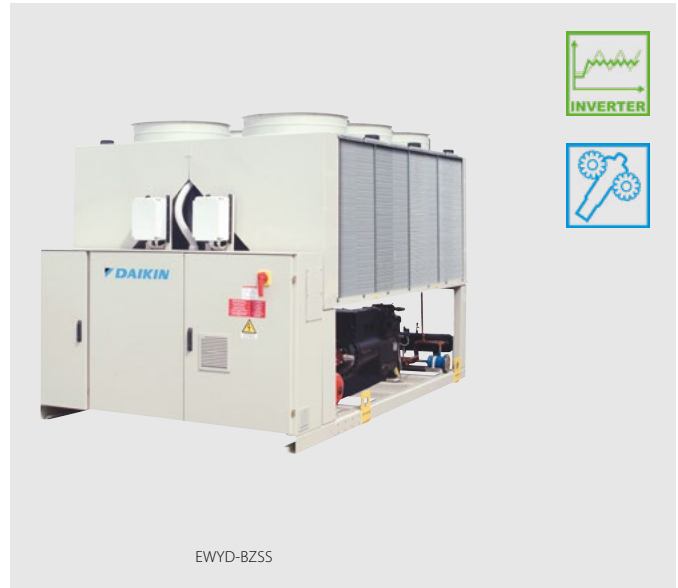

EWYD-BZSS

More details and final information can be found by scanning or clicking the QR codes.




EWYD-BZSS

Heating & Cooling				EWYD-BZSS	250	270	290	320	340	370	380	410	440	460	510	530	570
SEER															4.57	4.55	
Space heating	Average climate water outlet 35°C	General	SCOP		3.21		3.20		3.21			3.20					
Cooling capacity	Nom.			kW	253	272	291	323	337	363	380	411	433	455	515	533	569
Heating capacity	Nom.			kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33
Power input	Cooling	Nom.		kW	91.3	101	110	117	125	135	144	154	165	163	183	189	217
	Heating	Nom.		kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14
Capacity control	Method				Stepless												
	Minimum capacity			%	13.0									9.0	9		
EER					2.77	2.70	2.65	2.75	2.69	2.68	2.63	2.66	2.62	2.79	2.81		2.62
ESEER					3.93	3.92	3.89	3.95	3.89	3.90	3.82	3.91	3.89	4.18			
COP					2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971
IPLV					4.58	4.62		4.75	4.64	4.71	4.67	4.73	4.69	4.85	4.89	4.85	4.77
Dimensions	Unit	Height	mm	2,335										2,280	2,280		
		Width	mm	2,254										2,254			
		Length	mm	3,547			4,428			5,329			6,659	6,659			
Weight	Unit			kg	3,410	3,455	3,500	3,870		3,940	4,010	4,390		5,015	5,495	5,735	
	Operation weight			kg	3,550	3,595	3,640	4,010		4,068	4,138	4,518		5,255	5,724	5,964	5,953
Water heat exchanger	Type				Single pass shell & tube										Shell and tube		
	Water volume			l	138					128			240		229		218
	Water flow rate	Cooling	Nom.	l/s	12.1	13.0	13.9	15.5	16.2	17.4	18.2	19.7	20.8	21.8	24.7	25.5	27.3
		Heating	Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0			
Water pressure drop	Cooling	Nom.	kPa	40	46	44	50	55	60	65	74	80	47	68.4	46.5	52.4	
	Heating	Nom.	kPa	30	35	52	37	40	45	51	59	64	42				
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler										High efficiency fin and tube type		
Compressor	Type				Single screw compressor												
	Quantity				2										3	3	
Fan	Type				Direct propeller												
	Quantity				6			8			10		12	12			
	Air flow rate Nom.			l/s	31,729	31,422	31,115	42,306		42,337	41,487	52,882		63,458	62,640	61,652	48,191
	Speed			rpm	900												
Sound power level	Cooling	Nom.	dBA	101					102		104	103.6					
Sound pressure level	Cooling	Nom.	dBA	82					83		84	83.7					
Operation range	Air side	Cooling	Min.~Max.	°CDB	-10~45							---					
		Heating	Min.~Max.	°CDB	-10~20							---					
	Water side	Cooling	Min.~Max.	°CDB	-8~15							---					
		Heating	Min.~Max.	°CDB	35~55							---					
Refrigerant	Type/GWP				R-134a/1,430										R-134a/-		
	Charge			kg											141	147	
Refrigerant charge	Circuits			Quantity	2										3	3	
	Per circuit			kg	43.0	44.0	43.0	46.0	46.5		47.0	50.0		47.0			
	Per circuit			TCO2eq	61.5	62.9	61.5	65.8	66.5		67.2	71.5		67.2			
Piping connections	Evaporator water inlet/outlet (OD)				139.7mm										219.1mm		
Unit	Starting current	Max		A	150			181	204			224	238	245	327	355	344
		Running current	Cooling	Nom.	A	137	150	164	176	188	202	214	229	244	246	298	310
	Max		A	211			212	254		288		316	336	329	433	474	458
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										3~/50/400		



# Air cooled screw inverter heat pump, standard efficiency, low sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control

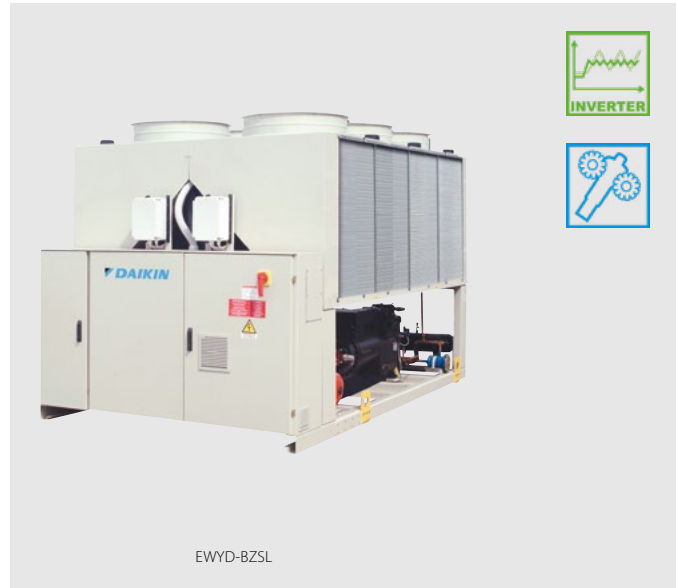

More details and final information can be found by scanning or clicking the QR codes.



EWYD-BZSL

Heating & Cooling				EWYD-BZSL	250	270	290	320	330	360	370	400	430	450	510	530	570					
SEER															4.56	4.6	4.55					
Space heating	Average climate water outlet 35°C	General	SCOP		3.21		3.20		3.21			3.20										
Cooling capacity	Nom.			kW	247	265	290	315	330	353	370	401	423	446	503	519	569					
Heating capacity	Nom.			kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33					
Power input	Cooling	Nom.		kW	89.5	99.5	110	115	123	134	144	151	163	158	178	185	217					
	Heating	Nom.		kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14					
Capacity control	Method	Stepless																				
	Minimum capacity			%	13.0										9.0	9						
EER					2.76	2.66	2.62	2.75	2.68	2.64	2.57	2.66	2.59	2.83	2.82	2.8	2.62					
ESEER					4.06	4.04	4.03	4.17	4.09	4.04	4.01	4.06	4.02	4.18								
COP					2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971					
IPLV					4.90	4.96	4.91	5.17	5.08	5.12	5.06	5.22	5.13	5.07	5.03	4.99	4.89					
Dimensions	Unit	Height	mm	2,335										2,280								
		Width	mm	2,254										2,254								
		Length	mm	3,547			4,428			5,329			6,659									
Weight	Unit		kg	3,750	3,795	3,840	4,210		4,280	4,350	4,730		5,525	6,005		6,245						
		Operation weight	kg	3,888	3,933	3,978	4,343		4,408	4,478	4,858		5,765	6,234		6,474						
Water heat exchanger	Type	Single pass shell & tube															Shell and tube					
	Water volume		l	138			133			128			240		229		218					
	Water flow rate	Cooling	Nom.	l/s	11.8	12.7	13.9	15.1	15.8	16.9	17.7	19.2	20.3	21.4	24.1	24.9	27.3					
		Heating	Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0								
Water pressure drop	Cooling	Nom.	kPa	38	44	42	48	53	57	62	71	77	45	65.5	44.4	52.4						
	Heating	Nom.	kPa	30	35	52	37	40	45	51	59	64	42									
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler													High efficiency fin and tube type							
Compressor	Type	Single screw compressor																				
	Quantity			2										3	3							
Fan	Type	Direct propeller																				
	Quantity			6			8			10			12		12							
	Air flow rate	Nom.	l/s																48,415	47,732	48,191	
		Cooling	Nom.	l/s	24,432	24,264	24,095	32,576		32,628	32,127	40,720		48,863								
Speed		rpm	700															900				
Sound power level	Cooling	Nom.	dB(A)	94			95						97		97							
Sound pressure level	Cooling	Nom.	dB(A)	76															77		77.2	
Operation range	Air side	Cooling	Min.-Max.	°CDB	-10~45															---		
		Heating	Min.-Max.	°CDB	-10~20															---		
	Water side	Cooling	Min.-Max.	°CDB	-8~-15															---		
		Heating	Min.-Max.	°CDB	35~55															---		
Refrigerant	Type/GWP	R-134a/1,430															R-134a/-					
Charge		kg																141	147			
Refrigerant charge	Circuits	Quantity		2										3		3						
	Per circuit		kg	43.0	44.0	43.0	46.0	46.5		47.0	50.0		47.0									
	Per circuit		TCO2Eq	61.5	62.9	61.5	65.8	66.5		67.2	71.5		67.2									
Piping connections	Evaporator water inlet/outlet (OD)	139.7mm															219.1mm					
Unit	Starting current	Max	A	145	146		176	199			217	231	234	316	344							
		Running current	Cooling	Nom.	A	134	148	163	171	184	199	212	224	240	238	291	305	349				
	Max		A	202	203		243	277			302	322	313	416	458							
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400															3~/50/400			



# EWYD-4Z

Air to water  
Multipurpose unit

4-pipe system solution with full inverter technology  
For independent and simultaneous cooling and heating all year round

## 1

### Top class efficiency

Total Energy Ratio up to 8.8

Full inverter technology:  
the best choice for  
every application

#### Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology

The inverter integrated in the compressor is refrigerant cooled:

- > Safe and robust cooling system, totally independent from outdoor ambient conditions and air quality.
- > Suitable even for aggressive installation such as industrial or desert application.

The volume ratio will change by moving the sliding valves.

**VVR** changes the point at which the gas leaves the compressor, and therefore changes the pressures at discharge which will be optimal at any condition.

## 2

### Easy part load calculation via the tool CSS WEB

Upon defining the design condition in the unit selection page it is possible to calculate the unit performances in every in-between condition with a different load

## 3

### Best solution for simultaneous cooling and heating

Big multipurpose buildings, hotels, hospital are just a few examples of application for multipurpose units

Check on  
**YouTube**

[www.youtube.com/DaikinEurope](http://www.youtube.com/DaikinEurope)

> Daikin EWYD-4Z  
Multipurpose Unit




> Daikin EWYD-4Z  
Multipurpose Unit –  
Behind the scenes



# Air to Water Multipurpose unit

- › Best solution for independent and simultaneous cooling and heating all year round
- › Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology
- › High Efficiency Inverter fans with optimized geometry ensures the best ratio between airflow and power input.
- › Wide operating envelope for cooling and heating with extra capacity in Boosted operation and Rapid Restart functionality

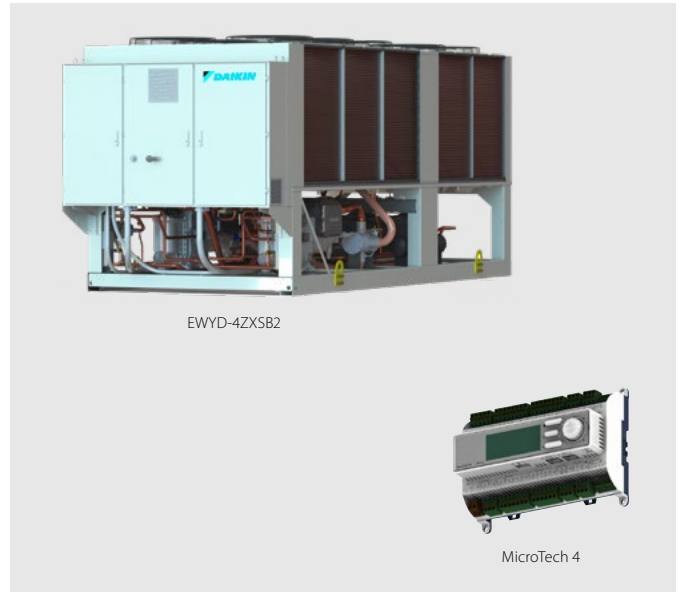

More details and final information can be found by scanning or clicking the QR codes.



EWYD-4ZXS2

Multipurpose		EWYD-4ZXS2									
		400	450	500	550	600	650	700	800		
Air to water – cooling only (1)	Nominal Rated Capacity – Net	kW	402.4	438.4	502.8	523.4	602.4	653.7	702.9	785.7	
	EER – Net		3.17	3.15	3.25	3.08	3.25	3.19	3.37	3.29	
Air to water – heating only (2)	Nom. Rated Capacity – Net	kW	402.7	439.7	503.5	545.2	600.9	654.7	702.4	803.0	
	COP – Net		3.33	3.41	3.45	3.44	3.45	3.38	3.55	3.54	
Water to water – Cooling + heating (3)	Nom. Rated Capacity COOLNG – Net	kW	313.2	351.6	393.9	430.4	479.4	516	553.3	634.4	
	Nom. Rated Capacity HEATING – Net	kW	402.4	449.3	503.4	549.4	608.8	658.3	707.1	808.9	
	TER – Net		8.03	8.19	8.2	8.24	8.4	8.25	8.2	8.27	
Dimensions	Height	mm	2465								
	Width	mm	2285								
	Length	mm	5825			6725			7625		8525
Weight	Unit Weight	kg	6075	6095	6870	6870	7850	8435	9405	9430	
	Operating Weight	kg	6540	6560	7560	7560	8935	9540	10785	10820	
	Cold/Hot side water connections	mm	219.1								
Sound level	Sound Power – Cooling (4)	dB(A)	99	98	99	100	102				
	Sound Pressure – Cooling at 1 m (5)	dB(A)	78	77	78	79	80				
Water heat exchangers	Cold Side	Water Volume	l	126	126	214	214	369	361	468	468
		Water flow rate (1)	l/s	19.3	21.0	24.1	25.1	28.8	31.3	33.6	37.6
		Water pressure drop (1)	kPa	42.0	50.8	40.1	47.8	48.0	34.2	40.7	37.1
	Hot Side	Water Volume	l	126	126	214	214	369	361	468	468
		Water flow rate (2)	l/s	9.1	9.1	13.4	13.4	14.6	19.5	20.8	26.1
		Water pressure drop (2)	kPa	19.4	21.146	24.3	26.334	29	31.6	33.9	38.7
Fan	Quantity	n	10		12		14	16			
	Nominal air flow (1)	l/s	56550		67860		79170	90480			
Compressor	Type		Single screw								
	Oil charge	l	28							38	
	Quantity	n.	2								
Refrigerant circuit	Refrigerant type		R134a								
	Refrigerant charge	kg	198	207	200	219	247	260	328	354	
	Circuits	n.	2								
Power Supply	Phase/Frequency/Voltage	Hz/V	3~/50/400								

Fluid: Water; Fouling factor = 0

(1) Operation in Air to water "Cooling only" mode rated at 35°C ambient temperature, 50% R.H.; Entering water temperature 12°C, Outlet water temperature 7°C.

(2) Operation in Air to water "Heating only" mode rated at 7°C ambient temperature, 85% R.H.; Entering water temperature 40°C, Outlet water temperature 45°C.

(3) Operation in Water to water "Cooling + Heating" mode rated with water flowing on cold and hot heat exchangers determined respectively at conditions (1) and (2) - Chilled water outlet temperature 7°C, Hot water outlet temperature 45°C.

(4) Sound power level are referred to condition (1) for Cooling and (2) for Heating. The data are measured in accordance with ISO 9614 and Eurovent 8/1 for Eurovent certified units.


The certification refers only to the overall sound power level.

(5) Sound pressure is calculated from the sound power level and it is for information only and not considered binding.

All the above data are referred to standard units without options and are subject to change without notice.

# Air to Water Multipurpose unit

- › Best solution for independent and simultaneous cooling and heating all year round
- › Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology
- › High Efficiency Inverter fans with optimized geometry ensures the best ratio between airflow and power input.
- › Wide operating envelope for cooling and heating with extra capacity in Boosted operation and Rapid Restart functionality

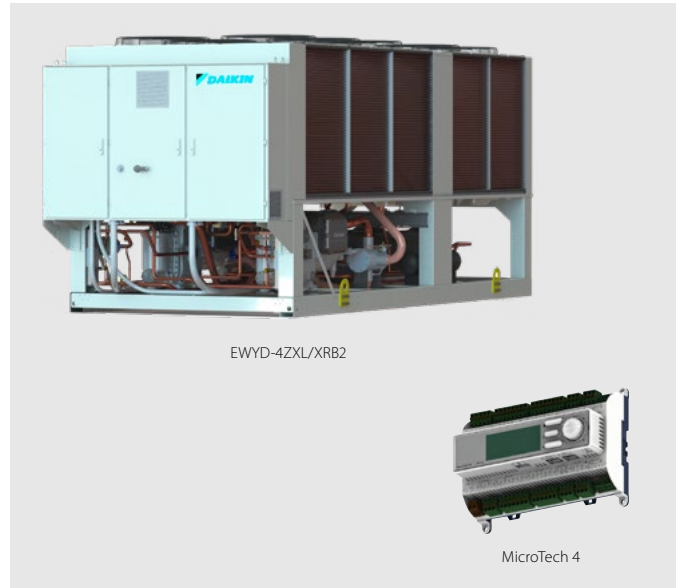

More details and final information can be found by scanning or clicking the QR codes.



EWYD-4ZXR2

Multipurpose		EWYD-4ZXR2		400	450	500	550	600	650	700	800	
Air to water – cooling only (1)	Nominal Rated Capacity – Net	kW	357.9	400.4	451.9	496.2	548.0	596.5	619.1	690.0		
	EER – Net		3.05	3.06	3.12	3.06	3.11	3.07	3.19	3.08		
Air to water – heating only (2)	Nom. Rated Capacity – Net	kW	358.3	398.7	452.2	493.4	550.7	601	620.9	690.8		
	COP – Net		3.48	3.65	3.65	3.63	3.59	3.55	3.67	3.71		
Water to water – Cooling + heating (3)	Nom. Rated Capacity COOLNG – Net	kW	281.5	312.7	351.1	383.1	435.2	473.1	489.3	543.8		
	Nom. Rated Capacity HEATING – Net	kW	361.4	399.5	448.1	487.9	550.5	602.1	625.3	693.3		
	TER – Net		8.04	8.20	8.24	8.31	8.55	8.33	8.19	8.27		
Dimensions	Height	mm	2465									
	Width	mm	2285									
	Length	mm	5825			6725		7625	8525			
Weight	Unit Weight	kg	6240	6260	7035	7035	8015	8600	9690	9715		
	Operating Weight	kg	6705	6725	7725	7725	9100	9705	11075	11110		
	Cold/Hot side water connections	mm	219.1									
Sound level	Sound Power – Cooling (4)	dB(A)	87	86	87		88		90			
	Sound Pressure – Cooling at 1 m (5)	dB(A)				66				68	69	
Water heat exchangers	Cold Side	Water Volume	126		214		369	361	468			
		Water flow rate (1)	l/s	17.1	19.2	21.6	23.7	26.2	28.5	29.6	33.0	
		Water pressure drop (1)	kPa	31.8	37.1	31.7	38.7	39	27	33.7	28.1	
	Hot Side	Water Volume	l	126	126	214	214	369	361	468	468	
		Water flow rate (2)	l/s	17.3	19.2	21.8	23.8	26.6	29.0	30.0	33.3	
		Water pressure drop (2)	kPa	31.8	38.5	27.7	33.6	32	23.8	28.5	24.4	
Fan	Quantity	n	10		12		14	16				
	Nominal air flow (1)	l/s	36110		43332		50554	57776				
Compressor	Type		Single screw									
	Oil charge	l	28							38		
	Quantity	n.	2									
Refrigerant circuit	Refrigerant type		R134a									
	Refrigerant charge	kg	206	207	224	226	248	260	320	348		
	Circuits	n.	2									
Power Supply	Phase/Frequency/Voltage	Hz/V	3~/50/400									

Fluid: Water; Fouling factor = 0

(1) Operation in Air to water "Cooling only" mode rated at 35°C ambient temperature, 50% R.H.; Entering water temperature 12°C, Outlet water temperature 7°C.

(2) Operation in Air to water "Heating only" mode rated at 7°C ambient temperature, 85% R.H.; Entering water temperature 40°C, Outlet water temperature 45°C.

(3) Operation in Water to water "Cooling + Heating" mode rated with water flowing on cold and hot heat exchangers determined respectively at conditions (1) and (2) - Chilled water outlet temperature 7°C, Hot water outlet temperature 45°C.

(4) Sound power level are referred to condition (1) for Cooling and (2) for Heating. The data are measured in accordance with ISO 9614 and Eurovent 8/1 for Eurovent certified units. The certification refers only to the overall sound power level.

(5) Sound pressure is calculated from the sound power level and it is for information only and not considered binding.

All the above data are referred to standard units without options and are subject to change without notice.



# Air cooled screw condensing unit, standard efficiency, standard sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



More details and final information can be found by scanning or clicking the QR codes.



ERAD-E-SS

Cooling only		ERAD-E-SS		120	140	170	200	220	250	310	370	440	490		
Cooling capacity	Nom.	kW		121	144	165	196	219	251	309	370	435	488		
Power input	Cooling	kW		42.1	51.2	57.7	65.6	74.2	77.0	93.8	123	148	161		
Capacity control	Method	Stepless													
	Minimum capacity	%		25.0											
EER				2.88	2.82	2.86	2.99	2.95	3.27	3.30	3.02	2.95	3.02		
Dimensions	Unit	Height	mm	2,273						2,223					
		Width	mm	1,292						2,236					
		Length	mm	2,165		3,065		3,965		3,070					
Weight	Unit	kg		1,584		1,741		1,936		2,679					
	Operation weight	kg		1,617		1,781		1,981		2,756					
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler													
Compressor	Type	Single screw compressor													
	Quantity	1													
Fan	Type	Direct propeller													
	Air flow rate	Nom.	l/s	10,924	10,576	16,386	15,865	21,848	21,153	32,772		31,729			
	Quantity			2		3		4		6					
	Speed	Cooling	Nom.	rpm											
				92.0						93.0		94.0		95.0	
Sound power level	Cooling	Nom.	dBA	74.0						75.0		76.0			
Sound pressure level	Cooling	Nom.	dBA	74.0						75.0		76.0			
Operation range	Saturated suction temp.		°C	-9~12											
	Condenser inlet temp.		°C	-18~48											
Refrigerant	Type / GWP		R-134a / 1,430												
	Circuits		Quantity	1											
Piping connections	Evaporator water inlet/outlet (OD)			76mm						139.7mm					
Unit	Maximum starting current		A	151		195		288		330		410			
	Nominal running current (RLA) Cooling		A	72	88	98	110	125	129	158	204	244	266		
	Maximum running current		A	86	103	119	132	157	164	198	242	284	298		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400											



# Air cooled screw condensing unit, standard efficiency, low sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



More details and final information can be found by scanning or clicking the QR codes.



ERAD-E-SL

Cooling only		ERAD-E-SL		120	140	160	190	210	240	300	350	410	460			
Cooling capacity	Nom.	kW		116	137	159	187	209	243	298	352	409	462			
Power input	Cooling	kW		42.4	52.5	57.7	66.3	73.9	78.1	91.9	122	150	167			
Capacity control	Method	Stepless														
	Minimum capacity	%		25.0												
EER				2.74	2.61	2.75	2.83	3.11	3.24	2.88	2.73	2.76				
Dimensions	Unit	Height	mm	2,273								2,223				
		Width	mm	1,292								2,236				
		Length	mm	2,165		3,065		3,965		3,070						
Weight	Unit	kg		1,684		1,841		2,036		2,789						
	Operation weight	kg		1,717		1,881		2,081		2,886						
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler														
Compressor	Type	Single screw compressor														
	Quantity	1														
Fan	Type	Direct propeller														
	Air flow rate	Nom.	l/s	8,373	8,144	12,560	12,216	16,747	16,288	25,120	24,432					
	Quantity			2		3		4		6						
	Speed	Cooling	Nom.	700												
Sound power level	Cooling	Nom.		89.0		90.0		91.0		92.0		93.0				
Sound pressure level	Cooling	Nom.		71.0		71.0		71.0		73.0		74.0				
Operation range	Saturated suction temp	°C		-9~12												
	Condenser inlet temp	°C		-18~48												
Refrigerant	Type / GWP	R-134a / 1,430														
	Circuits	Quantity		1												
Piping connections	Evaporator water inlet/outlet (OD)			76mm						139.7mm						
Unit	Maximum starting current			A		151		195		288		330		410		
	Nominal running current (RLA)			Cooling	A		73	90	98	112	125	131	155	204	249	275
	Maximum running current			A		83	100	115	128	151	158	189	234	276	290	
Power supply	Phase/Frequency/Voltage			Hz/V		3~/50/400										

# Water cooled scroll heat pump

- › One of the most compact units on the market: 600mm x 600mm x 600mm
- › Low energy consumption
- › Low operating sound level
- › Low refrigerant volume
- › Stainless steel plate heat exchanger
- › Extension possible to 183kW
- › Easy installation and maintenance
- › Remote cooling or heating selection
- › Water/water heat pump, with water reversibility
- › Standard integrated: water filter, flow switch, air purge, pressure ports
- › Advanced  $\mu C^2SE$  controller for direct connection to a Modbus based BMS or to a remote user interface



Product launch for the new Hydrocubes scheduled on April 2022

More details and final information can be found by scanning or clicking the QR codes.




EWQ-KBW1N

Cooling only/Heating only					EWQ-KBW1N	014	025	033	049	064	098	113	128	147	162	177	192			
Space heating	Average climate water outlet 35°C	General	ns (Seasonal space heating efficiency)	%	171	177	186	180	189											
			Seasonal space heating eff. class		A+++															
Cooling capacity	Nom.			kW	13.25	23.9	30.4	47.15	60.98	94	108	122	142	155	169	183				
Power input	Cooling	Nom.		kW	3.15	5.72	7.3	11.42	14.58	22.7	25.8	28.9	33.9	37	40.1	43.2				
Capacity control	Method				Fixed															
	Minimum capacity			%	100			50		25			16							
EER					4.209	4.177	4.164	4.127	4.182	4.17	4.19	4.22	4.18	4.2	4.22	4.24				
IPLV					5.13	5.27	5.41	5.36	5.47	5.36	5.42	5.47	5.36	5.4	5.44	5.47				
Dimensions	Unit	Height		mm	600					1,200			1,800							
		Width		mm						600										
		Depth		mm	600			1,200												
Weight	Unit			kg	120	170	175	310	340	620	650	680	930	960	990	1,020				
	Operation weight			kg	123	175	182	320	353	640	673	707	960	993	1,026	1,060				
Water heat exchanger - evaporator	Type				Brazen plate															
	Water volume			l	1.23	1.93	2.68	4.5	5.93	9	10	12	14	15	16	18				
	Water flow rate	Nom.		l/s	0.64	1.15	1.46	2.26	2.92	4.5	5.2	5.8	6.8	7.4	8.1	8.8				
Water heat exchanger - condenser	Water pressure drop	Cooling	Nom.	kPa	19.6	28.5	25.7	24.3	25.3	24.3	25.2		24.3	25.2						
					Brazen plate															
					Water volume	l	1.83	2.93	4.03	5.45	7.35	10.9	12.8	14.69	16.35	18.25	20.15	22.04		
Water flow rate	Nom.		l/s	0.78	1.41	1.83	2.78	3.61	5.57	6.39	7.21	8.35	9.17	10	10.8					
Compressor	Type	Quantity		kPa	13.2	18.3	18.5	26.9	28.5	26.9	28.5		26.9	28.5						
					Scroll compressor															
					1	2		4			6									
Sound power level	Cooling	Nom.		dBA	64.0	71.0		67.0	74.0	71.0	75.0	77.0	73.0	77.0	78.0	79.0				
					50.0	57.0	53.0	60.0	55.70	59.70	61.70	56.9	60.9	61.9	62.9					
Operation range	Evaporator	Cooling	Min.-Max.	°CDB	-10~20															
					Condenser	Cooling	Min.-Max.	°CDB	20~55											
Refrigerant	Type				R-410A															
	Charge			kg	1.2	2	3.1	4.6	5.6	9.4	10.2	11.2	13.8	14.8	15.8	16.8				
	Circuits	Quantity			1			2			4			6						
Piping connections		Evaporator water inlet/outlet (OD)			G1"			G1" 1/2			2 x 2x G1" 1/2			3 x 3x G1" 1/2						
	Condenser water inlet/outlet (OD)			G1"			G1" 1/2			2 x 2x G1" 1/2			3 x 3x G1" 1/2							
Unit	Starting current	Max		A	61.8	101.9	137.9	117.55	158.63	148.86	189.93	200.09	180.16	221.24	231.39	241.54				
					Running	Cooling	Nom.	A	5.99	9.29	12.98	18.69	26.08	37.37	44.75	52.12	56.06	63.44	70.81	78.18
					current	Max	A	9.47	15.65	20.73	31.31	41.46	62.61	72.76	82.91	93.92	104.07	114.22	124.37	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400															

# Water cooled scroll chiller


## Combination table

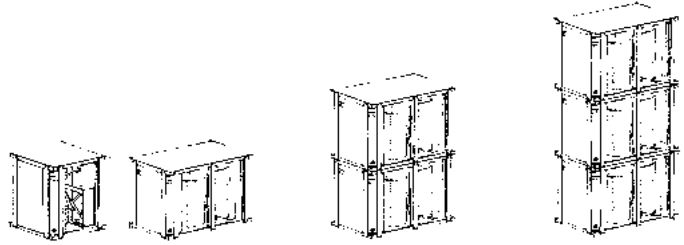

		Single Module					2 x Modules			3 x Modules			
Unit Index		014	025	033	049	064	098	113	128	147	162	177	192
Capacity (kW)		13	24	31	49	64	98	113	128	147	162	177	192
Unit + control factory mounted	EWWQ014KBW1N	1	-	-	-	-	-	-	-	-	-	-	-
	EWWQ025KBW1N	-	1	-	-	-	-	-	-	-	-	-	-
	EWWQ033KBW1N	-	-	1	-	-	-	-	-	-	-	-	-
	EWWQ049KBW1N	-	-	-	1	-	-	-	-	-	-	-	-
	EWWQ064KBW1N	-	-	-	-	1	-	-	-	-	-	-	-
Modular unit (controller available as accessory)	EWWQ049KAW1M	-	-	-	-	-	2	1	-	3	2	1	-
	EWWQ064KAW1M	-	-	-	-	-	-	1	2	-	1	2	3
Controller for modular unit	ECB2MUAW	-	-	-	-	-	1	1	1	-	-	-	-
	ECB3MUAW	-	-	-	-	-	-	-	-	1	1	1	1

Note 1: the above combination table is also valid for standard models with OPZL or OPZH.

Note 2: condensersless versions are only available as single modules only.

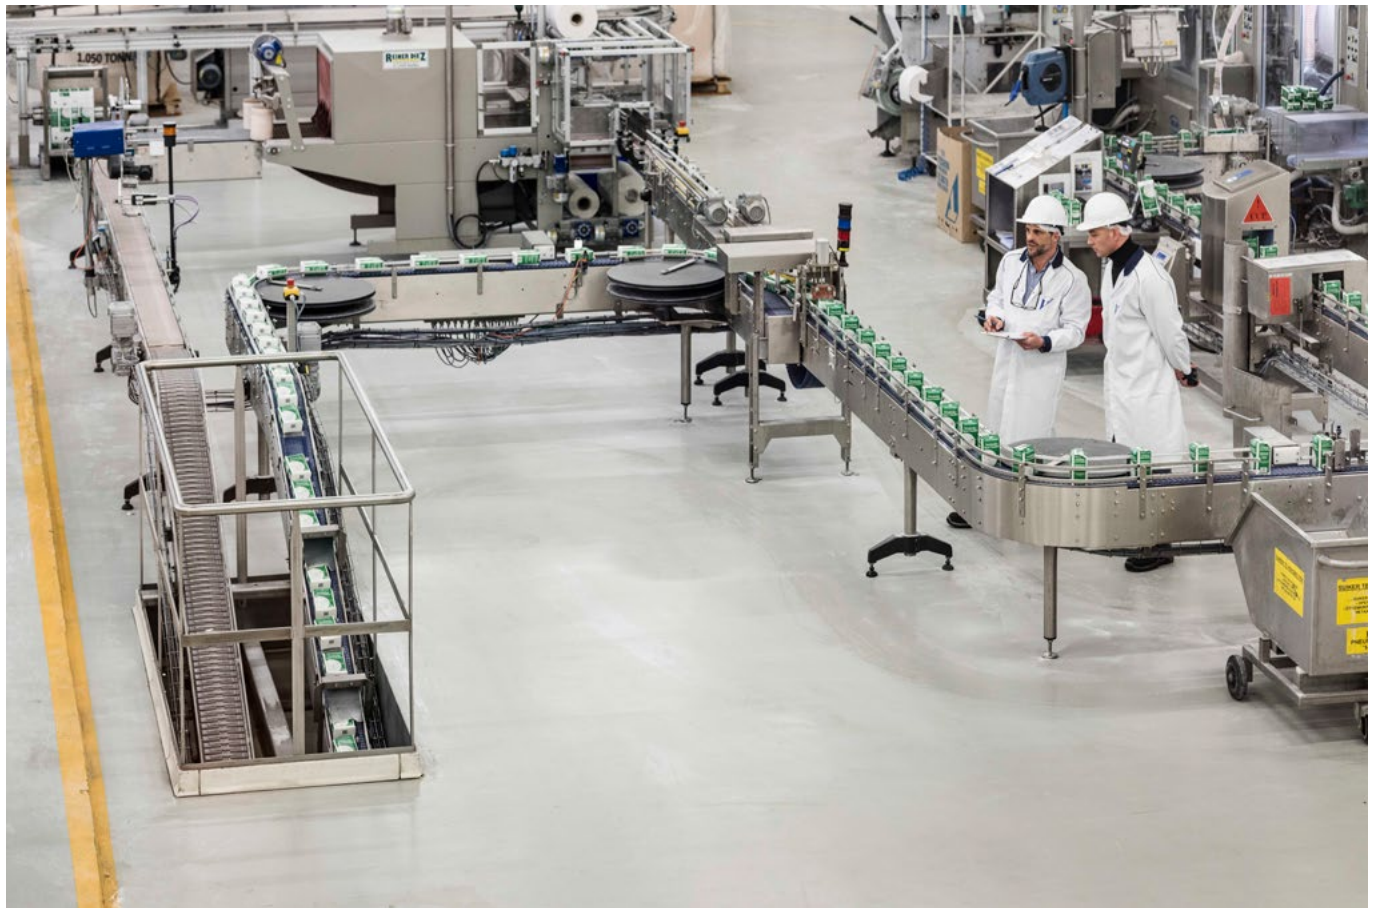

# Water cooled multi-scroll chiller reversing on refrigerant side, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version with reversibility on refrigerant side available, ideal for geothermal applications
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.




EWHQ-G-SS

Heating & Cooling				EWHQ-G-SS												
				100	120	130	150	160	190	210	240	270	340	400		
Cooling capacity	Nom.			kW	87.3	100.0	111	127	141	160	181	208	232	291	352	
Heating capacity	Nom.			kW	112	128	144	162	179	205	233	266	299	375	454	
Capacity control	Method	Step														
	Minimum capacity			%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0	
Power input	Cooling	Nom.			kW	22.4	25.3	28.5	32.0	35.6	41.1	46.0	53.3	59.1	73.7	88.4
	Heating	Nom.			kW	27.0	30.9	35.2	39.3	43.6	50.4	56.6	64.7	72.2	90.3	109
EER						3.90	3.95	3.91	3.96	3.95	3.90	3.93	3.90	3.92	3.95	3.98
COP						4.15	4.16	4.09	4.12	4.11	4.07	4.11	4.10	4.14	4.16	4.18
ESEER						4.70	4.84	4.65	4.86	4.80	4.89	4.86	4.83	4.79	4.90	4.83
IPLV						6.02	6.14	5.66	5.84	5.73	5.84	5.81	5.87	5.71	5.86	5.79
Dimensions	Unit	HeightxWidthxLength		mm	1,066x928x2,432			1,066x928x2,264			1,066x928x2,432			1,186x928x2,432		
Weight	Unit			kg	519	608	728	770	808	838	880	930	941	1,090	1,203	
	Operation weight			kg	558	654	782	830	873	908	995	1,019	1,031	1,202	1,334	
Water heat exchanger - evaporator	Type	Plate heat exchanger														
	Water flow rate	Cooling	Nom.	l/s	4.2	4.8	5.3	6.1	6.7	7.7	8.7	10.0	11.1	13.9	16.9	
		Heating	Nom.	l/s	4.1	4.7	5.2	5.9	6.5	7.4	8.5	9.6	10.9	13.7	16.6	
	Water pressure drop	Cooling	Nom.	kPa	44		35	30	29	31	33	31	38	42	43	
Heating		Nom.	kPa	42		33	28	27	29	32	29	37	41	42		
Water heat exchanger - condenser	Type	Plate heat exchanger														
	Water flow rate	Cooling	Nom.	l/s	6	8	10	12	13	15	17		27	34		
		Heating	Nom.	l/s	5.2	6.0	6.7	7.7	8.5	9.7	10.9	13.7	13.9	17.4	21.1	
	Water pressure drop	Cooling	Nom.	kPa	69		55	49	48	51	54	32	39	66	69	
Heating		Nom.	kPa	73		59	51	50	53	57	33	42	70	73		
Compressor	Type	Scroll compressor														
	Quantity	2														
Sound power level	Cooling	Nom.			dB(A)	80.0	83.0	85.0	87.0	88.0			90.0	92.0	93.0	
	Heating	Nom.			dB(A)	64.0	67.0	69.0	70.0	72.0			74.0	76.0	77.0	
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-8~-15											
		Heating	Min.~Max.	°CDB	-8~-15											
	Condenser	Cooling	Min.~Max.	°CDB	25~55											
		Heating	Min.~Max.	°CDB	25~55											
Refrigerant	Type/GWP	R-410A/2,087.5														
	Circuits	Quantity	1													
Refrigerant charge					kg/TCO <sub>2</sub> Eq	9.0/18.8		10.0/20.9		13.0/27.1	11.0/23.0	13.0/27.1	15.0/31.3		19.0/39.7	
Piping connections	Evaporator water inlet/outlet (OD)				1" 1/2			2" 1/2			3"					
	Condenser water inlet/outlet (OD)				1" 1/2			2" 1/2			3"					
Power supply	Phase/Frequency/Voltage				Hz/V	3~/50/400										
Unit	Starting current	Max		A	204	255	261	308	316	354	368	466	481	640	677	
		Running current	Cooling	Nom.	A	43	46	50	56	63	71	78	88	97	123	148
	Heating		Max	A	59	66	72	80	88	102	116	131	145	183	221	

# Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface

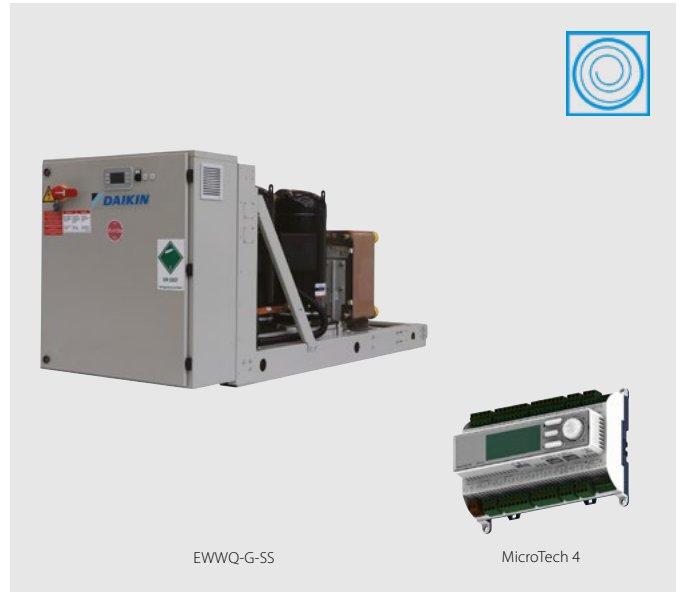

More details and final information can be found by scanning or clicking the QR codes.



EWQ-G-SS

Cooling Only				EWQ-G-SS												
				090	100	120	130	150	170	190	210	240	300	360		
Space cooling	A Condition 35°C Pdc			kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4	
	η <sub>s,c</sub>			%	209.08	215.32	233.52	227.68	233.04	233.36	220.32	235.56	231.84	236.64	211.36	
SEER					5.427	5.583	6.038	5.892	6.026	6.034	5.708	6.089	5.996	6.116	5.484	
Cooling capacity	Nom.			kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4	
Power input	Cooling	Nom.		kW	21.3	24	26.9	30.5	33.9	38.9	43.8	50.74	56.1	70.2	84	
Capacity control	Method			Fixed												
	Minimum capacity			%	50	43	50	44	50	45	50	43	50	40	50	
EER					4.399	4.4	4.424	4.456	4.425	4.424	4.425	4.349	4.387	4.477	4.41	
ESEER					5.51	5.52	5.51	5.53	5.51	5.53	5.52					
IPLV					6.71	6.79	6.22	6.36	6.22	6.32	6.3	6.31	6.1	6.28	6.16	
Dimensions	Unit	Height	mm	1,066												
		Width	mm	928												
		Length	mm	2,432				2,264				2,432				
Weight	Unit			kg	516	606	728	762	795	832	871	921	934	1,083	1,181	
		Operation weight		kg	554.9	652.4	781.6	821.4	859	901.4	945.9	1,009.6	1,023.2	1,194.7	1,311.1	
Water heat exchanger - evaporator	Type			Plate heat exchanger												
	Water volume			l	6	8		10	12	13	15	17		27	34	
	Water flow rate Nom.			l/s	4.5	5.07	5.7	6.51	7.18	8.24	9.28	10.57	11.79	15.06	17.74	
Water heat exchanger - condenser	Type			Plate heat exchanger												
	Water volume			l	6	8		10	12	13	15	17		27	34	
	Water flow rate Nom.			l/s	5.52	6.23	7.05	8.04	8.87	10.17	11.43	13.02	14.53	18.46	21.81	
Compressor	Type			Driven vapour compression												
	Quantity			2												
	Sound power level	Cooling	Nom.	dBA	80.0	83.0	85.0	87.0	88.0			90.0	92.0	93.0		
Sound pressure level	Cooling	Nom.	dBA	64.0	67.0	69.0	70.0	72.0			74.0	76.0		77.0		
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~-15											
		Heating	Min.~Max.	°CDB	-10~-15											
	Condenser	Cooling	Min.~Max.	°CDB	25~55											
		Heating	Min.~Max.	°CDB	25~55											
Refrigerant	Type/GWP			R-410A/2,087.5												
	Charge			kg	10	11			12	15	16	17	19	20		
	Circuits			Quantity	1											
Refrigerant charge	TCO2Eq			20.88	22.96			25.05	31.31	33.40	35.49	39.66	41.75			
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
	Condenser water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
Unit	Starting current Max			A	204	255	261	308	316	354	368	466	481	640	677	
	Running current	Cooling	Nom.	A	42	45	48	54	61	68	76	86	95	118	143	
		Max		A	59	66	72	80	88	102	116	131	145	183	221	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

# Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWQ-L-SS

Cooling only/Heating only				EWQ-L-SS	180	205	230	260	290	330	380
Space cooling	A Condition 35°C Pdc			kW	187.4	215.1	244.3	272.6	303.2	344.5	386.8
	ηs,c			%	211.72	222.72	232.76	230.32	236.76	233.32	224.84
SEER					5.493	5.768	6.019	5.958	6.119	6.033	5.821
Cooling capacity	Nom.			kW	187.4	215.1	244.3	272.6	303.2	344.5	386.8
Power input	Cooling	Nom.		kW	41.7	47.3	53.1	60.2	67.1	77.1	87
Capacity control	Method				Fixed						
	Minimum capacity			%	25	21	25	22	25	23	25
EER					4.494	4.548	4.601	4.528	4.519	4.468	4.446
ESEER					5.54		5.52	5.53	5.54	5.53	5.54
IPLV					6.77	6.84	6.35	6.38	6.31	6.32	6.36
Dimensions	Unit	Height		mm	1,970						
		Width		mm	928						
		Length		mm	2,801						
Weight	Unit			kg	877	1,062	1,285	1,347	1,439	1,498	1,559
		Operation weight		kg	957	1,156	1,401	1,469	1,575	1,641	1,723
Water heat exchanger - evaporator	Type				Plate heat exchanger						
	Water volume			l	35	41	53		65		76
	Water flow rate Nom.			l/s	8.97	10.29	11.69	13.04	14.5	16.48	18.51
	Water pressure drop	Cooling	Nom.	kPa	28	27.6	22.6	28	25.1	32.2	31.9
Water heat exchanger - condenser	Type				Plate heat exchanger						
	Water volume			l	19	22	29		35		41
	Water flow rate Nom.			l/s	11.02	12.66	14.4	16.12	17.9	20.38	22.8
	Water pressure drop	Cooling	Nom.	kPa	72	73	61	49	50	51	55
Compressor	Type				Driven vapour compression						
	Quantity				4						
Sound power level	Cooling	Nom.		dB(A)	83.0	86.0	88.0	90.0	91.0		
	Sound pressure level	Cooling	Nom.		dB(A)	65.0	68.0	70.0	72.0	74.0	73.0
Operation range	Evaporator	Cooling	Min.~Max.		°CDB	-10~-15					
		Heating	Min.~Max.		°CDB	-10~-15					
	Condenser	Cooling	Min.~Max.		°CDB	25~55					
		Heating	Min.~Max.		°CDB	25~55					
Refrigerant	Type/GWP				R-410A/2,087.5						
	Charge			kg	20		22		24		30
	Circuits	Quantity			2						
Refrigerant charge				kg/TCO2Eq	10.0/20.9		11.0/23.0		12.0/25.1		15.0/31.3
Piping connections	Evaporator water inlet/outlet (OD)				3"						
	Condenser water inlet/outlet (OD)				1" 1/2		2" 1/2				
Unit	Starting current	Max		A	263	320	333	388	403	456	484
		Running current	Cooling	Nom.	A	83	89	96	109	121	137
	Max		A	118	131	144	160	175	205	232	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400						

performances according to CSS software 10.27

# Water to water screw heat pump, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWWD-J-SS

Cooling & Heating				EWWD-J-SS	120	140	150	180	210	250	280
Space heating	Average climate water outlet 55°C	General	SCOP		4.03	4.11	4.16	4.17	4.17	4.23	3.83
Cooling capacity	Nom.			kW	120	146	154	177	207	255	284
Heating capacity	Nom.			kW	144	175	190	218	252	308	347
Power input	Cooling	Nom.		kW	28.0	34.0	39.5	45.3	50.4	59.9	70.0
Capacity control	Method				Stepless						
	Minimum capacity			%	25.0						
EER					4.28	4.28	3.91	3.92	4.11	4.26	4.06
COP					5.20		4.84	4.85	5.04	5.17	4.98
IPLV					5.18	5.06		5.05	5.16	5.70	4.88
Dimensions	Unit	Height		mm	1,020						
		Width		mm	913						
		Length		mm	2,684						
Weight	Unit			kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607
		Operation weight		kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675
Water heat exchanger - evaporator	Type				Plate heat exchanger						
	Water volume			l	14	18	14	17	20	26	
	Water flow rate	Cooling	Nom.	l/s	5.7	7.0	7.4	8.5	9.9	12.2	13.6
	Water flow rate	Heating	Nom.	l/s	9.3	11.3	12	13.8	16.1	19.8	22.1
	Water pressure drop	Cooling	Nom.	kPa	15	14	43	40	35	28	34
Water heat exchanger - condenser	Type				Single pass shell and tube						
	Water volume			l	20		23	25	29		32
	Water flow rate	Cooling	Nom.	l/s	7.1	8.6	9.3	10.7	12.4	15.2	17.0
	Water flow rate	Heating	Nom.	l/s	6.9	8.4	9.1	10.5	12.1	14.8	16.7
	Water pressure drop	Cooling	Nom.	kPa	20	13	11		15	17	27
Compressor	Type				Single screw compressor						
	Quantity				1						
Sound power level	Cooling	Nom.		dB(A)	89						
Sound pressure level	Cooling	Nom.		dB(A)	79						
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~-15						
	Condenser	Cooling	Min.~Max.	°CDB	23~60						
Refrigerant	Type/GWP				R-134a/1,430						
	Circuits	Quantity			1						
Refrigerant charge	Per circuit			kg/TCO2Eq	18.0/25.7	35.0/50.1	34.0/48.6	37.0/52.9		38.0/54.3	
Piping connections				mm	76.2						
Piping connections	Condenser water inlet/outlet (OD)				2" 1/2	4"					
Unit	Starting current	Max		A	153		197			290	
	Running current	Cooling	Nom.	A	48	57	67	74	83	97	109
		Max		A	85	103	114	130	154	178	201
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400						


performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0 m<sup>2</sup>/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

# Water to water screw heat pump, standard efficiency, standard sound

- > HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- > Daikin semi-hermetic single screw compressor
- > Direct expansion plate to plate evaporator
- > Shell and tube condenser
- > Silver efficiency and standard sound
- > Upgrade to new MicroTech 4 controller

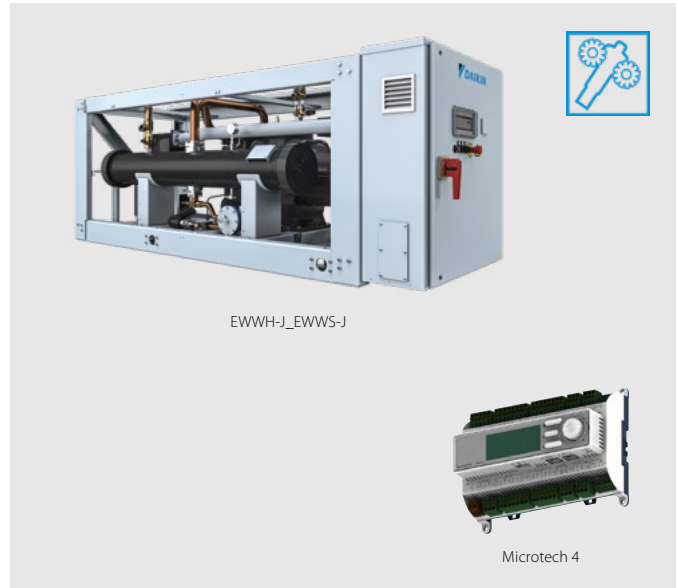

More details and final information can be found by scanning or clicking the QR codes.



EWWH-J-SS

EWWH-J-SS				090	110	120	130	150	180	200	
Space heating	Average climate water outlet 55°C	General	SCOP	3.91	3.92	3.78	3.77	3.80	3.90	3.84	
Cooling capacity	Nom.		kW	89	107	115	134	150	182	201	
Heating capacity	Nom.		kW	107	129	141	162	182	221	245	
Power input	Cooling	Nom.	kW	20.9	25.3	28.5	33.2	37.3	44.3	50.2	
Capacity control	Method			Stepless							
	Minimum capacity		%	25							
EER				4.25	4.23	4.04	4.03	4.1	4		
COP				5.11	5.08	4.88	4.85	4.93	4.83		
IPLV				4.38	4.45	4.28	4.29	4.27	4.97	4.88	
Dimensions	Unit	Height	mm	1,020							
		Width	mm	913							
		Length	mm	2,684							
Weight	Unit		kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607	
		Operation weight	kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675	
Water heat exchanger - evaporator	Type			Plate heat exchanger							
	Water volume		l	14	18	14	17	20	26		
	Water flow rate	Cooling	Nom.	l/s	4.2	5.1	5.5	6.4	7.2	8.7	9.6
		Heating	Nom.	l/s	6.8	8.3	8.9	10.2	11.8	13.9	15.4
	Water pressure drop	Cooling	Nom.	kPa	10.7	10.9	19.3	19.3	17.8	16.8	20.1
Heating		Nom.	kPa	24.9	25.9	45.6	44.9	43.7	39.2	47.4	
Water heat exchanger - condenser	Type			Shell and tube							
	Water volume		l	20	20.1	22.7	25.3	28.65	32		
	Water flow rate	Cooling	Nom.	l/s	5.2	6.3	6.8	7.8	9.1	10.7	11.9
		Heating	Nom.	l/s	5.1	6.2	6.7	7.7	8.9	10.5	11.7
	Water pressure drop	Cooling	Nom.	kPa	9.1	9.7	8.7	9.1	9.3	12.3	12.1
Heating		Nom.	kPa	8.8	9.4	8.4	8.7	8.9	11.9	11.7	
Compressor	Type			Single screw compressor							
	Quantity			1							
Sound power level	Cooling	Nom.	dB(A)	88.9							
Sound pressure level	Cooling	Nom.	dB(A)	79							
Refrigerant	Type			R-1234(ze)							
	Charge		kg	18	35	34	37	38			
	Circuits	Quantity		1							
Piping connections			mm	76.2							
Unit	Condenser water inlet/outlet		inch	2" 1/2						4	290
	Starting current	Max	A	153					197	290	
		Running current	Cooling	Nom.	A	39	44	55	60	65	76
	Max		A	75	90	100	114	143	158	178	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400							

performances according to CSS software 10.34


Fluid: Water; Fouling factor = 0 m<sup>2</sup>C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.



# Water to water screw heat pump, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

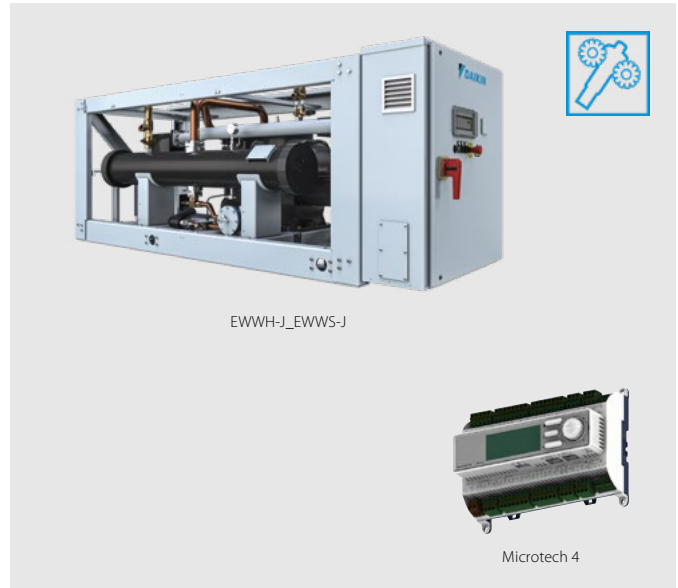

EWWS-J\_EWWS-J

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWWS-J-SS

				EWWS-J-SS		120	140	150	180	210	240	270	
Space heating	Average climate water outlet 55°C	General	SCOP		3.63	3.54	3.56	3.59	3.62	3.54	3.58		
Cooling capacity	Nom.			kW	115	136	155	181	207	241	272		
Heating capacity	Nom.			kW	142	168	191	223	257	298	338		
Power input	Cooling	Nom.		kW	30	36.3	41.7	47.8	54.2	65.7	74.4		
Capacity control	Method				Stepless								
	Minimum capacity			%	25								
EER					3.85	3.75	3.72	3.78	3.82	3.67	3.66		
COP					4.69	4.57	4.52	4.59	4.67	4.46			
IPLV					4.1	4.11	4.09	4.11	4.12	4.64	4.59		
Dimensions	Unit	Height		mm	1,020								
		Width		mm	913								
		Length		mm	2,684								
Weight	Unit			kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607		
	Operation weight			kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675		
Water heat exchanger - evaporator	Type				Plate heat exchanger								
	Water volume			l	14	18	14	17	20	26			
	Water flow rate	Cooling	Nom.		l/s	5.5	6.5	7.4	8.6	9.9	11.5	13	
			Heating	Nom.	l/s	8.8	10.8	12.1	13.8	15.5	19	21.1	
	Water pressure drop	Cooling	Nom.		kPa	17.1	16.8	32.8	33.4	31.8	27.9	34.8	
Heating			Nom.	kPa	40.1	41.7	79.4	78.1	71.5	68.9	83.3		
Water heat exchanger - condenser	Type				Shell and tube								
	Water volume			l	20	20.1	22.7	25.3	28.65		32		
	Water flow rate	Cooling	Nom.		l/s	6.9	8.4	9.4	10.8	12.1	14.8	16.5	
			Heating	Nom.	l/s	6.7	8.2	9.2	10.6	11.9	14.5	16.2	
	Water pressure drop	Cooling	Nom.		kPa	15	16.1	15.4	15.9	15.4	22	21.6	
Heating			Nom.	kPa	14.4	15.5	14.8	15.3	14.8	21.2	20.8		
Compressor	Type				Single screw compressor								
	Quantity				1								
Sound power level	Cooling	Nom.		dB(A)	88.9								
Sound pressure level	Cooling	Nom.		dB(A)	79								
Refrigerant	Type				R-513A								
	Charge			kg	18	35	34	37		38			
	Circuits	Quantity			1								
Piping connections				mm	76.2								
Piping connections	Condenser water inlet/outlet			inch	2" 1/2		4						
Unit	Starting current	Max		A	154			198		291			
		Running current	Cooling	Nom.	A	50	60	70	78	87	104	117	
	Max			A	81	96	108	122	141	164	185		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400								

performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0 m<sup>2</sup>/C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.



# The highest peak in chiller technology

The VZ chiller series were developed and manufactured to answer the growing market demands on high efficient chiller series. Thanks to the continuous evolution in components' technology, we are the first to reach the highest peak in chiller efficiency and technology.

## EWV(H)(D)(S)-VZ at a glance

### Single compressor

440kW - 1,050kW with R134a or R513A  
330kW - 790kW with R1234ze



Full inverter water cooled chiller



### Dual compressor & dual circuit unit

1,170kW - 2,070kW with R134a or R513A  
865kW - 1,540kW with R1234ze

of everything:  
2 compressors,  
2 expansion valves,  
2 condensers,...



New condenser design with integral oil separator

High efficient flooded heat exchangers



Highest efficiency in the market in its category



Unique Daikin single screw compressor technology



## Performance monitoring

With MT4, advanced algorithm implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This sensor-less algorithm calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard(\*), **no extra-hardware is required**.

(\* ) For TZ-B units an additional sub-cooling temperature sensor is required.

# Why choose EWW(H)(D)(S)-VZ at a glance chiller series?

## 1 Top class efficiency

Thanks to:

- › New generation Daikin inverter screw compressors
- › New generation high efficiency heat exchangers
- › Variable volume ratio technology
- › Optimized refrigerant circuit design

## 2 Compact unit : 40% footprint reduction

Thanks to:

- › New single pass condenser technology
- › New integrated oil separator technology
- › Optional knock down panel which reduces the unit width

## 3 Application flexibility : widest operating envelope in its range

## 4 Connectivity : Daikin on site cloud platform

## 5 Future readiness: Choose for today's best solution and be ready for the future!



## Supporting tools

### Product video



Check on




[www.youtube.com/DaikinEurope](http://www.youtube.com/DaikinEurope)



### Marketing material

All marketing material can be downloaded from the business portal.

Asset finder > Campaign > VZ chiller series

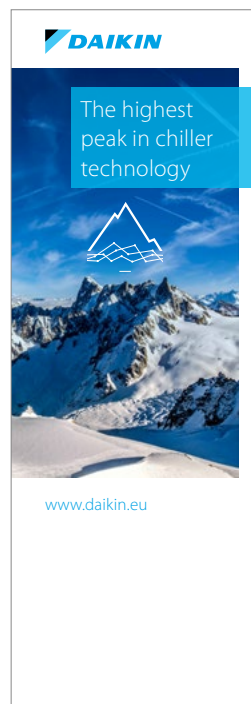

### Product profile


Want to know more about this product?

Have a look at our website and download the product profile:

[www.daikineurope.com/vzchillerseries](http://www.daikineurope.com/vzchillerseries)

# Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

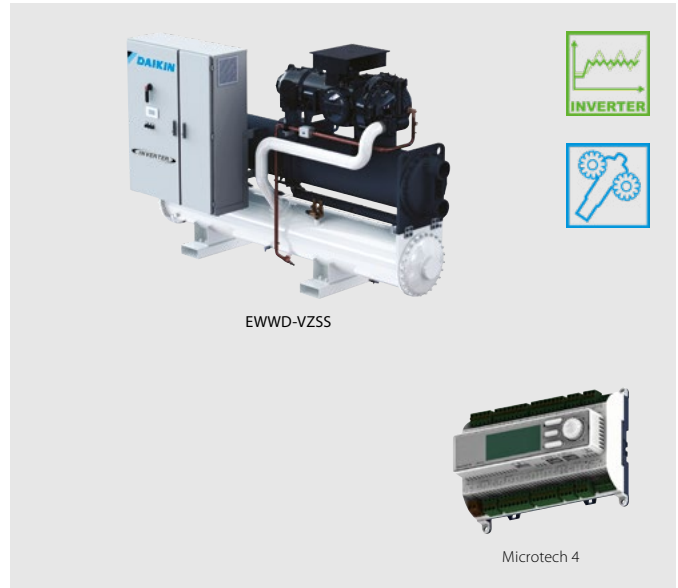

More details and final information can be found by scanning or clicking the QR codes.




EWWD-VZSS

Cooling only/Heating only				EWWD-VZSS											
				600	700	760	890	C10	C12	C13	C14	C16	C17	C19	C21
Space cooling	A Condition Pdc (35°C - 27/19)			kW											
	ηs,c			%											
SEER				8.7											
Cooling capacity				Nom. kW											
Power input				Cooling Nom. kW											
Capacity control				Method											
				Minimum capacity											
				%											
EER				5.5 5.31 5.3 5.52 5.29 5.07 5.11 5 4.93 5.08 4.93 5.08											
IPLV				9.43 9.36 9.4 9.37 9.4 9.52 9.56 9.57 9.36 9.7 9.38 9.65											
Dimensions				Unit Height mm											
				Width mm											
				Length mm											
Weight				Unit Operation weight kg											
Water heat exchanger - evaporator				Type											
				Water volume l											
				Water flow rate Cooling Nom. l/s											
				Water pressure drop Cooling Nom. kPa											
Water heat exchanger - condenser				Type											
				Water volume l											
				Water flow rate Cooling Nom. l/s											
				Water pressure drop Cooling Nom. kPa											
Compressor				Type											
				Quantity											
Sound power level				Cooling Nom. dBA											
Sound pressure level				Cooling Nom. dBA											
Operation range				Evaporator Min.-Max. °CDB											
				Condenser Min.-Max. °CDB											
Refrigerant				Type/GWP											
				Charge kg											
				Circuits Quantity											
Piping connections				mm											
				Condenser water inlet/outlet (OD)											
				Running current Cooling Nom. A											
Unit				Running current Max. A											
Power supply				Phase/Frequency/Voltage Hz/V											

performances according to CSS software 10.33

# Water cooled screw inverter chiller, high efficiency, standard sound

- > High energy efficiency both at full and part load conditions
- > Compact footprint through stacked heat exchanger lay-out
- > Heat pump version with reversibility on water side (up to 65°C hot water production)
- > Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- > Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- > High efficient flooded type heat exchanger allowing maximum unit performances
- > One or two truly independent refrigerant circuits for outstanding reliability

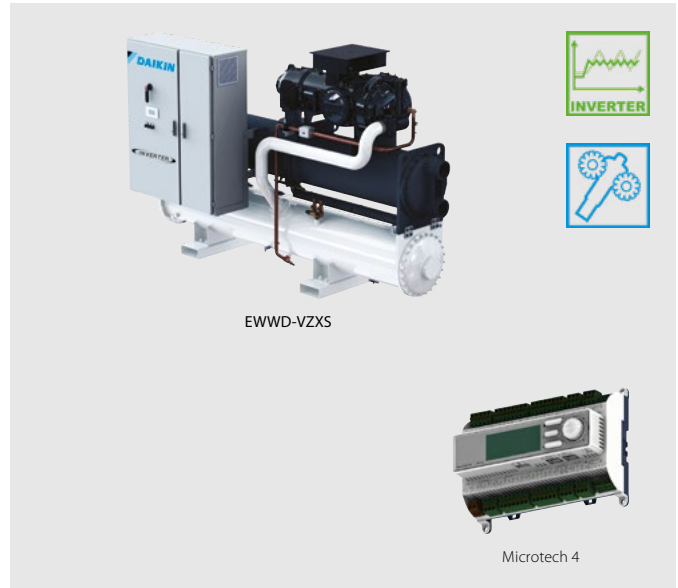

More details and final information can be found by scanning or clicking the QR codes.




EWWD-VZXS

Cooling only/Heating only		EWWD-VZXS														
		450	500	610	710	800	900	C11	C12	C13	C14	C16	C17	C19	C21	
Space cooling	A Condition Pdc (35°C - 27/19)	kW														
	η <sub>s,c</sub>	%														
SEER		8.32	8.43	8.88	8.95	8.84	8.64	8.81	8.89	8.76	8.9	8.88	8.89	8.63	8.81	
Cooling capacity	Nom.	kW														
Power input	Cooling	kW														
	Nom.	81.2	89.7	108	128	146	159	192	221	244	262	296	329	365	394	
Capacity control	Method	Variable														
	Minimum capacity	%														
EER		20														
		10														
IPLV		5.53	5.58	5.64	5.54	5.43	5.67	5.46	5.38	5.34	5.36	5.38	5.31	5.23	5.25	
		9.42	9.59	9.52	9.66	9.64	9.48	9.58	9.66	9.67	9.76	9.74	9.82	9.68	9.7	
Dimensions	Unit	mm														
	Height	2,135	2,123	2,235	2,487				2,296	2,301	2,350	2,500	2,469	2,493		
	Width	1,178	1,179	1,189	1,303				1,484	1,639	1,579	1,580	1,610	1,704	1,769	
Weight	Unit	kg														
	Operation weight	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630	
	Type	Flooded shell and tube														
Water heat exchanger - evaporator	Water volume	l	70	88	136	134	168	199	270			320	380	480		
	Water flow rate Cooling	Nom. l/s	21.5	24	29.3	34.1	38	43.2	50.4	57.1	62.5	67.3	76.3	83.6	91.4	99.2
	Water pressure drop	Cooling Nom. kPa	89	63	59	63	55	67	59	52	62	52	67	58	49	58
Water heat exchanger - condenser	Type	Shell and tube														
	Water volume	l	81	92	126	145	126	217	241	240	250	290		390	290	480
	Water flow rate Cooling	Nom. l/s	26.4	29.4	35.3	41.2	46.1	52	61	69.8	76.3	82.2	93.2	102	112	121
Compressor	Type	Driven vapour compressor														
	Quantity	1														
Sound power level	Cooling	dB(A)														
	Nom.	97	99	101	105			107	106			107	108	109	110	
Sound pressure level	Cooling	dB(A)														
	Nom.	78	80	82	86			88	87			88	89			
Operation range	Evaporator	Min.-Max. °CDB	-12~20													
	Condenser	Min.-Max. °CDB	19~65													
Refrigerant	Type/GWP	R-134a/1,430														
	Charge	kg	110	125	140	160	200	185	270	260	230	290	290	320	370	
	Circuits	Quantity	1													
Piping connections		mm														
	Condenser water inlet/outlet (OD)	168.3mm			219.1mm				168.3 / 219.1mm			219.1 / 219.1mm				273
	Running current	Cooling Nom. A	126	140	171	201	229	249	299	340	372	400	450	498	554	596
Unit	Running current Max	A	172	191	235	280	316	342	417	470	513	559	621	696	758	834
Power supply	Phase/Frequency/Voltage	Hz/V														
		3~/50/400														

performances according to CSS software 10.33

# Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

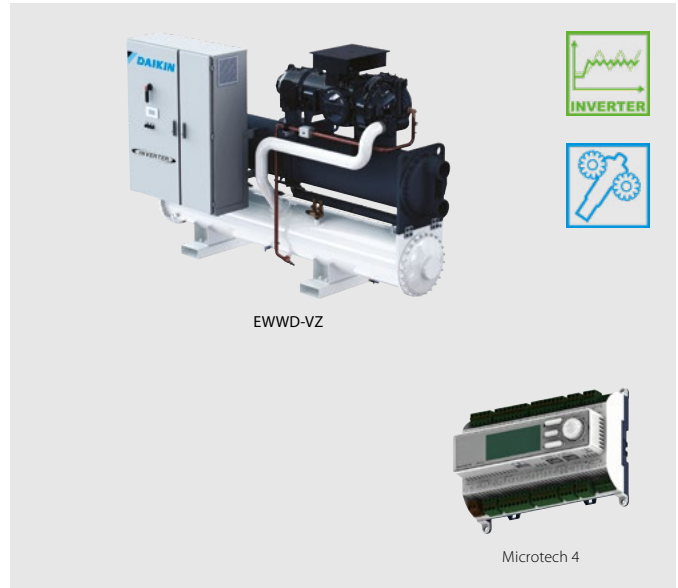

More details and final information can be found by scanning or clicking the QR codes.



EWWD-VZPS


Cooling only/ Heating only				EWWD-VZPS	505	715	910	C12	C16	C18
Space cooling	A Condition Pdc (35°C - 27/19)			kW	505.02	717.71	908.11	1,201.02	1,604.03	1,757.01
	ηs,c			%	339.6	355.2	344.4	353.6	354	350
SEER					8.69	9.08	8.81	9.04	9.05	8.95
Cooling capacity	Nom.			kW	505	718	908	1,201	1,604	1,757
Power input	Cooling	Nom.		kW	85.1	124	153	218	291	326
Capacity control	Method			Variable						
	Minimum capacity			%	20				10	
EER					5.93	5.77	5.91	5.49	5.5	5.39
IPLV					9.61	9.68	9.57	9.79	9.82	9.92
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Length	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit			kg	3,247	4,082	4,346	6,310	7,530	8,250
	Operation weight				kg	3,375	4,349	4,660	6,900	8,300
Water heat exchanger - evaporator	Type			Flooded shell and tube						
	Water volume			l	96	168	199	320	380	480
	Water flow rate	Cooling	Nom.	l/s	24.2	34.3	43.4	57.4	76.7	84
		Cooling	Nom.	kPa	55	42	44	38	49	41
Water heat exchanger - condenser	Type			Shell and tube						
	Water volume			l	126	217	241	270	390	470
	Water flow rate	Cooling	Nom.	l/s	29.4	41.3	52.1	69.9	93.4	102
		Cooling	Nom.	kPa	16	17	19	21		28
Compressor	Type			Driven vapour compressor						
	Quantity			1				2		
Sound power level	Cooling	Nom.		dB(A)	99	105		106	107	109
Sound pressure level	Cooling	Nom.		dB(A)	80	86		87	88	89
Operation range	Evaporator	Min.~Max.		°CDB	-12~20					
		Min.~Max.		°CDB	19~65					
Refrigerant	Type/GWP			R-134a/1,430						
	Charge			kg	120	195	185	305	320	350
	Circuits	Quantity		1				2		
Piping connections			mm	139.7	219.1			273		
Unit	Condenser water inlet/outlet (OD)			219.1mm				219.1 / 219.1 mm		
	Running current	Cooling	Nom.	A	138	200	247	338	447	497
		Max		A	191	280	342	470	621	696
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400					

performances according to CSS software 10.33



# Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

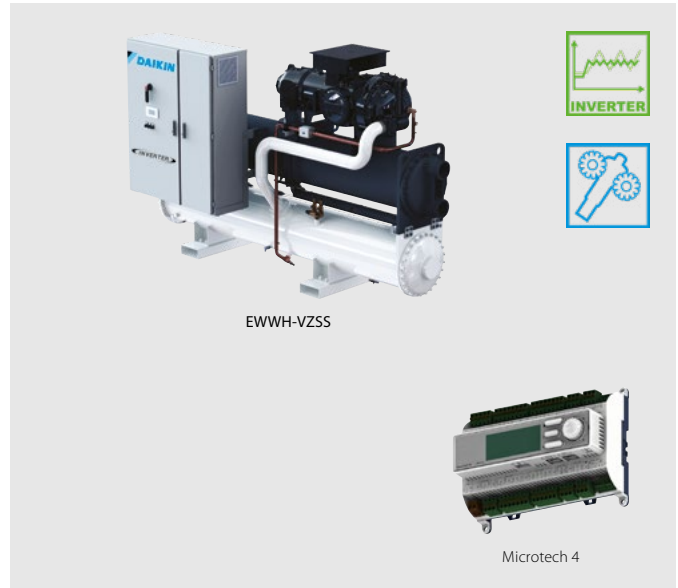

More details and final information can be found by scanning or clicking the QR codes.



EWWH-VZSS


Cooling only/Heating only				EWWH-VZSS												
				445	515	550	660	770	860	940	C10	C12	C13	C14	C15	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	443	512	548.51	657.51	767.8	865.2	940.6	1,011.7	1,142.46	1,271.38	1,396.11	1,524.83
	ηs,c			%	336.4	338.4	336.8	348.4	345.2	318.4	327.2	339.6	331.2	340	345.6	353.2
SEER					8.61	8.66	8.62	8.91	8.83	8.16	8.38	8.69	8.48	8.7	8.84	9.03
Cooling capacity	Nom.			kW	443	512	549	658	768	865	941	1,012	1,142	1,271	1,396	1,525
Power input	Cooling	Nom.		kW	82.8	98.1	107	123	149	172	188	205	235	254	282	302
Capacity control	Method			Variable												
	Minimum capacity			%	20						10					
EER					5.35	5.22	5.15	5.34	5.14	5.02	5	4.93	4.87	5.01	4.95	5.04
IPLV					9.25		9.24	9.48	9.32	8.94	9.08	9.13	9.14	9.3	9.13	9.34
Dimensions	Unit	Height	mm	2,123				2,292	2,487	2,296			2,350	2,338	2,498	
		Width	mm	1,178	1,179		1,233	1,303	1,484	1,487		1,484	1,580	1,627	1,753	
		Length	mm	3,722	3,750		3,690	3,822	4,792			4,508		4,750		
Weight	Unit	Operation weight		kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260
				kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume			l	88		96	134	156	230		270		320		380
	Water flow rate	Cooling	Nom.	l/s	21.2	24.5	26.2	31.5	36.8	41.4	45	48.4	54.6	60.8	66.8	72.9
Water heat exchanger - condenser	Type			Shell and tube												
	Water volume			l	81	102		126	217	180		200		270	250	430
	Water flow rate	Cooling	Nom.	l/s	25.5	29.6	31.8	38.1	44.8	50.3	54.8	59	66.8	74	81.4	88.7
Compressor	Type			Driven vapour compression												
	Quantity				1						2					
Sound power level	Cooling	Nom.		dB(A)	101	105		107	106		107		108		110	
Sound pressure level	Cooling	Nom.		dB(A)	82	86		88	87		88		89		90	
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	125	124	105	145	190	210	230	250	220	280		320
	Circuits	Quantity			1						2					
Piping connections				mm	139.7			168.3	219.1							
	Condenser water inlet/outlet (OD)				168.3mm			219.1mm	168.3 / 168.3 mm			219.1 / 219.1 mm				
Unit	Running current	Cooling	Nom.	A	131.0	153.0	167.0	188.0	227.0	264.0	287.0	312.0	353.0	385.0	426.0	458.0
		Max		A	183	226	235	268	324	374	402	451	493	549	591	647
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

performances according to CSS software 10.33



# Water cooled screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

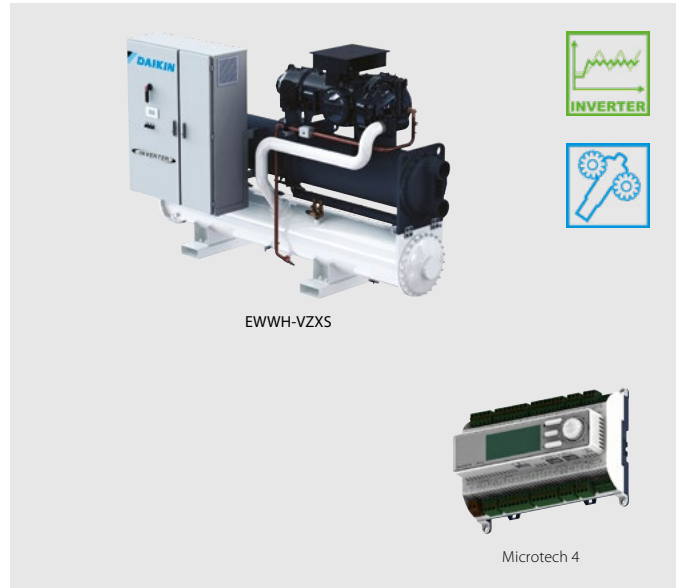

More details and final information can be found by scanning or clicking the QR codes.




EWWH-VZXS

Cooling only/Heating only				EWWH-VZXS														
				335	365	450	525	580	670	800	875	950	C11	C12	C13	C14	C15	
Space cooling	A Condition Pdc (35°C - 27/19)		kW	329.01	364.52	448	520.61	579.19	665.41	788.2	877.36	952.01	1,028.81	1,169.3	1,288.48	1,421.75	1,540.03	
	ηs,c		%	296	307.2	343.6	347.2	343.2	356	354.4	326	334	346.8			358	356.8	
SEER				7.6	7.88	8.79	8.88	8.78	9.1	9.06	8.35	8.55	8.87			9.15	9.12	
Cooling capacity	Nom.		kW	329	365	448	521	579	665	788	877	952	1,029	1,169	1,288	1,422	1,540	
Power input	Cooling		Nom.	60.5	66.6	81	96	109	121	147	168	185	198	224	248	276	298	
	Capacity control		Method	Variable														
EER	Minimum capacity		%	20						10								
				5.44	5.48	5.53	5.42	5.29	5.49	5.37	5.23	5.16	5.19	5.22	5.19	5.16	5.16	
IPLV				8.51	8.79	9.46	9.51	9.47	9.63	9.65	9.19	9.27	9.46	9.37	9.52	9.23	9.5	
Dimensions	Unit	Height	mm	2,135		2,123	2,235		2,487		2,296		2,301	2,350	2,500	2,469	2,493	
		Width	mm	1,178		1,179	1,189		1,303		1,484	1,639	1,579	1,580	1,610	1,704	1,769	
		Length	mm	3,722		3,750	3,690		3,822		4,792		4,508		4,750	4,874		
Weight	Unit	Operation weight	kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670	
			kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630	
Water heat exchanger - evaporator	Type		Flooded shell and tube															
	Water volume		l	70	88	136	134		168	199	270		320		380	480		
	Water flow rate	Cooling	Nom.	l/s	15.8	17.5	21.4	24.9	27.7	31.8	37.7	41.9	45.5	49.1	55.9	61.6	67.9	73.6
Water pressure drop		Cooling	Nom.	kPa	54	38	35	37	31	39	36	29	34	28	37	32	28	33
Water heat exchanger - condenser	Water volume		l	81	92	126	145	126	217	241	240	250	290		390	290	480	
	Water flow rate	Cooling	Nom.	l/s	18.9	20.9	25.7	30	33.5	38.4	45.7	50.7	55.1	59.6	67.6	74.6	82.3	89.3
		Water pressure drop	Cooling	Nom.	kPa	19	16	13	12	15	13	16		13	19	16	23	16
Compressor	Type		Driven vapour compression															
	Quantity			1						2								
Sound power level	Cooling	Nom.	dBA	97	99	101	105		107		106		107	108	109	110		
		Sound pressure level	Nom.	dBA	78	80	82	86		88		87		88		89		90
Refrigerant	Type/GWP		R-1234(ze)/7															
	Charge		kg	124	110	125	140	130	200	185	250	220	270	255	305	320	346	
	Circuits		Quantity	1						2								
Piping connections			mm	139.7			168.3			219.1			273					
	Condenser water inlet/outlet (OD)			168.3mm			219.1mm			168.3 / 219.1 mm			219.1 / 219.1 mm					
Unit	Running current	Cooling	Nom.	A	96.0	106.0	129.0	151.0	173.0	187.0	226.0	259.0	284.0	304.0	341.0	379.0	421.0	454.0
		Max	A	134	149	183	226	247	268	324	374	402	451	493	549	591	647	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400														

performances according to CSS software 10.33

# Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

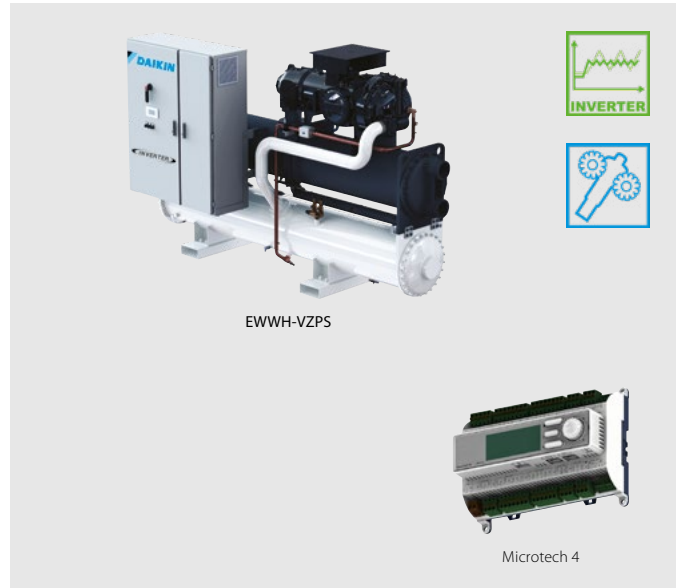

More details and final information can be found by scanning or clicking the QR codes.



EWWH-VZPS

Cooling only/Heating only				EWWH-VZPS	370	530	680	880	C12	C13
Space cooling	A Condition Pdc (35°C - 27/19)		kW	369.3	525.1	677.11	883.79	1,180.43	1,295.36	
	ηs,c		%	316.8	352.8	363.6	334.4	352.4	348.8	
SEER				8.12	9.02	9.29	8.56	9.01	8.92	
Cooling capacity	Nom.		kW	369	525	677	884	1,180	1,295	
Power input	Cooling	Nom.	kW	64.7	94.9	119	166	221	247	
Capacity control	Method			Variable						
	Minimum capacity		%	20						
EER				5.71	5.53	5.67	5.34	5.35	5.25	
IPLV				9.13	9.68	9.96	9.37	9.56	9.61	
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Length	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit			kg	3,247	4,082	4,346	6,310	7,530	8,250
	Operation weight			kg	3,375	4,349	4,660	6,900	8,300	9,200
Water heat exchanger - evaporator	Type			Flooded shell and tube						
	Water volume		l	96	168	199	320	380	480	
	Water flow rate	Cooling Nom.	l/s	17.7	25.1	32.3	42.2	56.4	61.9	
	Water pressure drop	Cooling Nom.	kPa	32	25	27	20	26	23	
Water heat exchanger - condenser	Type			Shell and tube						
	Water volume		l	126	217	241	270	390	470	
	Water flow rate	Cooling Nom.	l/s	21.1	30.1	38.9	50.9	68	74.9	
	Water pressure drop	Cooling Nom.	kPa	9		12	13	12	16	
Compressor	Type			Driven vapour compression						
	Quantity			1				2		
Sound power level	Cooling	Nom.	dBA	99	105		106	107	109	
Sound pressure level	Cooling	Nom.	dBA	80	86		87	88	89	
Refrigerant	Type/GWP			R-1234(ze)/7						
	Charge		kg	120	190	185	305	288	350	
	Circuits	Quantity		1				2		
Piping connections			mm	139.7	219.1			219.1		273
	Condenser water inlet/outlet (OD)			219.1mm			219.1 / 219.1 mm			
Unit	Running current	Cooling	Nom.	A	104.0	150.0	185.0	257.0	338.0	378.0
		Max		A	149	226	268	374	493	549
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400						

performances according to CSS software 10.33





# Water to water screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 60°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZSS


Cooling only/Heating only				EWWS-VZSS	600	700	740	880	C10	C12	C13	C14	C15	C17	C18	C20
Space cooling	A Condition Pdc (35°C - 27/19)		kW	599.51	693.51	743.53	879.64	1,020.09	1,148.76	1,263.41	1,351.54	1,514.87	1,689.58	1,831.98	2,013.41	
	ηs,c		%	316	314.4	313.2	320	313.2	321.2	314.8	312	297.6	313.6	304	318.4	
SEER				8.1	8.06	8.03	8.2	8.03	8.23	8.07	8	7.64	8.04	7.8	8.16	
Cooling capacity	Nom.		kW	600	694	744	880	1,020	1,149	1,263	1,352	1,515	1,690	1,832	2,013	
Power input	Cooling	Nom.	kW	120.1	143.3	154.7	175.2	212.7	251.8	273.9	301	343	367.4	413.5	437.2	
Capacity control	Method			Variable												
	Minimum capacity		%	20						10						
EER				4.99	4.84	4.81	5.02	4.8	4.56	4.61	4.49	4.42	4.6	4.43	4.61	
IPLV				9.02	9.15		8.84	8.88	9.06	9.31	9.23	8.9	9.18	8.88	9.05	
Dimensions	Unit	Height	mm	2,123			2,292	2,487	2,296			2,350	2,338	2,498		
		Width	mm	1,178	1,179		1,233	1,303	1,484	1,487		1,484	1,580	1,627	1,753	
		Depth	mm	3,722	3,750		3,690	3,822	4,792			4,508			4,750	
Weight	Unit		kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260	
	Operation weight		kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070	
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume		l	88			96	134	156	230		270		320		380
	Water flow rate	Cooling Nom.	l/s	28.7	33.3	35.7	42.2	48.9	55	60.6	64.7	72.6	80.9	87.8	96.4	
Water heat exchanger - condenser	Type			Flooded Shell & Tube												
	Water volume		l	81	102		126	217	180	200		270		250	430	
	Water flow rate	Cooling Nom.	l/s	34.5	40.1	43.2	50.6	59.3	67.1	73.7	79.2	89	98.7	107	117	
Compressor	Type			Driven vapour compressor												
	Quantity			1						2						
	Sound power level	Cooling Nom.	dB(A)	101	105			107	106		107		108		110	
Sound pressure level	Cooling Nom.	dB(A)	82	86			88	87		88		89		90		
Refrigerant	Type/GWP			R-513A/631												
	Charge		kg	100	110		170	180	250	260	270	290	295	320	350	
	Circuits	Quantity		1						2						
Piping connections			mm	139.7			168.3	219.1								
			mm	168.3			219.1		168.3			219.1				

performances according to CSS software 10.33



# Water to water screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

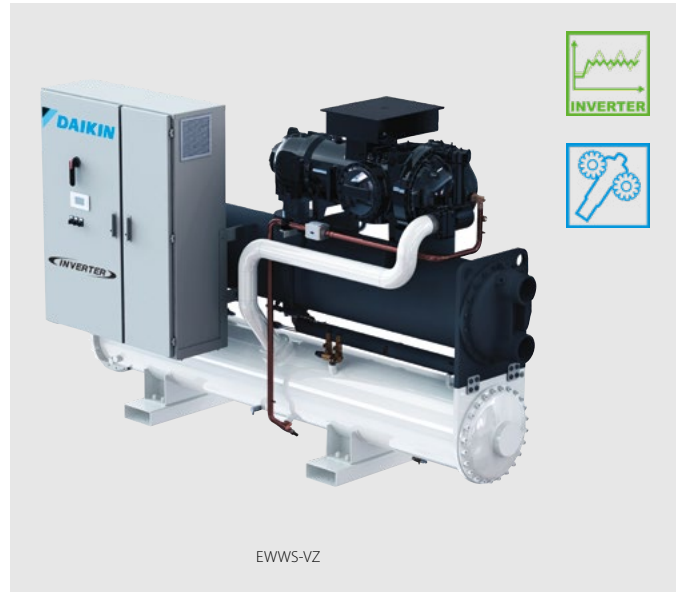

EWWS-VZ

More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZXS

Cooling only/Heating only				EWWS-VZXS	450	490	600	700	780	890	C10	C12	C13	C14	C16	C17	C19	C20
Space cooling	A Condition Pdc (35°C - 27/19)			kW	441.23	493.3	605.32	704.66	783.15	888.89	1,038.67	1,178.53	1,287.26	1,390.42	1,570.18	1,725.3	1,876.17	2,045.66
	ηs,c			%	306.4	313.6	328.4	329.2	328	328.4	328.8	331.2	326.4	329.2	331.2	326.4	323.2	326.8
SEER					7.86	8.04	8.41	8.43	8.4	8.41	8.42	8.48	8.36	8.43	8.48	8.36	8.28	8.37
Cooling capacity	Nom.			kW	441	493	605	705	783	889	1,039	1,179	1,287	1,390	1,570	1,725	1,876	2,046
Power input	Cooling Nom.			kW	87.8	96.8	116.8	138.6	157.7	171.3	207.8	239.2	263.6	282.6	319.6	354.3	396.6	425.5
Capacity control	Method			Variable														
	Minimum capacity			%	20						10							
EER					5.02	5.1	5.18	5.09	4.97	5.19	5	4.93	4.88	4.92	4.91	4.87	4.73	4.81
IPLV					8.87	9.01	9.29	9.43	9.39	8.96	9.27	9.24	9.48	9.43	9.39	9.29	9.15	
Dimensions	Unit	Height		mm	2,135	2,123	2,123	2,235	2,487	2,487	2,296	2,301	2,350	2,500	2,469	2,493		
		Width		mm	1,178	1,179	1,189	1,303	1,484	1,639	1,579	1,580	1,610	1,704	1,769			
		Depth		mm	3,722	3,750	3,690	3,822	4,792	4,508	4,750	4,874						
Weight	Unit			kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670
	Operation weight			kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630
Water heat exchanger - evaporator	Type			Flooded shell and tube														
	Water volume			l	70	88	136	134	168	199	270	320	380	480				
	Water flow rate	Cooling Nom.		l/s	21.2	23.6	29	33.7	37.5	42.6	49.7	56.4	61.6	66.5	75.2	82.6	89.7	97.9
Water pressure drop		Cooling Nom.		kPa	91	64	61	65	57	69	60	53	64	53	68	59	50	60
	Water heat exchanger - condenser	Type			Flooded Shell & Tube													
Water volume			l	81	92	126	145	126	217	241	240	250	290	390	290	480		
Water flow rate		Cooling Nom.		l/s	25.8	28.7	34.5	40.4	45.1	50.8	59.8	68	74.4	80.2	90.7	99.8	108	118
	Water pressure drop	Cooling Nom.		kPa	31	27	22	20	24	25	28	21	32	27	36	27		
Compressor		Type			Driven vapour compressor													
	Quantity				1						2							
Sound power level	Cooling Nom.		dB(A)	97	99	101	105	107	106	107	108	109	110					
	Sound pressure level		dB(A)	78	80	82	86	88	87	88	89	90						
Refrigerant	Type/GWP			R-513A/631														
	Charge			kg	95	130	110	170	210	185	250	260	290	320	350			
	Circuits	Quantity				1						2						
Piping connections			mm	139.7			168.3			219.1			273					
				mm	168.3		219.1			168.3 / 219.1		219.1						

performances according to CSS software 10.33



# Water to water screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



EWWS-VZ

More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZPS

Cooling only/Heating only				EWWS-VZPS	500	710	900	C12	C16	C17
Space cooling	A Condition Pdc (35°C - 27/19)		kW	500.08	710.08	898.24	1,187.65	1,585.78	1,735.47	
	ηs,c		%	321.6	334	335.2	336.4	330		
SEER				8.24	8.55	8.58	8.61	8.45		
Cooling capacity	Nom.		kW	500	710	898	1,188	1,586	1,735	
Power input	Cooling	Nom.	kW	91.3	133.8	165.1	235.4	313.7	350.7	
Capacity control	Method			Variable						
	Minimum capacity		%	20		10				
EER				5.48	5.31	5.44	5.05	4.95		
IPLV				9.13	9.48	9.17	9.36	9.48	9.4	
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Depth	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit		kg	3,247	4,082	4,346	6,310	7,530	8,250	
	Operation weight		kg	3,375	4,349	4,660	6,900	8,300	9,200	
Water heat exchanger - evaporator	Type			Flooded shell and tube						
	Water volume		l	96	168	199	320	380	480	
	Water flow rate	Cooling	Nom.	l/s	23.9	34	43	56.8	75.8	83
		Water pressure drop	Cooling	Nom.	kPa	57	44	46	39	50
Water heat exchanger - condenser	Type			Flooded Shell & Tube						
	Water volume		l	126	217	241	270	390	470	
	Water flow rate	Cooling	Nom.	l/s	28.9	40.6	51.1	68.3	91.1	100
		Water pressure drop	Cooling	Nom.	kPa	16	17	19	21	27
Compressor	Type			Driven vapour compressor						
	Quantity			1		2				
Sound power level	Cooling	Nom.	dB(A)	99	105	106	107	109		
	Sound pressure level	Cooling	Nom.	dB(A)	80	86	87	88	89	
Refrigerant	Type/GWP			R-513A/631						
	Charge		kg	130	180	190	320	350		
	Circuits	Quantity		1		2				
Piping connections			mm	139.7	219.1				273	
			mm	219.1						

performances according to CSS software 10.33

# Condenserless scroll chiller

- > One of the most compact units on the market:  
600mm x 600mm x 600mm
- > Low energy consumption
- > Low operating sound level
- > Easy installation and maintenance
- > Stainless steel plate heat exchanger
- > Low refrigerant volume
- > Standard integrated: pressure ports, flow switch, filter, shut-off valves and air purge
- > Advanced  $\mu C^2SE$  controller for direct connection to a Modbus based BMS or to a remote user interface

Product launch for the new Hydrocubes scheduled on April 2022



More details and final information can be found by scanning or clicking the QR codes.



EWLQ-KBW1N

Cooling Only		EWLQ-KBW1N		014	025	033	049	064
Cooling capacity	Nom.	kW		12.05	21.87	27.96	43.4	56.71
Power input	Cooling	Nom.	kW	3.54	6.42	8.26	12.74	16.2
EER				3.402	3.406	3.386	3.406	3.501
Dimensions	Unit	Height	mm	600				
		Width	mm	600				
		Depth	mm	600		1,200		
Weight	Unit	kg		104	138	149	252	274
Water heat exchanger - evaporator	Type			Brazed plate				
	Water pressure drop	Cooling	Nom.	kPa	16.5	24.2	22.1	20
Compressor	Type			Scroll compressor				
	Quantity			1		2		
Sound power level	Cooling	Nom.	dBA	64.0		71.0	67.0	74.0
		Nom.	dBA	64.0		71.0	67.0	74.0
Operation range	Evaporator	Cooling	Min.-Max.	°CDB				
	Condenser	Cooling	Min.-Max.	°CDB				
Refrigerant	Type			R-410A				
	Circuits	Quantity		1		2		
Piping connections	Evaporator water inlet/outlet (OD)			G1"		G1" 1/2		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400				





# Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information can be found by scanning or clicking the QR codes.



EWLQ-G-SS

Cooling only				EWLQ-G-SS											
Cooling capacity	Nom.			090	100	120	130	150	170	190	210	240	300	360	
Power input	Cooling	Nom.	kW	22.4	25.8	29.2	33.0	36.8	42.0	47.0	54.2	59.9	75.6	91.8	
Capacity control	Method	Step													
	Minimum capacity	%		50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0	
EER				3.86	3.81	3.78	3.79	3.80	3.86	3.80	3.85	3.84	3.77		
Dimensions	Unit	Height	mm	1,066										1,186	
		Width	mm	928											
		Length	mm	2,743											
Weight	Unit			kg	494	578	686	714	742	773	807	838	852	967	1,046
	Operation weight			kg	525	615	729	760	791	826	863	901	916	1,044	1,134
Water heat exchanger - evaporator	Type	Plate heat exchanger													
	Water volume			l	6	8	10	12	13	15	17	27	34		
	Water flow rate	Nom.		l/s	4.2	4.7	5.3	6.0	6.7	7.7	8.7	9.8	11.1	13.9	16.6
Compressor	Water pressure drop	Cooling	Nom.	kPa	44	35	29	31	33	30	38	41			
	Type	Scroll compressor													
Sound power level	Quantity	2													
	Cooling	Nom.	dB(A)	80.0	83.0	85.0	87.0	88.0	90.0	92.0	93.0				
Sound pressure level	Cooling	Nom.	dB(A)	64.0	67.0	69.0	70.0	72.0	74.0	76.0	77.0				
	Evaporator	Cooling	Min.-Max.	°CDB	-10~15										
Operation range	Condenser	Cooling	Min.-Max.	°CDB	30~60										
	Refrigerant	Type / GWP	R-410A / 2,087.5												
Piping connections	Circuits	Quantity	1												
	Evaporator water inlet/outlet (OD)			1" 1/2	2" 1/2						3"				
Unit	Starting current	Max	A	204	255	261	308	316	354	368	466	481.0	640	677	
	Running current	Cooling	Nom.	A	39	42	45	51	57	64	70	81	88	111	135
		Max	A	59	66	72	80	88	102	116	131	145	183	221	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

# Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information can be found by scanning or clicking the QR codes.




EWLQ-L-SS

Cooling only				EWLQ-L-SS	180	205	230	260	290	330	380	430	480	540	600	660	720
Cooling capacity	Nom.		kW	173	197	224	249	279	317	361	409	459	511	571	624	676	
Power input	Cooling	Nom.	kW	44.3	51.1	57.9	65.6	73.2	83.8	93.5	108	119	135	152	168	184	
Capacity control	Method			Step													
	Minimum capacity		%	25.0	21.0	25.0	22.0	25.0	23.0	25.0	21.0	25.0	22.0	20.0	18.0	25.0	
EER				3.91	3.86	3.87	3.79	3.81	3.78	3.86	3.79	3.84	3.78	3.76	3.71	3.67	
Dimensions	Unit	Height	mm	1,970													
		Width	mm	928													
		Length	mm	2,801													
Weight	Unit		kg	832	1,007	1,202	1,252	1,333	1,380	1,432	1,511	1,560	1,609	1,694	1,833	1,957	
	Operation weight		kg	894	1,081	1,292	1,345	1,436	1,486	1,547	1,638	1,690	1,741	1,844	1,990	2,120	
Water heat exchanger - evaporator	Type			Plate heat exchanger													
	Water volume		l	19	22	29	35	41	49	62							
	Water flow rate	Nom.	l/s	8.3	9.5	10.7	11.9	13.4	15.2	17.3	19.6	21.9	24.5	27.3	29.9	32.4	
Compressor	Water pressure drop	Cooling	Nom.	kPa	25	20	25	22	29	36	45	44	52	62			
	Type			Scroll compressor													
Sound power level	Quantity			4													
	Cooling	Nom.	dB(A)	83.0	86.0	88.0	90.0	91.0	93.0	95.0	96.0						
Sound pressure level	Cooling	Nom.	dB(A)	65.0	68.0	70.0	72.0	74.0	73.0	76.0	77.0	78.0					
	Evaporator	Cooling	Min.-Max.	°CDB	-10~15												
Operation range	Condenser	Cooling	Min.-Max.	°CDB	30~60												
	Refrigerant	Type / GWP		R-410A / 2,087.5													
Piping connections	Circuits	Quantity		2													
	Evaporator water inlet/outlet (OD)			3"													
Unit	Starting current	Max	A	263	320	333	388	403	456	484	597	626	785	822	860	898	
	Running current	Cooling	Nom.	A	78	84	90	102	114	128	141	161	176	199	223	246	269
		Max	A	118	131	144	160	175	205	232	262	290	328	366	403	441	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400													

# Condenserless screw chiller, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface

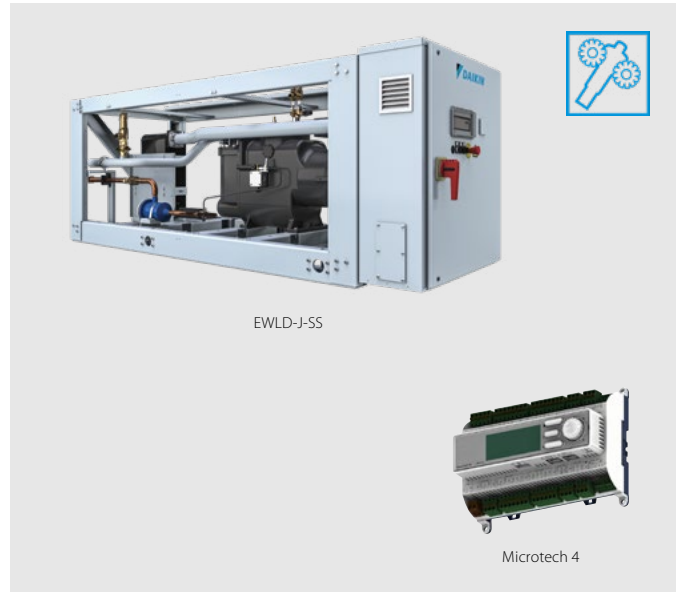

EWLD-J-SS

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.




EWLD-J-SS

Cooling only				EWLD-J-SS	110	130	145	165	195	235	265
Cooling capacity	Nom.		kW	110	128	142	163	191	236	264	
Power input	Cooling	Nom.	kW	31.2	38.4	43.8	50.4	56.0	66.0	75.3	
Capacity control	Method	Stepless									
	Minimum capacity	25.0									
EER				3.51	3.33	3.25	3.24	3.42	3.58	3.51	
Dimensions	Unit	Height	mm	1,020							
		Width	mm	913							
		Length	mm	2,684							
Weight	Unit		kg	1,124	1,141	1,237	1,263	1,305	1,489	1,489	
	Operation weight		kg	1,138	1,159	1,253	1,281	1,327	1,518	1,518	
Water heat exchanger - evaporator	Type	Plate heat exchanger									
	Water volume		l	14	18	14	17	20	26	26	
	Water flow rate	Nom.	l/s	5.2	6.1	6.8	7.8	9.2	11.3	12.6	
	Water pressure drop	Cooling	Nom.	kPa	14	13	39	37	33	26	32
Compressor	Type	Single screw compressor									
	Quantity	1									
Sound power level	Cooling	Nom.	dBA	89.0							
Sound pressure level	Cooling	Nom.	dBA	79.0							
Operation range	Evaporator	Cooling	Min.-Max.	-10~-15							
	Condenser	Cooling	Min.-Max.	25~60							
Refrigerant	Type / GWP	R-134a / 1,430									
	Circuits	Quantity		1							
Piping connections	Evaporator water inlet/outlet (OD)			76.2 mm							
Unit	Maximum starting current		A	153		197		197	290	290	
	Nominal running current (RLA)	Cooling	A	52	62	72	81	91	107	120	
	Maximum running current		A	85	103	114	130	154	168	201	
Power supply	Phase/Frequency/Voltage			Hz/V 3~/50/400							

performances according to CSS software 10.34

# Condenserless screw chiller, standard efficiency, standard sound

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

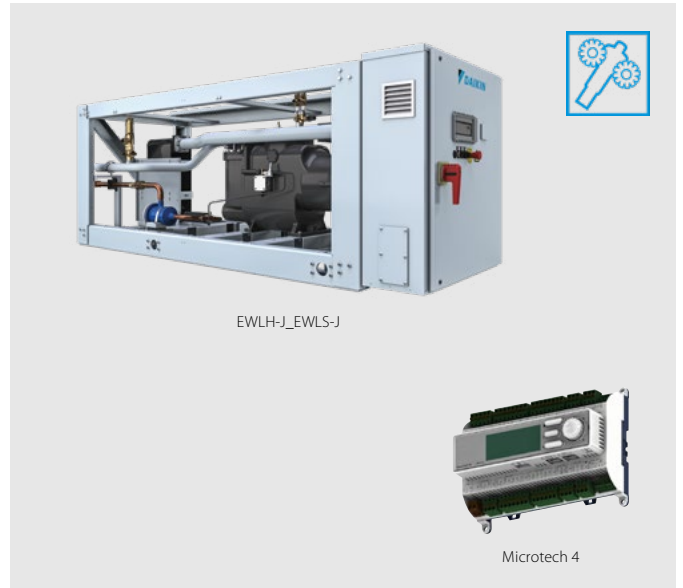

EWLH-J\_EWLS-J

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.




EWLH-J-SS

				EWLH-J-SS	080	100	110	130	140	170	190
Cooling capacity	Nom.			kW	84	102	109	127	143	174	193
Power input	Cooling	Nom.		kW	23.3	28.1	31.8	37	41.5	49.6	56.3
Capacity control	Method			Stepless							
	Minimum capacity			%	25						
EER					3.62		3.43	3.42	3.43	3.51	3.43
Dimensions	Unit	Height		mm	1,020						
		Width		mm	913						
		Length		mm	2,684						
Weight	Unit			kg	1,124	1,141	1,237	1,263	1,305	1,489	
	Operation weight			kg	1,138	1,159	1,253	1,281	1,327	1,518	
Water heat exchanger - evaporator	Type			Plate heat exchanger							
	Water volume			l	14	18	14	17	20	26	
	Water flow rate	Cooling	Nom.	l/s	4	4.9	5.2	6	6.8	8.3	9.2
				kPa	9.7	9.9	17.5	17.6	16.2	15.5	18.7
Compressor	Type			Single screw compressor							
	Quantity				1						
Sound power level	Cooling	Nom.		dBA	88.9						
Sound pressure level	Cooling	Nom.		dBA	79						
Refrigerant	Type			R-1234(ze)							
	Circuits	Quantity			1						
Piping connections				mm	76.2						
Unit	Starting current	Max		A	153			197		290	
		Running current	Cooling	Nom.	A	42	48	59	65	72	84
	Max		A	75	90	100	114	143	158	178	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400						

performances according to CSS software 10.34

# Condenserless screw chiller, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

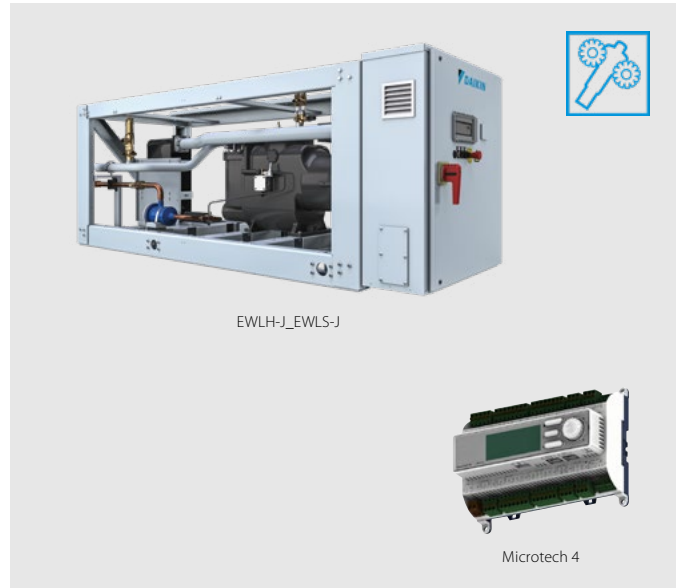

EWLH-J\_EWLS-J

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWLS-J-SS

				EWLS-J-SS		110	130	150	170	200	240	270	
Cooling capacity	Nom.		kW	111	132	150	175	200	236	268			
Power input	Cooling	Nom.		kW	32.2	38.7	44.8	51.2	58.2	69.4	78.8		
Capacity control	Method		Stepless										
	Minimum capacity		%	25									
EER				3.44	3.4	3.35	3.41	3.44	3.41	3.4			
Dimensions	Unit	Height	mm	1,020									
		Width	mm	913									
		Length	mm	2,684									
Weight	Unit			kg	1,124	1,141	1,237	1,263	1,305	1,489			
		Operation weight		kg	1,138	1,159	1,253	1,281	1,327	1,518			
Water heat exchanger - evaporator	Type		Plate heat exchanger										
	Water volume		l	14	18	14	17	20	26				
	Water flow rate	Cooling	Nom.	l/s	5.3	6.3	7.2	8.4	9.6	11.3	12.8		
	Water pressure drop	Cooling	Nom.	kPa	16	15.8	31.1	31.5	30	27	33.8		
Compressor	Type		Single screw compressor										
	Quantity			1									
Sound power level	Cooling	Nom.		dB(A)	88.9								
Sound pressure level	Cooling	Nom.		dB(A)	79								
Refrigerant	Type		R-513A										
	Circuits	Quantity			1								
Piping connections			mm	76.2									
Unit	Starting current	Max		A	154				198			291	
		Running current	Cooling	Nom.	A	54	65	75	84	94	111	125	
			Max		A	81	96	108	122	141	164	185	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400									

performances according to CSS software 10.34

# Condenserless screw chiller, standard efficiency, standard sound

- › DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- › Stepless single-screw compressor
- › Standard electronic expansion valve
- › Optimised for use with R-134a



More details and final information can be found by scanning or clicking the QR codes.



EWLD-I-SS

Cooling only				EWLD-I-SS	320	400	420	500	600	650	750	800	850	900	950	C10	C11	C12	C13	C14	C15	C16	C17
Cooling capacity	Nom.			kW	315	374	437	509	607	670	740	802	865	935	975	1,029	1,097	1,144	1,210	1,278	1,330	1,381	1,433
Power input	Cooling	Nom.		kW	80.3	96.0	113	134	160	175	192	208	224	246	264	283	286	302	318	336	356	375	395
Capacity control	Method				Stepless																		
	Minimum capacity			%	25.0				12.5				8.3										
EER					3.93	3.89	3.88	3.79	3.80	3.82	3.86		3.81	3.69	3.64	3.83	3.79	3.80		3.74	3.68	3.63	
Dimensions	Unit	Height		mm	1,899				2,325				2,415										
		Width		mm	1,464								2,135										
		Length		mm	3,114				4,391				4,426										
Weight	Unit			kg	1,861	1,869	1,884	3,331	3,339	3,347	3,356	3,364	3,412	5,146	5,167	5,188	5,208						
	Operation weight			kg	2,054	2,052	2,056	3,602	3,603	3,604	3,605	3,645	5,667	5,671	5,677	5,680							
Water heat exchanger - evaporator	Type				Single pass shell and tube																		
	Water volume			l	193	183	172	271	263	256	248	241	233	504	489	472	504	489	472				
	Water flow rate	Nom.		l/s	15.1	17.9	20.9	24.4	29.1	32.1	35.4	38.4	41.4	44.8	46.7	49.3	52.5	54.8	57.9	61.2	63.7	66.1	68.6
Compressor	Water pressure drop	Cooling	Total	kPa	34	46	49	56	50	40	52	49	40	49	36	54	47	51	43	53	57	61	65
	Type				Single screw compressor																		
Sound power level	Quantity				1				2				3										
	Cooling	Nom.		dB(A)	94.0	97.0				98.0	99.0	100.0				101.0	103.0						
Sound pressure level	Cooling	Nom.		dB(A)	75.0	76.0	78.0				79.0	80.0	81.0				80.0	81.0	83.0				
	Evaporator	Cooling	Min.-Max.	°CDB	-8~15																		
Operation range	Condenser	Cooling	Min.-Max.	°CDB	25~60																		
	Type / GWP				R-134a / 1,430																		
Refrigerant	Circuits	Quantity			1				2				3										
	Evaporator water inlet/outlet (OD)				42mm																		
Piping connections	Unit	Maximum starting current		A	330	464		493	627	650	681	703		836	867	898	920	942					
	Nominal running current (RLA)	Cooling		A	131	157	181	214	260	287	313	338	361	391	420	448	470	493	517	542	571	601	631
	Maximum running current			A	204	233	271	299	407	436	465	504	542	570	597	670	698	737	775	814	841	868	896
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400																		



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants



EWWD-DZ

Microtech 4



More details and final information can be found by scanning or clicking the QR codes.



EWWD-DZXS

Cooling Only				EWWD-DZXS																
				320	440	530	610	640	700	880	C10	C13	C14	C15	C21					
Space cooling	A Condition Pdc (35°C - 27/19)			kW	320.01	443.01	528	610.02	638.01	699.97	883.01	1,056	1,325.26	1,402	1,564.57	2,070.42				
	ηs,c			%	334	314	324	344	349	342	350	363	349.8	362	360.6	365.4				
SEER					8.72	8.65	9.08	8.91	8.95	8.79	8.99	9.31	8.86	9.32	9.13	9.28				
Cooling capacity	Nom.			kW	320	443	528	610	638	700	883	1,056	1,325	1,402	1,565	2,070				
Power input	Cooling	Nom.		kW	66.5	88.5	102	124.7	131	126	176	205	272	256	310	391				
Capacity control	Method			Variable																
	Minimum capacity			%	30	21	16	15	18	11	7	9	8	6						
EER					4.81	5	5.14	4.89	4.85	5.53	5.01	5.15	4.88	5.46	5.04	5.3				
ESEER					7.94	7.92	8.2	7.78	8.16	8.08	8.09	8.39	-	8.29						
IPLV					9.38	9.33	9.7	9.41	9.5	9.86	9.52	9.91	9.18	10.1	9.5	9.42				
Dimensions	Unit	Height		mm	1,865			1,985			2,200		2,083		2,200		2,225		2,290	
		Width		mm	1,055			1,160			1,270		1,510		1,270		1,510			
		Length		mm	3,625			3,585			3,580		4,793		3,580		4,768		4,812	
		Operation weight		kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	4,350	3,800	4,750	5,500				
Water heat exchanger - evaporator	Type			Flooded shell and tube																
	Water volume			l	70	96	107		134		156	199	271.8	229	317.4	444.3				
	Water flow rate	Nom.		l/s	15.3	21.2	25.3	29.1	30.5	33.5	42.3	50.6	-	67.2						
		Cooling	Nom.	l/s	-															
Water pressure drop	Cooling	Nom.	kPa	47.4	40.6	45	59.1	51	61.3	64	60.4	60.1	74	61.1	71.9					
				Shell and tube												Flooded Shell & Tube	Shell and tube	Flooded Shell & Tube		
Water heat exchanger - condenser	Type			Shell and tube																
	Water volume			l	83	100	120		170	188	211	263	359.9	320	442.6	603.6				
	Water flow rate	Nom.		l/s	18.3	25.3	30.1	35.1	36.7	39.4	50.5	60.1	-	79.1						
		Cooling	Nom.	l/s	-															
Water pressure drop	Cooling	Nom.	kPa	49.2	59.5	54.5	74	46.2	41.6	50.9	50.3	56	52.9	43	57					
				Driven vapour compressor																
Compressor	Type			Driven vapour compressor																
	Quantity				1		2		1	2		3	2	3						
Sound power level	Cooling	Nom.		dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	93.3	99	94.3	100	101				
		Nom.		dB(A)	69.6	70.6	71.6	72.6		73.6		74.6	80	75.6	81	82				
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	4~20															
					Condenser	Cooling	Min.~Max.	°CDB	20~55		20~42		20~55		20~42		20~55		20~42	
Refrigerant	Type/GWP			R-134a/1,430																
	Charge			kg	120			180			230	320	230	340	390					
	Circuits			Quantity	1															
Refrigerant charge				TCO2eq	172			257			329	-	329							
Piping connections				mm	139.7			168.3			219.1									
Piping connections				mm	139.7			168.3			219.1									
Unit	Running current	Cooling	Nom.	A	100.55	138.22	155.23	203.41	200.56	190.23	274.86	309.17	445	383.87	471.7	588				
					Max	A	134	208	166	267		196	417	331	631	392	511	589		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400															

performances according to CSS software 10.27





# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.



EWWD-DZXE

Cooling Only				EWWD-DZXE															
Space cooling				kW															
A Condition Pdc (35°C - 27/19)				341.01	474.02	566	670	682	741.96	946	1,038.18	1,130	1,436.52	1,477.93	1,684.76	2,172.91			
ηs,c				%															
SEER				335	316	326	345	349	346	352	339.8	365	350.6	366	359	370.2			
Cooling capacity Nom.				kW															
Power input Cooling Nom.				kW															
Capacity control Method				Variable															
Minimum capacity				%															
EER				29	20	15	17	10	7	9	7	6							
ESEER				4.88	5.07	5.22	4.84	4.91	5.65	5.08	4.94	5.23	4.98	5.6	5.12	5.53			
IPLV				7.81	7.83	8.11	7.52	8	8.09	7.96	-	8.26	-	8.22	-				
Dimensions Unit				mm															
Height				1,865				1,985				2,082		2,200		2,225		2,290	
Width				1,055				1,160				1,510		1,270		1,510		1,510	
Length				3,625				3,585				4,688		3,580		4,793		3,580	
Weight Unit				kg															
Operation weight				1,750	1,950	2,050	2,850	2,650	3,000	4,400	3,700	4,700	3,900	5,100	5,900				
Water heat exchanger - evaporator Type				Flooded shell and tube															
Water volume				70	96	107	134	156	207.3	199	317.4	229	317.4	444.3					
Water flow rate Nom.				l/s															
Cooling Nom.				16.4	22.7	27.1	32	32.7	35.6	45.3	-	54.1	-	70.9	-				
Water pressure drop Cooling Nom.				kPa															
Water pressure drop				54.2	46.5	51.5	71.4	58.3	68.7	73.2	61.4	68.9	70.7	82	70.7	78.9			
Water heat exchanger - condenser Type				Shell and tube															
Water volume				83	100	120	170	188	211	326.4	263	359.9	320	442.6	603.6				
Water flow rate Nom.				l/s															
Cooling Nom.				19.6	27	32.1	38.6	39.1	41.6	53.9	-	64.1	-	83	-				
Water pressure drop Cooling Nom.				kPa															
Water pressure drop				56.4	68.4	62.4	90	52.9	46.7	58.3	44	57.6	66	58.5	50	62			
Compressor Type				Driven vapour compressor															
Quantity				1 2 1 2 3 2 3 2 3															
Sound power level Cooling Nom.				dBA															
Sound pressure level Cooling Nom.				87.9	88.9	89.9	91.1	91	91.1	92	98	93.3	99	94.3	100	101			
Operation range Evaporator Cooling Min.~Max.				°CDB															
Condenser Cooling Min.~Max.				°CDB															
Refrigerant Type/GWP				R-134a/1,430															
Charge				kg															
Circuits Quantity				1															
Refrigerant charge				tCO <sub>2</sub> eq															
Piping connections				mm															
Unit				mm															
Running current Cooling Nom.				A															
Max				105.42	144.7	162.48	212.9	210.15	196	287.44	318.3	323.53	425.9	392	496	588			
Power supply Phase/Frequency/Voltage				Hz/V															
				3~/50/400															

performances according to CSS software 10.27

# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



EWWH-DZ

Microtech 4



More details and final information can be found by scanning or clicking the QR codes.



EWWH-DZXS

Cooling Only				EWWH-DZXS												
				230	320	380	430	455	460	640	755	920	945	C11	C13	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	227.08	318.33	376.33	455.13	454.66	474.48	637.15	752.27	917.79	945.8	1,126	1,352
	ηs,c			%	330	346		342		339	352	354	353	360.2	359.4	364.2
SEER					8.78	8.66	8.67	8.8	8.78	8.32	9.04	9.07	9.06	9.02	9.04	9.13
Cooling capacity	Nom.			kW	227	318	376	455		461	637	752	918	945.8	1,126	1,352
Power input	Cooling Nom.			kW	45.6	60.5	71.4	93.3	90.6	79.3	120.5	142.1	158.8	181	216.5	237.7
Capacity control	Method			Variable										Stepless		
	Minimum capacity			%	24	21	20	13	12	20	11	10		11		
EER					4.98	5.27		4.88	5.02	5.81	5.29		5.78	5.22	5.2	5.69
ESEER					7.78	7.97	7.98	7.89	8.06	7.76	8.26	8.3	8.16	-		
IPLV					9.37	9.52	9.56	9.44	9.5		9.74	9.78	9.74	9.54	9.57	9.71
Dimensions	Unit	Height		mm	1,865			1,985			2,200		2,083	2,225	2,290	
		Width		mm	1,055			1,160			1,270		1,510			
		Length		mm	3,625			3,585			3,580		4,793	4,768	4,812	
Weight	Unit			kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	3,800	4,350	4,750	5,500
	Operation weight			kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	4,579	5,020	5,540	6,570
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume			l	70	96	107		134		156	199	229	271.8	317.4	444.3
	Water flow rate	Cooling	Nom.	l/s	10.8	15.2	18	20.5	21.7	22	30.4	35.9	43.9	45.2	53.8	64.6
Water heat exchanger - condenser	Type			Shell and tube												
	Water volume			l	83	100	120		170	188	211	263	320	359.9	442.6	603.6
	Water flow rate	Cooling	Nom.	l/s	13	18.1	21.4	24.5	26.1	25.8	36.2	42.7	51.4	53.8	64.2	76
Compressor	Type			Driven vapour compressor												
	Quantity			1			2		1	2		3				
	Sound power level	Cooling	Nom.	dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	93.3	94.3	99	100	101
Sound pressure level	Cooling	Nom.	dB(A)	69.6	70.6	71.6	72.6		73.6		74.6	75.6	80	81	82	
Operation range	Evaporator Cooling	Min.~Max.		°CDB	4~20											
	Condenser Cooling	Min.~Max.		°CDB	20~55		20~42		20~55		20~42		20~55		20~42	
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	120			180			230		320	340	390	
	Circuits			Quantity	1											
Refrigerant charge				TCO2Eq	1			2		-						
Piping connections				mm	139.7			168.3			219.1					
				mm	139.7			168.3			219.1		219.1			
Unit	Running current	Cooling	Nom.	A	72	99	112	133	144	125	198	222	249	297.8	339.2	374.1
Unit	Running current	Max		A	95	150	123	190		142	300	246	284	451	370	448
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

performances according to CSS software 10.27



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



EWWH-DZ

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWWH-DZXE



Cooling Only				EWWH-DZXE																
				245	345	405	470	480	490	685	740	810	955	C10	C12	C14				
Space cooling	A Condition Pdc (35°C - 27/19)			kW			241.98	339.33	401.93	460.88	483.83	486.57	678.69	741	802.77	944.73	1,033	1,226	2,172.91	
	ηs,c			%			331	350		335	345	344	356	344.6	358	356	364.2		371.8	
SEER							8.85	8.75	8.79	8.94	8.4	8.9	9.18	8.8	9.22	9.15	9.17		9.35	
Cooling capacity	Nom.			kW			242	339	402	487	474	484	679	741	803	945	1,033	1,226	1,417	
Power input	Cooling	Nom.		kW			47.9	63.4	75.1	98.7	79.5	95.1	126.3	144.6	149.4	159.2	192.9	229.5	238.3	
Capacity control	Method			Variable																
	Minimum capacity			%			24	20	19	12	20	12	10	12	9	10	11		17	
EER							5.05	5.35		4.93	5.97	5.09	5.37	5.13	5.37	5.93	5.35	5.34	5.94	
ESEER							7.78	8.02	8	7.75	7.83	8.04	8.22	-	8.27	8.23	-		-	
IPLV							9.33	9.54	9.58	9.36	9.56	9.43	9.74	9.44	9.79	9.8	9.62	9.65	9.72	
Dimensions	Unit	Height		mm			1,865			1,985			2,082		2,200		2,083	2,225	2,290	
		Width		mm			1,055			1,160			1,510		1,270		1,510			
		Length		mm			3,625			3,585			4,688		3,580		4,793	4,768	4,812	
Weight	Unit			kg			1,750	1,950	2,050	2,850	2,650	2,850	3,000	4,400	3,700	3,900	4,700	5,100	5,900	
	Operation weight			kg			2,033	2,276	2,407	3,197	3,162	3,354	3,568	4,970	4,412	4,699	5,370	5,890	6,920	
Water heat exchanger - evaporator	Type			Flooded shell and tube																
	Water volume			l			70	96	107		134		156	207.3	199	229	317.4		444.3	
	Water flow rate		Cooling	Nom.	l/s			11.6	16.2	19.2	22.4	22.6	23.1	32.4	34.9	38.4	45.2	48.7	57.9	67
	Water pressure drop		Cooling	Nom.	kPa			29.7	28.4		37.8	30.8	32	41.3	31	38.1	36.9	37	38	33
Water heat exchanger - condenser	Type			Shell and tube																
	Water volume			l			83	100	120		188	170	211	326.4	263	320	359.9	442.6	603.6	
	Water flow rate		Cooling	Nom.	l/s			13.9	19.2	22.8	26.7	26.4	27.7	38.5	41.8	45.5	52.8	57.8	68.8	78.4
	Water pressure drop		Cooling	Nom.	kPa			28	34	31	42	18	26	29	21	28	23	33	30	26
Compressor	Type			Driven vapour compressor																
	Quantity						1			2	1	2	3	2		3				
Sound power level	Cooling		Nom.	dB(A)			87.9	88.9	89.9	91.1		91	92	98	93.3	94.3	99	100	101	
	Sound pressure level		Nom.	dB(A)			69.6	70.6	71.6	72.6		73.6	79	74.6	75.6	80	81	82		
Operation range	Evaporator Cooling		Min.~Max.	°CDB			4~20													
	Condenser Cooling		Min.~Max.	°CDB			20~55	20~42	20~55	20~42	20~55			20~42	20~55	20~42				
Refrigerant	Type/GWP			R-1234(ze)/7																
	Charge			kg			130			120	190	200		350	250	400	420	470		
	Circuits			Quantity			1													
Refrigerant charge				TCO2Eq			1						2							
Piping connections				mm			139.7			168.3			219.1							
				mm			139.7			168.3			219.1			168.3	219.1			
Unit	Running current	Cooling	Nom.	A			75	103	117	142	125	150	205	277	232	249	311	249		
Unit	Running current	Max		A			95	150	123	190	142	190	300	286	246	284	451	370	448	
Power supply	Phase/Frequency/Voltage			Hz/V			3~/50/400													

performances according to CSS software 10.27



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.



EWWS-DZXS

Cooling Only				EWWS-DZXS																
				320	440	530	610	640	700	880	C10	C13	C14	C15	C21					
Space cooling	A Condition Pdc (35°C - 27/19)			kW	315.85	438.98	520.21	629.71	630.64	694.46	875.77	1,043.15	1,304.67	1,390.46	1,549.85	2,027.16				
	ηs,c			%	3.416	3.376	3.54	3.448	3.508	3.428	3.508	3.636	3.448	3.624	3.552	3.608				
SEER					8.74	8.64	9.05	8.82	8.97	8.77	8.97	9.29	8.82	9.26	9.08	9.22				
Cooling capacity	Nom.			kW	316	439	520	609	631	694	876	1,043	1,305	1,390	1,550	2,027				
Power input	Cooling	Nom.		kW	67.1	90	103	126	132	127	177	205	270	257	312	384				
Capacity control	Method				Variable															
	Minimum capacity			%	30	21		16	15	18	11		7	9	8	6				
EER					4.71	4.88	5.05	4.82	4.77	5.44	4.92	5.08	4.82	5.4	4.96	5.27				
IPLV					9.31	9.25	9.61	9.29	9.44	9.77	9.45	9.83	9.1	9.96	9.38	9.34				
Dimensions	Unit	Height	mm	1,865				1,985				2,200		2,083		2,225		2,290		
		Width	mm	1,055				1,160				1,270		1,510		1,270		1,510		
		Depth	mm	3,625				3,585				3,580		4,793		3,580		4,768		4,812
Weight	Unit			kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	4,350	3,800	4,750	5,500				
	Operation weight			kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	5,020	4,579	5,540	6,570				
Water heat exchanger - evaporator	Type			Flooded shell and tube																
	Water volume			l	70	96	107		134		156	199	272	229	317	444				
	Water flow rate	Cooling	Nom.	l/s	15.3	21.3	25.2	29.1	30.6	33.7	42.5	50.5	63.1	67.4	75	98.1				
Water heat exchanger - condenser	Water pressure drop	Cooling	Nom.	kPa	47.3	40.9	44.8	59.1	51.1	61.7	64.5	59.3	59.5	74.4	61.3	70.4				
	Type			Flooded Shell & Tube																
	Water volume			l	83	100	120		170	188	211	263	360	320	443	604				
Compressor	Water flow rate	Cooling	Nom.	l/s	18.4	25.4	30.1	34.9	36.8	39.6	50.8	60.2	75.9	79.5	89.9	116				
	Water pressure drop	Cooling	Nom.	kPa	49.4	60.4	54.5	74.2	46.5	42.1	51.5	50.4	56.1	53.4	43.7	55.7				
Sound power level	Type			Driven vapour compressor																
	Quantity				1			2		1		2		3		2		3		
Sound pressure level	Cooling	Nom.	dBA	87.9	88.9	89.9	91.1	91.0	91.1	92.0	93.3	93.5	94.3	94.8	95.8					
Refrigerant	Type/GWP			R-513A/631																
Piping connections	Charge			kg	120	150	120	140	190	180	200	230	240	230	270					
	Circuits	Quantity			1															
Piping connections			mm	139.7				168.3				219.1								
			mm	139.7				168.3				219.1								



# Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.




EWWS-DZXE

Cooling Only				EWWS-DZXE															
				340	470	570	670	680	740	950	C10	C11	C14	C15	C17	C22			
Space cooling	A Condition Pdc (35°C - 27/19)	kW		336.72	471.24	558.03	676.76	674.49	728.69	941.72	1,024.55	1,117.07	1,419.67	1,450.66	1,652.82	2,128.56			
		ηs,c		3.428	3.396	3.568	3.452	3.52	3.464	3.532	3.444	3.664	3.464	3.668	3.556	3.656			
SEER				8.77	8.69	9.12	8.83	9	8.86	9.03	8.81	9.36	8.86	9.37	9.09	9.34			
Cooling capacity	Nom.	kW		337	471	558	671	674	729	942	1,025	1,117	1,420	1,451	1,653	2,129			
Power input	Cooling	kW		70.2	95.1	108	139		129	188	209	215	287	259	324	385			
Capacity control	Method		Variable																
	Minimum capacity		%	29	20		15		17	10			7	9	7	6			
EER				4.8	4.96	5.15	4.8	4.85	5.61	5.01	4.89	5.18	4.94	5.6	5.1	5.52			
IPLV				9.22	9.2	9.59	9.11	9.31	9.78	9.38	9.25	9.81	9.12	9.98	9.4	9.41			
Dimensions	Unit	Height	mm	1,865				1,985			2,082	2,200	2,083	2,200	2,225	2,290			
		Width	mm	1,055			1,160			1,510	1,270	1,510	1,270	1,510					
		Depth	mm	3,625				3,585			4,688	3,580	4,793	3,580	4,768	4,812			
Weight	Unit	kg		1,750	1,950	2,050	2,850		2,650	3,000	4,400	3,700	4,700	3,900	5,100	5,900			
		Operation weight		kg	2,033	2,276	2,407	3,197	3,354	3,162	3,568	4,970	4,412	5,370	4,699	5,890	6,920		
Water heat exchanger - evaporator	Type		Flooded shell and tube																
	Water volume		l	70	96	107		134			156	207	199	272	229	317	444		
	Water flow rate	Cooling	Nom.	l/s	16.3	22.9	27	32	32.7	35.3	45.6	49.6	54.1	68.8	70.3	80.1	102		
Water heat exchanger - condenser	Type	Cooling	Nom.	Water pressure drop		Flooded Shell & Tube													
				kPa		54.1	47.2	51.3	71.4	58.3	67.8	74.1	61.2	67.7	70.6	80.8	69.7	77.4	
				l/s		19.6	27.3	32.1	38.4	39.2	41.4	54.4	59.5	64.2	82.3	82.5	95.5	121	
Compressor	Type	Cooling	Nom.	Driven vapour compressor															
				Quantity		1			2		1	2	3	2	3	2	3		
				dBA		87.9	88.9	89.9	91.1	91.0	91.1	92.0	92.6	93.3	93.5	94.3	94.8	95.8	
Refrigerant	Type/GWP	Cooling	Nom.	R-513A/631															
				Charge		160		130		200		190	200	270	250	270	250	300	355
				Circuits		1													
Piping connections			mm																
			139.7				168.3			168.3			219.1			219.1			

# Water cooled centrifugal chiller, high efficiency, standard sound

- › Optional Variable Frequency Drive (VFD) to improve the part load efficiency
- › High efficiency flooded type shell and tube evaporator/condensers
- › Lower equipment, installation and annual operating costs than two single compressor chillers
- › Main components can be removed or repaired without shutting down the unit as the chiller has two of everything (compressors, lubrication systems, control systems and starters)
- › Unloading to 5% of full load provides improved stability of the chilled water temperature and less harmful cycling of compressors
- › Single stage centrifugal compressor (DWSC)

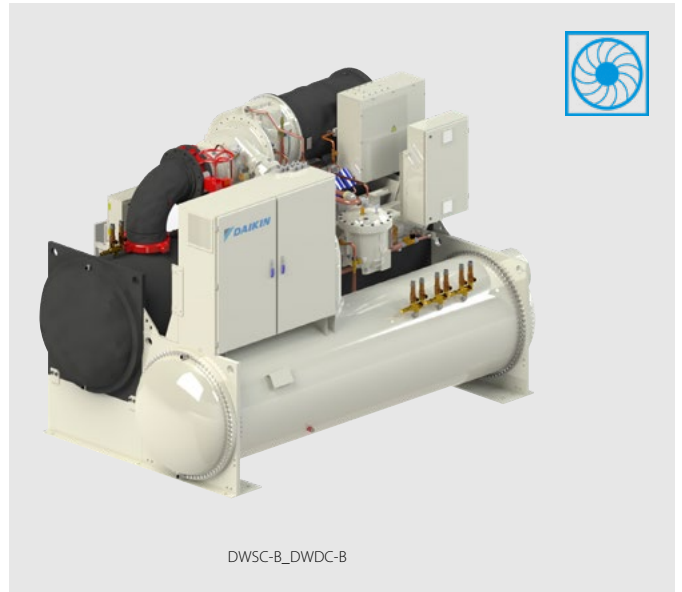

More details and final information can be found by scanning or clicking the QR codes.



DWSC B vintage




DWDC B vintage

Cooling Only		DWSC B vintage/DWDC B vintage	DWSC B vintage.	DWDC B vintage.
Cooling capacity	Min./Max.	kW	1,050 (1)/4,500 (2)	2,100 (3)/9,000 (4)
Compressor	Type		Single stage centrifugal compressor	
Refrigerant	Type		R-134a / R-513A	
Power supply	Frequency	Hz	50/60	

(1)300 RT | (2)1250 RT | (3)600 RT | (4)2500 RT

# Water cooled centrifugal chiller, high efficiency, standard sound

- › Single Compressor chiller
- › High part load efficiency with Daikin VFD Unit Mounted - Refrigerant Cooled
- › Low Harmonics VFD option
- › Excellent Full Load performance
- › Unloading down to 10% without Hot Gas By Pass
- › Refrigerant flexibility with R-134a, R-1234ze and R-513A
- › Reduced refrigerant quantity
- › Touch screen operator panel
- › Unit mounted control panel
- › Rapid restart for fast start-up after power loss
- › Heat pump mode

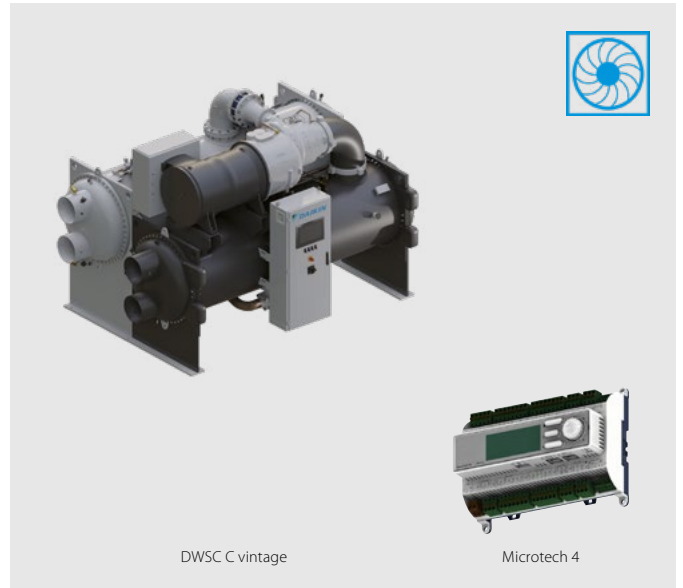

DWSC C vintage

Microtech 4



## Rapid restart for fast start-up after power loss

The UPS keeps the controller switched on enabling the unit to quickly reach the full load. Focused on data center and all applications where the cooling capacity supply is crucial.



## Reduced refrigerant quantity

Thanks to the new high efficiency tubes and more compact heat exchanger design.



## Heat pump mode

With reversibility on water side whenever a heating load is demanded thus improving suitability for applications with changing load during the year.

## Touch screen operator panel



Touch screen operator panel is graphically intuitive and easy to use for enhanced operator productivity. Important status and control information is available at a glance or a touch.

## Unit mounted control panel



More details and final information can be found by scanning or clicking the QR codes.



DWSC C vintage

Cooling Only		DWSC C vintage	DWSC C vintage	DWSC C vintage
Cooling capacity	Min./Max.	kW	1,050 (1)/4,500 (1)	700 (1)/3,300 (1)
Compressor	Type		Single stage centrifugal compressor	Single stage centrifugal compressor
Refrigerant	Type		R-134a / R-513A	R-1234(ze)
Power supply	Frequency	Hz	50/60	50/60

(1) AHRI conditions

## Accessories - Chillers

		Air-cooled chillers								
Panels		EWAQ~BVP EWYQ~BVP	EWAQ~AC EWYQ~AC	EWAQ~CA EWYQ~CA	EWA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAH~TZB & C	EWAD~TZB & C
EKDICMPAB	(a) (b) (c) iCM Primary Basic									
EKDICMPAL	(a) (b) (c) iCM Primary for evaporator peripherals Light								•	•
EKDICMPAF	(a) (b) (c) iCM Primary for evaporator peripherals Full								•	•
EKDICMPWL	(a) (b) (c) iCM primary Evaporator/Condenser Light									
EKDICMPWF	(a) (b) (c) iCM primary Evaporator/Condenser Full									
EKDICMCTL	(a) (b) iCM Cooling towers Light									
EKDICMCTF	(a) (b) iCM Cooling towers Full									
EKDICMPABIO	(a) (b) iCM Primary Basic with IO third party chiller								•	•
EKDICMPALIO	(a) (b) iCM Primary Evaporator Light with IO third party chiller								•	•
EKTSMS	Temperature sensor for master/slave configuration							•		
EKRUMCL1	User Interface	•								

		Air-cooled chillers								
Serial Cards & Communication Modules		EWAQ~BVP EWYQ~BVP	EWAQ~AC EWYQ~AC	EWAQ~CA EWYQ~CA	EWA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAH~TZB & C	EWAD~TZB & C
EKAC200J	Serial Card RS485/Modbus					•				
EKACBAC	Ethernet Card BACnet					•				
EKACLONP	Serial Card LON FTT 10					•				
EKACRS232	Serial Card RS232 Modem Interface (single unit only)					•				
EKACWEB	Web Server Card					•				
EKACBACMSTP	Serial Card BACnet MSTP					•				
EKACBACCERT	Serial Card BACnet pre-loaded IP/Ethernet (centrifugal chillers)									
EKACMSTPCERT	Serial Card BACnet pre-loaded MSTP (centrifugal chillers)									
EKCM200J	ModBus RTU communication module						•			
EKCM1LON	LON communication module						•	•	•	•
EKCMBACMSTP	BACnet/MSTP communication module						•			
EKCMBACIP	BACnet/IP communication module						•	•	•	•
EKDOSMWO	Daikin on Site Modem without M2M card					•	•	•	•	•

		Air-cooled chillers								
Other Systems & Accessories		EWAQ~BVP EWYQ~BVP	EWAQ~AC EWYQ~AC	EWAQ~CA EWYQ~CA	EWA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAH~TZB & C	EWAD~TZB & C
EKCON	Converter RS485 to RS232					•				
EKCONUSB	Converter RS485 to USB					•				
EKMODEM	Fixed modem					•				
EKGSMOD	GSM modem					•				
EKRUPCJ	Remote display kit					•				
EKRUPCS	Local/remote display HMI						•	•	•	•
EKPWPROEXT	PlantWatchPro I/O extension module for hardwiring and retrofit					•				
EKGWWEB	Gateway web (Ethernet LAN SNMP)					•				
EKGWMODEM	Gateway for modem					•				
EKAC10C	Address card for connection to BMS or Remote user interface									
EKRUMCA	Remote installed user interface									
EKLS2	(d) Low noise kit 22/28/35/45/55/65 Hp-units									
ECB2MUCW	(e) Controller kit									
ECB3MUCW	(e) Controller kit									
EKRPIAHT	(g) Digital input/output PCB			CF						
EKRUAHTB	(g) Remote user interface			CF						
DTA104A62	(f) External control adapter			CF						
BHGP26A1	(f) Digital pressure gauge kit			CF						
EKQDP2M016	(g) Differential Pressure Sensor 4-20 mA 0-160 kPa							•	•	•
EKQDP2M020	(g) Differential Pressure Sensor 4-20 mA 0-250 kPa							•	•	•
EKQDP2M040	(g) Differential Pressure Sensor 4-20 mA 0-400 kPa							•	•	•
EKQDP2M060	(g) Differential Pressure Sensor 4-20 mA 0-600 kPa							•	•	•
EKDAPCONT	Containerization of one unit					•	•	•	•	•
EKDAPSTF	Containerization of additional units in the same container					•	•	•	•	•

### Notes:

- (a) Price **does not** include commissioning of panel; if commissioning is required please refer to RN17-041
- (b) iCM panels work in **cooling mode only**; heat pump versions, total heat recovery and Free cooling options on A/C and W/C chillers are **not compatible**
- (c) In case you are ordering iCM panels please add corresponding modbus RTU communication module (EKCM200J or EKAC200J) for each chiller unit controller
- (d) For 45/55/65 Hp-units 2 pieces are needed
- (e) Only available for modular units (EWWP~KAW1M)
- (f) Price available in SAP system
- (g) Differential pressure sensor are specific for iCM panels in variable primary flow management



						Water-cooled chillers							Centrifugals		
EWAD~T-C	ERAD~E	EWYQ~F	EWYQ~G- EWYQ~F	EWAT~B-	EWAD~CF	EWQ~KB	EWLQ~KB	EW_Q-G EW_Q-L	EWLD~I-	EWWS/H/D~J- EWLS/H/D~J-	EWVH~VZ	EWWD~VZ	EWVH~DZ	EWWD~DZ	DWSC & DWDC
•				•				•	•	•	•	•	•	•	•
•				•	•			•	•	•	•	•	•	•	•
•				•	•			•	•	•	•	•	•	•	•
								•			•	•	•	•	•
								•			•	•	•	•	•
								•			•	•	•	•	•
								•			•	•	•	•	•
•				•							•	•	•	•	•
•				•							•	•	•	•	•
		•	•	•				•							

						Water-cooled chillers							Centrifugals		
EWAD~T(C)	ERAD~E	EWYQ~G-	EWYQ~G- EWYQ~F	EWAT_B- (single)	EWAD~CF	EWQ~KB	EWLQ~KB	EW_Q-G EW_Q-L	EWLD~I-	EWWD~J- EWLD~J-	EWVH~VZ A	EWWD~VZ A	EWVH~DZ	EWWD~DZ	DWSC & DWDC
															•
															•
															•
															•
	•	•	•	•	•			•	•	•	•	•	•	•	
•	•	•	•	•	•			•	•	•	•	•	•	•	
•	•	•	•	•	•			•	•	•	•	•	•	•	
•	•	•	•	•	•			•	•	•	•	•	•	•	

						Water-cooled chillers							Centrifugals		
EWAD~T(C)	ERAD~E	EWYQ~G-	EWYQ~G- EWYQ~F	EWAT_B- (single)	EWAD~CF	EWQ~KB	EWLQ~KB	EW_Q-G EW_Q-L	EWLD~I-	EWWD~J- EWLD~J-	EWVH~VZ A	EWWD~VZ A	EWVH~DZ	EWWD~DZ	DWSC & DWDC
															•
															•
															•
															•
•	•	•	•	•	•			•	•	•	•	•	•	•	•
															•
															•
															•
						•	•								
						•	•								
						•	•								
						•	•								
						•	•								
•				•	•			•	•	•	•	•	•	•	•
•				•	•			•	•	•	•	•	•	•	•
•				•	•			•	•	•	•	•	•	•	•
•				•	•			•	•	•	•	•	•	•	•
•	•	•	•	•	•			•	•	•	•	•	•	•	•



Daikin air handling units, with their plug-and-play design and inherent flexibility, can be configured and combined specifically to meet the exact requirements of any building, no matter what it is used for or who is to work there. Our systems are designed to be the most environmentally friendly and the most energy efficient on the market, thus reducing their ecological impact, while, at the same time, keeping costs down through the minimisation of energy consumption. When combined with the small physical footprint of the system, these features make our air handling units ideal for all markets.

# Table of content

# Air handling units

<b>Why choose Daikin air handling units?</b>	<b>132</b>
<b>Products overview</b>	<b>136</b>
Software and Eurovent certification	137
The working principle at a glance	138
D-AHU Modular T	140
D-AHU Modular L	141
D-AHU Modular R	142
D-AHU Modular P	143
D-AHU Professional	144
Daikin on Site	145
<b>UNIQUE</b> Daikin fresh air package	146



## Daikin air handling units

### Why choose Daikin air handling units?


- › Maximum energy efficiency and indoor air quality
- › Wide range of functions and options
- › **High quality** components
- › **Innovative** technology: Unique features and state of the art technology for short payback
- › Operation **efficiency** and **energy savings**
- › Outstanding **reliability** and **performance**
- › Various applications are possible including air conditioning applications, industry-type process cooling, and large-scale district heat source systems.
- › Plug and play concept for easy installation and commissioning
- › Unique Daikin fresh air package available for connection of AHU to VRV or ERQ

### Certifications


- › Eurovent certified performances
- › Exceeding 2018 ErP – ECODESIGN requirements
- › Certified according to the Hygiene Directive VDI 6022 (Modular L and Professional ranges)
- › Certified according to the Hygiene Directive DIN 1946 (Professional range)
- › RLT certified performances



Conventional design



Daikin design



### The unique quality of Daikin AHU is accomplished by:

#### Panels

- › The outer panel is Pre-painted with Corrosion Class RC5
- › The inner panel is made of Aluzinc with Corrosion Class RC4

#### Gasket

- › Liquid gasket technology drastically reduces unit air leakage

#### Frame

- › All anodized aluminium which has the highest corrosion resistance compared to natural aluminium
- › Unique Daikin thermal break (35mm or 27 mm thermal break). Polyamide bars design to enhance thermal break unit performances
- › Distinctive Section to section thermal break profile to ensure thermal break design on the whole unit (see image above)
- › Rounded profile for increased ease of cleaning

#### IAQ

- › Flush internal surface and rounded corner flush surface to avoid the retention of dirt and to be easily cleanable
- › Wide filtration possibility to reduce pollution

#### Plug & Play Controls

- › Pre-commissioned and Factory-tested control for quicker on site commissioning
- › Sole manufacturer to provide a complete AHU DX solution from a single manufacturer available for connection of AHU to VRV or ERQ (everything factory-mounted)

#### Certifications



- › Eurovent certified performances
- › Exceeding 2018 ErP - ECODESIGN requirements
- › Certified according to the Hygiene Directive VDI 6022 (Modular L and Professional ranges)
- › Certified according to the Hygiene Directive DIN 1946 (Professional range)
- › RLT certified performances

## Marketing tools

- › Watch the time-lapse video of a Daikin AHU construction on [www.youtube.com/daikineurope](http://www.youtube.com/daikineurope)
- › Watch the Modular L promotional video on [www.youtube.com/daikineurope](http://www.youtube.com/daikineurope)
- › Download our brochure on air handling units from [my.daikin.eu](http://my.daikin.eu)
- › Get the access to the selection tool <http://tools.daikinapplied.eu> to select your air handling units in a few clicks.
- › Download the Modular L “Daikin Air Design” App on the App stores for iOS and Android



- › Consult the “Argue Card” document to support in promoting the Modular L range (*available on request – refer to your Daikin AHU specialist*)

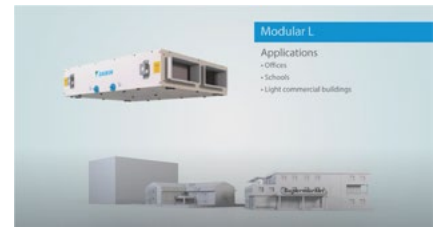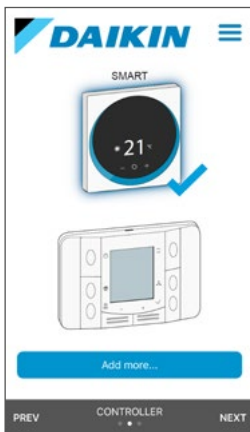

## Benefits for the installer

### Plug and play design

- › Pre-programmed and factory-tested controls for an easier and fast commissioning
- › Low voltage fast connectors in between AHU selections easiest on site unit assembly
- › Flush mounted electrical control panel avoiding risk of damage during transport and installation

### Daikin Fresh air package

- › Plug & Play connection of Professional or Modular AHU to Daikin VRV and ERQ
- › Factory-mounted package contains expansion valves, electronic interface and sensors.
- › Easy and fast commissioning

## Benefits for the consultant

### Quick selection tool

- › In-house developed web software with improved user interface and preset parameters ensure that you can always find the optimum and most energy efficient product for your application
- › Unlimited configuration option
- › Infinite variable sizing (increments of 1 cm)

## Benefits for the end user

### Customizable or standard

- › Amazing tailor made capability to meet the specific customer needs with the Professional range or fast availability thanks to the “make to stock” standard Modular L range

### Efficient control logic

- › Open communication protocols (BACnet and Modbus) that guarantee BMS, and ITM compatibility
- › Energy efficient controls with reduced energy and operating cost
- › Highest efficiency to have sensible saving on energy



SMART CONTROLS




DAMPER AND EC FAN



HEAT RECOVERY WHEEL AND FILTER




D-AHU MODULAR R  
INSTALLATION

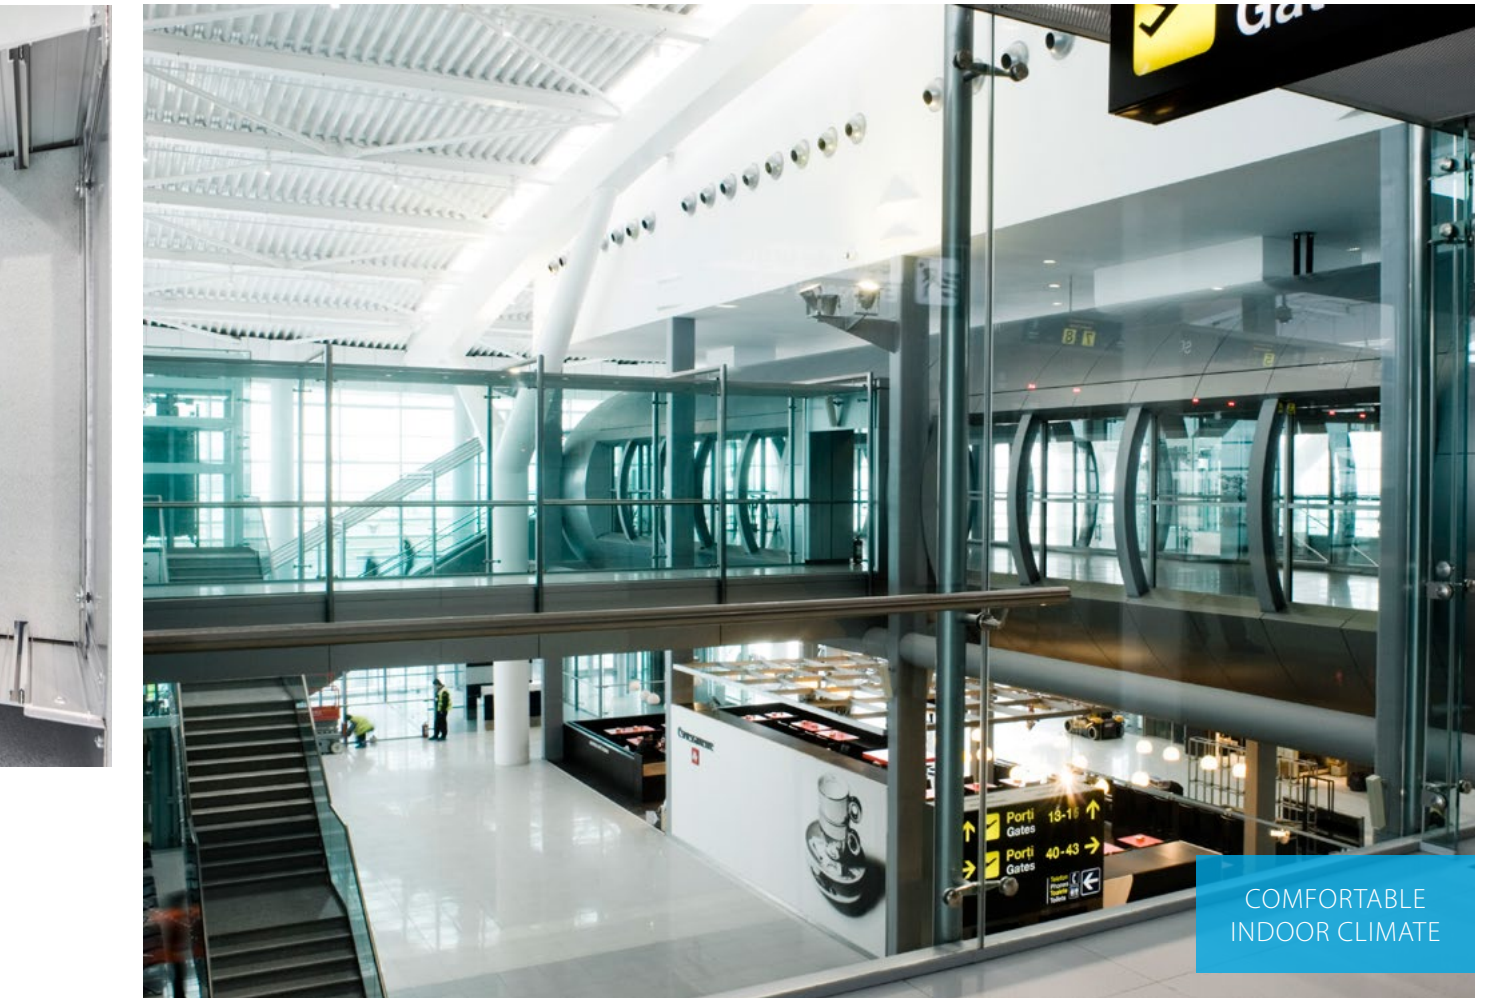


COMFORTABLE  
INDOOR CLIMATE

# Products overview

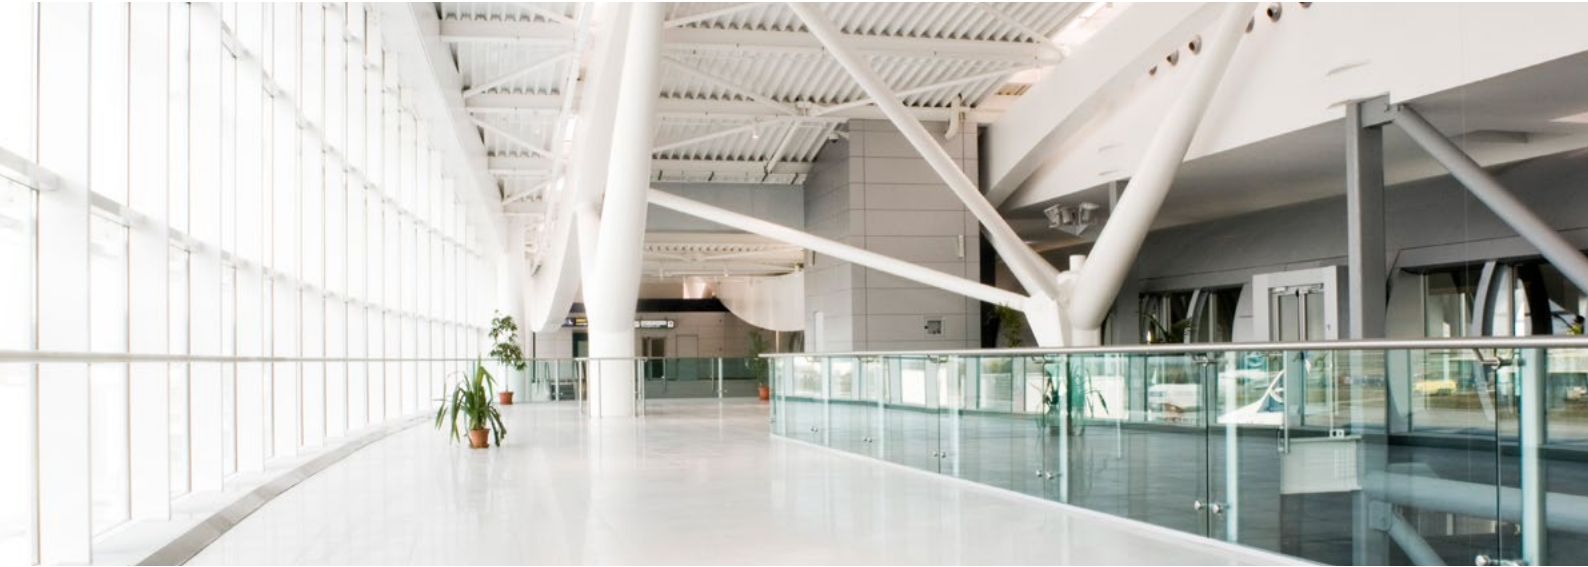

## Centralized and decentralized ventilation

### D-AHU Professional

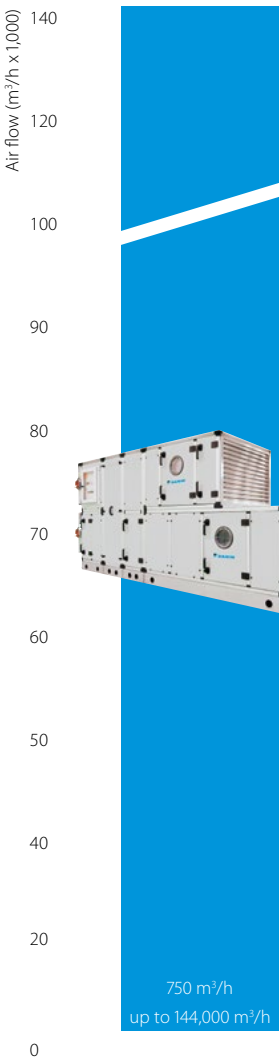

#### Professional

- › Infinite variable sizes
- › **Tailored to the individual customer**
- › Modular construction

50 years of European Design AHU manufacturing experience



#### Modular R

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › **Heat recovery wheel (sorption and sensible technology)**
- › **Compact design**



D-AHU Modular R

500 m<sup>3</sup>/h  
up to 25,000 m<sup>3</sup>/h

#### Modular P

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › **High efficiency aluminium counter flow plate heat exchanger**
- › **Compact design**



D-AHU Modular P

500 m<sup>3</sup>/h  
up to 25,000 m<sup>3</sup>/h

#### Modular L

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › **High efficiency aluminium counter flow plate heat exchanger**
- › **Low height unit**
- › **For false ceiling applications**



D-AHU Modular L

150 m<sup>3</sup>/h  
up to 3,400 m<sup>3</sup>/h

#### Modular T **PRELIMINARY**

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › Small footprint
- › Compact design
- › **High efficiency aluminium counter flow plate heat exchanger**
- › **Top connected unit**



D-AHU Modular T

200 m<sup>3</sup>/h  
up to 4,200 m<sup>3</sup>/h



## Selection software

### ASTRA Web

- › Quick AHU selection that will save you precious time, drastically reducing selection time through the new software interface.
- › Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- › High selection quality, thanks to the intelligence embedded within the software core.

Quickly select your air handling unit by following the wizard:

- 1 Select the series: D-AHU Professional, D-AHU Modular R, D-AHU Modular P, Modular L and Modular T
- 2 Insert the air flow supply and return
- 3 Insert the summer/winter air supply setpoint
- 4 Insert the summer/winter outdoor and extract temperature

You will get immediately your 3D result and it's ready to customize!

Now, you will be able to modify your unit (adding or changing components) in order to have a product that meets all your needs.

When finished a technical report, price list, fan curve chart can be generated. These final reports can be downloaded in different formats.



## Eurovent certification

Daikin Applied Europe S.p.A. participates in the Eurovent Certified Performance programme for Air Handling Units.

Check ongoing validity of certificate:

[www.eurovent-certification.com](http://www.eurovent-certification.com)

or [www.certiflash.com](http://www.certiflash.com)






Result Energy TermiC° S2&F2		Eurovent Classification according to EN1886				
<b>D1</b>	Casing strength class	D1	D2	D3		
	Max. relative deflection mm x m <sup>-1</sup>	4.00	10.00	EXCEEDING10		
<b>L1</b>	Casing air leakage class at -400 Pa	L1	L2	L3		
	Max. leakage rate (f <sub>400</sub> ) l x s <sup>-1</sup> x m <sup>-2</sup>	0.15	0.44	1.32		
<b>L1</b>	Casing air leakage lass at +700 Pa	L1	L2	L3		
	Max. leakage rate (f <sub>700</sub> ) l x s <sup>-1</sup> x m <sup>-2</sup>	0.22	0.63	1.90		
<b>F9</b>	Filter bypass leakage class	F9	F8	F7	F6	G1 TO F5
	Max. filter bypass leakage rate k in % of the volume flow rate	0.50	1	2	4	6
<b>T2</b>	Thermal transmittance	T1	T2	T3	T4	T5
	(U) W x m <sup>-2</sup> x K <sup>-1</sup>	U <= 0.5	0.5 < U <= 1	1 < U <= 1.4	1.4 < U <= 2	No requirements
<b>TB2</b>	Thermal bridging factor	TB1	TB2	TB3	TB4	TB5
	(kb)	0.75 < K <sub>b</sub> <= 1	0.6 < K <sub>b</sub> <= 0.75	0.45 < K <sub>b</sub> <= 0.6	0.3 < K <sub>b</sub> <= 0.45	No requirements

# The working principle at a glance

Typical configurations for Daikin air handling units provide a versatile range of functions. Our system offers numerous options for customisation through an extensive range of variations and added functionality.

## Supply side

- 1 Damper section including ventilation grilles, factory-mounted actuators
- 2 Premium efficiency filters with factory-mounted differential pressure manometer
- 3 Heat recovery system (cross flow and counter flow plate heat exchanger or rotary heat exchanger)
- 4 Mixing box with damper and factory-mounted actuators
- 5 Heating/cooling coil section with stainless steel condensate tray and drip protection
- 6 Supply air fan, EC technology (with hinged door, opening drive monitoring, mounted and cabled lighting and ON/OFF switch)

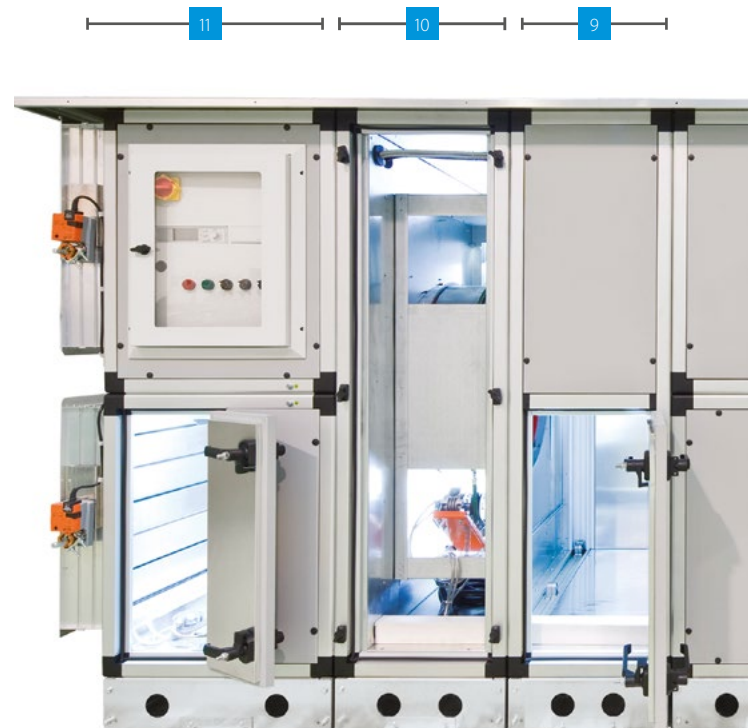

### Fans

- › EC plug fan
- › Forward curved fan
- › Backward curved fan
- › Backward airfoil blades fan
- › Plug fan

### Exchangers

- › Water coils
- › Steam coils
- › Direct expansion coil
- › Superheated water coils
- › Electric coils

### Humidifiers



- › Evaporative humidifier without pump (loss water)
- › Evaporative humidifier with re-circulating pump
- › Air washer without pump (loss water)
- › Air washer with re-circulating pump
- › Steam humidifier with direct steam production
- › Steam humidifier with local distributor
- › Atomized water spray humidifier

### Plug and Play control solution

- › Air flow control
- › Air temperature control
- › Chilled water and DX cooling system control
- › Free cooling
- › CO<sub>2</sub> automatic control
- › Air temperature control (supply, return, ambient)
- › Variable Air Volume (VAV) and Constant Air Volume (CAV) systems

### Unique section to section thermal break profile

- › Thermal bridge free for the entire AHU
- › Smooth interior surface with improved IAQ (Indoor Air Quality)

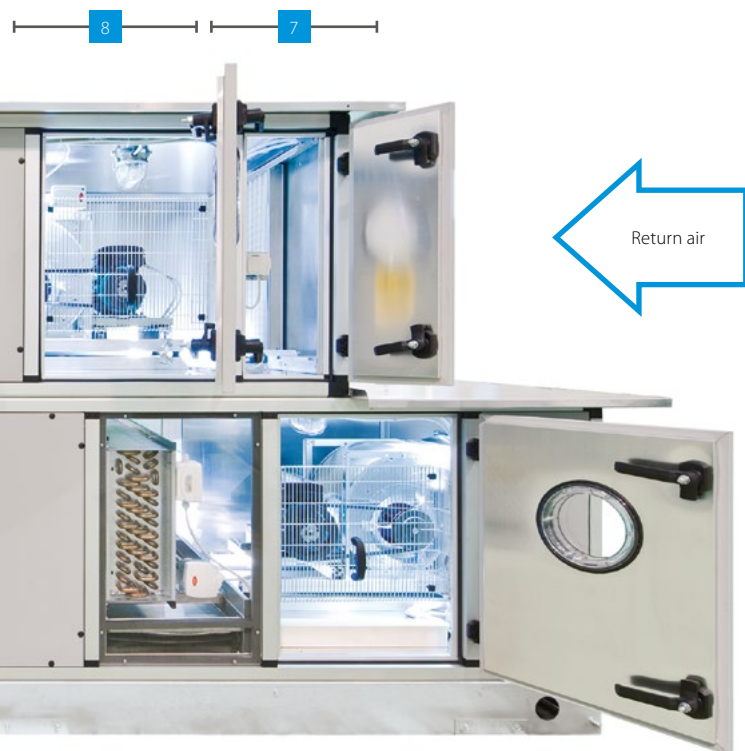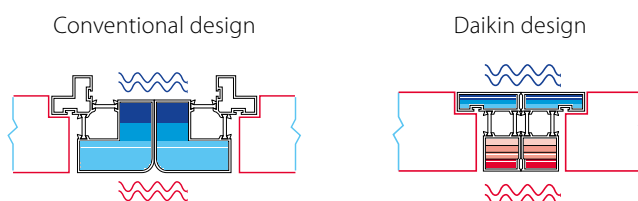

### Return side

- 7** Premium efficiency filters with factory-mounted differential pressure manometer
- 8** Exhaust air fan, EC technology (with hinged door, opening drive monitoring, mounted and cabled lighting and ON/OFF switch)
- 9** Mixing box with damper and factory-mounted actuators
- 10** Heat recovery system (cross flow and counter flow plate heat exchanger or rotary heat exchanger)
- 11** Damper section including ventilation grilles, factory-mounted actuators

### Heat recovery systems

- › Heat wheel, sensible or sorption
- › Cross flow and Counter flow plate heat exchangers
- › Run-around coils

### Other section

- › Attenuator section
- › Mixing box section with actuators or manual controlled dampers
- › Empty section

### Filters

- › Synthetic pleated filter
- › Flat filter aluminium mesh
- › Rigid bag filter
- › Soft bag filter
- › High efficiency filter
- › Carbon absorption filter
- › Carbon deodorizing filter

### Accessories

- › Control features
- › Frost protection
- › Manometers
- › Drive guard
- › Roof
- › ...

# Modular T


Top connected heat recovery unit

## Highlights

- › 5 Predefined sizes
- › Plug & Play control solution
- › Compact unit from 550 mm width (for unit up to 1100 m<sup>3</sup>/h)
- › Wide air flow coverage from 200 to 4200 m<sup>3</sup>/h
- › Excellent indoor air quality (IAQ). Up to three filtration stages: more than 90% PM1 in outdoor air are deleted achieving the best IAQ
- › Low noise emission thanks to superior panel construction (50mm, mineral wool)
- › DX and water coil available as option
- › Recirculation mixing damper (option)



## Air flow range - preliminary data

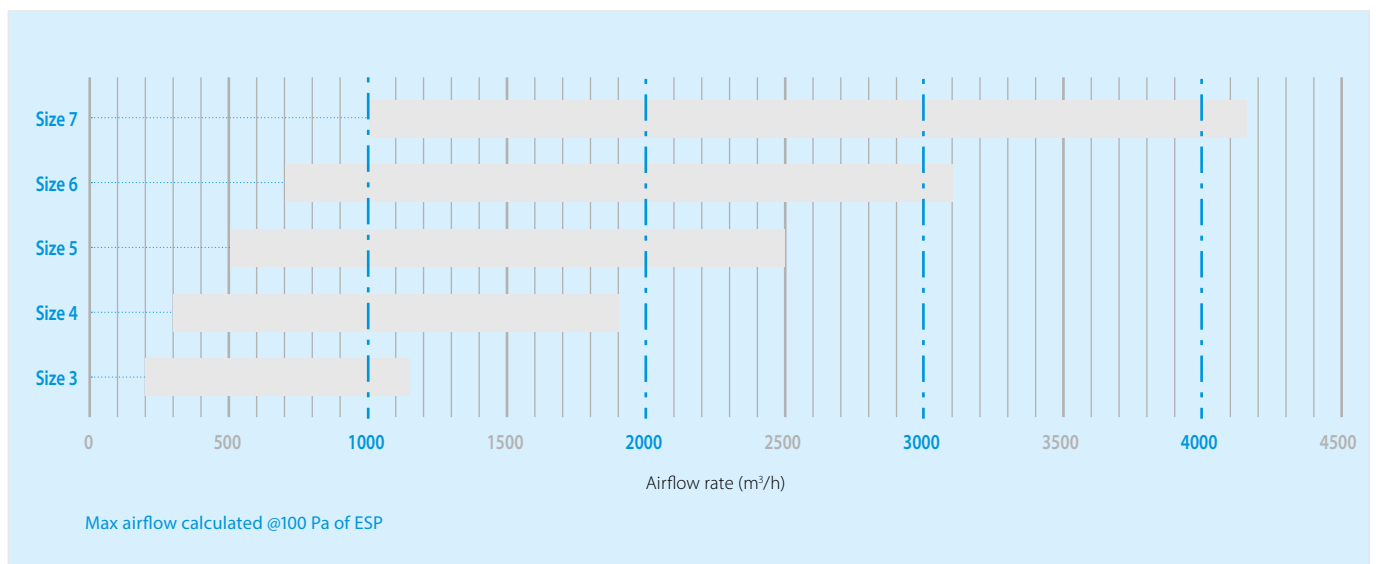


# Modular L

Premium efficiency heat recovery unit

## Highlights

- › 6 Predefined sizes
- › Exceeding 2018 ErP – ECODESIGN requirements
- › Plug & Play control solution
- › Compact unit from 280 mm height (for unit up to 550 m<sup>3</sup>/h)
- › Wide air flow coverage from 150 to 3400 m<sup>3</sup>/h
- › Excellent indoor air quality (IAQ). Up to ePM1 80% (F9) filtration level with possibility to have a pre-filter up to ePM1 50% (F7) for the best IAQ
- › Low noise emission thanks to superior panel construction (50mm, mineral wool)
- › EPBD compliant
- › BIM file available at [www.daikin.eu/BIM](http://www.daikin.eu/BIM)

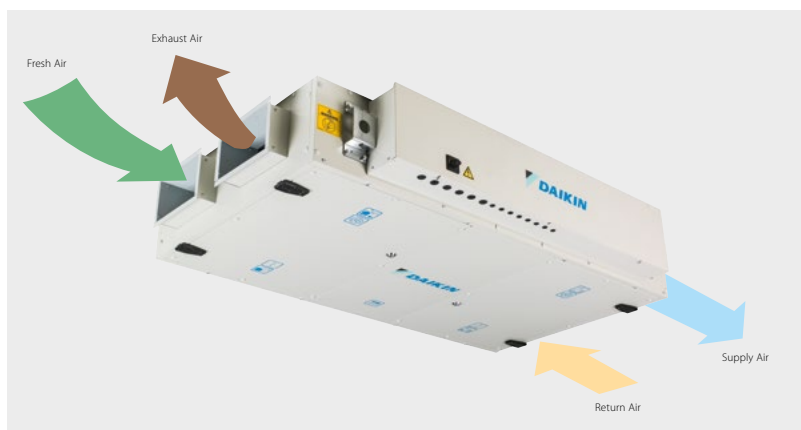

## EC centrifugal fan

- › Inverter driven with IE4 premium efficiency motor
- › High-efficient blade profiling
- › Reduced energy consumption
- › Optimized SFP (Specific Fan Power) for an efficient unit operation
- › Maximum ESP available 550 Pa (depending on model sizes and air-flow)

## Heat exchanger

- › Premium quality counter flow plate heat exchanger
- › Up to 92% of the thermal energy recovered
- › High grade aluminium allowing high grade corrosion protection



More details and final information can be found by scanning or clicking the QR codes.



ALB-RB

## Technical details

D-AHU Modular L			ALB02*B	ALB03*B	ALB04*B	ALB05*B	ALB06*B	ALB07*B
Airflow		m <sup>3</sup> /h	300	600	1,200	1,600	2,500	3,000
Heat exchanger thermal efficiency <sup>1</sup>		%	90		91	90	91	90
External static pressure	Nom.	Pa	100					
Current	Nom.	A	0.61	1.35	2.26	2.83	2.09	6.22
Power input	Nom.	kW	0.14	0.31	0.52	0.65	1.17	1.43
SFPv <sup>2</sup>		kW/m <sup>3</sup> /s	1.25	1.52	1.3	1.35	1.47	1.51
Electrical supply	Phase	ph	1					
	Frequency	Hz	50/60					
	Voltage	V	220/240 Vac					
Main unit dimensions	Width	mm	920	1,100	1,600		2,000	
	Height	mm	280	350	415		500	
	Length	mm	1,660	1,800	2,000			
Rectangular duct flange	Width	mm	250	400	500		700	
	Height	mm	150	200	300		400	
Weight unit		kg	125	180	270	280	355	360

1. Winter design condition: Outdoor: -10°C, 90% Indoor: 22°C, 50%

2. SFPv is a parameter that quantifies the fan efficiency (the lower it is the better will be). This reduces if airflow decreases.

3. Electrical current is based on 230V

# Modular R

## Highlights

- › 10 Predefined sizes
- › IE4 premium efficiency motor
- › Compact design
- › Advanced control features
- › Easy installation
- › Indoor air quality compliant with VDI 6022 hygiene guideline
- › Operating limits from -25 °C, -40 °C with electric heaters, up to +46 °C ambient temperature
- › VRV IV and ERQ coupling capability
- › Indoor and outdoor versions
- › Free cooling capability
- › Economy and Night mode operation
- › Monitoring and control through Daikin iTM
- › Nominal air flow programmed at factory
- › Air flow or pressure control (Variable Air Volume – Constant Air Volume)



## Heat exchanger

- › High efficiency heat wheel
- › Available in two versions: sorption and sensible technology
- › Up to 81% of the thermal energy recovered

## Simple, quick installation

The Modular series' plug and play design is more than just a convenient feature for installers. It offers cost-saving benefits as there is no need for expensive adjustments before the unit is commissioned. Plug and play makes everyone's life simpler, safer and more economical.

More details and final information can be found by scanning or clicking the QR codes.



Modular R

D-AHU Modular R			1	2	3	4	5	6	7	8	9	10
Airflow		m <sup>3</sup> /h	1,200	1,700	2,700	4,100	5,500	6,100	7,000	9,100	11,500	15,000
Temp. efficiency winter		%	80	79.7	80.1	80.2	80.7	80.1	80.7	80.8	80.5	80.6
External static pressure	Nom.	Pa	200	200	200	200	200	200	200	200	200	200
Current	Nom.	A	2.59	3.65	3.13	4.95	6.4	7.78	8.78	10.48	14.23	19.03
Power input	Nom.	kW	0.6	0.84	1.25	1.98	2.56	3.11	3.51	4.19	5.69	7.61
SFPv		kW/m <sup>3</sup> /s	1.553	1.507	1.451	1.521	1.387	1.549	1.525	1.432	1.487	1.551
Electrical supply	Phase	ph	1	1	1	1	1	1	1	1	1	1
	Frequency	Hz	50	50	50	50	50	50	50	50	50	50
	Voltage	V	230	230	400	400	400	400	400	400	400	400
Dimensions unit	Width	mm	720	820	990	1,200	1,400	1,400	1,600	1,940	1,940	2,300
	Height	mm	1,320	1,320	1,540	1,740	1,740	1,920	1,920	2,180	2,460	2,570
	Length	mm	1,700	1,700	1,800	1,920	2,080	2,280	2,400	2,450	2,280	2,400
Weight unit		kg	325	350	475	575	750	790	950	1,330	1,410	1,750

# Modular P

## Highlights

- › 10 Predefined sizes
- › IE4 premium efficiency motor
- › Compact design
- › Advanced control features
- › Easy installation
- › Indoor air quality compliant with VDI 6022 hygiene guideline
- › Operating limits from -25 °C, -40 °C with electric heaters, up to +46 °C ambient temperature
- › VRV IV and ERQ coupling capability
- › Indoor and outdoor versions
- › Free cooling capability
- › Economy and Night mode operation
- › Monitoring and control through Daikin iTM
- › Nominal air flow programmed at factory
- › Air flow or pressure control (Variable Air Volume – Constant Air Volume)



Modular P

## Modular Design

Modular design allows to add at the base module accessories and components such as coil, attenuator, electrical heater in order to meet all customer requests.

## Heat exchanger

- › Premium quality counter flow plate heat exchanger
- › Up to 92 % of the thermal energy recovered
- › No cross contamination

More details and final information can be found by scanning or clicking the QR codes.



Modular P

D-AHU Modular P			1	2	3	4	5	6	7	8	9	10
Airflow		m <sup>3</sup> /h	1,100	1,600	2,400	3,100	3,700	4,750	5,500	8,000	10,400	12,500
Thermal efficiency		%	91	91.5	92	91.9	91.9	92.2	92.3	91.7	93.1	93.1
External static pressure	Nom.	Pa	200	200	200	200	200	200	200	200	200	200
Current	Nom.	A	1.78	2.48	2.08	2.73	3.45	4.58	5.25	7.53	9.55	11.55
Power input	Nom.	kW	0.41	0.57	0.83	1.09	1.38	1.83	2.1	3.01	3.82	4.62
SFPv		kW/m <sup>3</sup> /s	1.183	1.092	1.09	1.113	1.188	1.21	1.207	1.216	1.148	1.166
Electrical supply	Phase	ph	1	1	1	1	1	1	1	1	1	1
	Frequency	Hz	50	50	50	50	50	50	50	50	50	50
	Voltage	V	230	230	400	400	400	400	400	400	400	400
Dimensions unit	Width	mm	720	820	990	1,200	1,400	1,400	1,600	1,940	1,940	2,300
	Height	mm	1,320	1,320	1,540	1,740	1,740	1,920	1,920	2,180	2,460	2,570
	Length	mm	2,030	2,200	2,610	2,660	2,800	3,210	3,340	3,840	4,060	4,190
Weight unit		kg	343	358	512	604	785	852	964	1,449	1,700	2,071

# Professional

Flexible solution for custom applications

## Flexible design

Daikin Professional air handlers are tailored to your needs, optimizing always the unit for the most cost-effective selection and manufacturing standardization.

- > Air flow from 750 m<sup>3</sup>/h up to 144,000 m<sup>3</sup>/h.
- > All the units can be modularly designed to facilitate the transport and the assembly on site.
- > New features available as counter flow plate heat exchanger, biocide filters...



## Variable dimensioning

Size	Airflow (m <sup>3</sup> /h)	Height - mm	Width - mm
1	1,800	640	720
2	2,200	640	810
3	3,500	740	980
4	5,400	840	1,190
5	6,600	840	1,390
6	7,600	940	1,390
7	9,000	1,090	1,380
8	11,000	1,150	1,550
9	14,000	1,270	1,720
10	18,300	1,390	1,970
11	23,800	1,570	2,190

Size	Airflow (m <sup>3</sup> /h)	Height - mm	Width - mm
12	29,800	1,690	2,480
13	33,800	1,870	2,510
14	43,200	1,990	2,940
15	51,000	2,110	3,230
16	63,000	2,290	3,620
17	68,000	2,290	3,890
18	77,000	2,290	4,410
19	87,000	2,410	4,660
20	95,400	2,470	4,960
21	111,200	2,590	5,460
22	127,000	2,650	6,060

### Example

Airflow (m <sup>3</sup> /h)	Unit Size	Height (mm)	Width (mm)	Face Velocity (m/s)
47,000	Size 15	2,110	3,230	2.27
	1,920x2,720	2,110	2,950	2.5

- > 1 cm increment for width & height dimensions
- > No additional design cost and lead time for customized unit

## Plug & Play control system:

The Daikin Digital Control Platform, with its 310 digital inputs and outputs, stands out of the crowd for the great flexibility, providing infinite possibilities and exactly match any customer need. Other than that, Digital Control solution makes wiring easier and quicker than a traditional solution, thanks to a platform that simplifies the communication between the different sections and devices. Having less cables

across the unit, then, helps unit's cleaning operations and reduces installation costs, making the Daikin AHU Professional Series even more competitive.

*All units with factory integrated control are delivered pre-programmed, tested and ready for installation.*



### Main features

- › Free cooling/free heating management
  - › VRV direct expansion systems management
  - › Eco and reduced night modes
  - › Up to 310 I/O (inputs/outputs)
  - › All components internally wired
  - › Fast connection between sections
  - › Programming schedule
  - › Indoor Air Quality (IAQ) controlled by CO<sub>2</sub> Probe
  - › Regulation logic Temperature Supply, Return, Ambient
  - › Preloaded control parameters simplify the field commissioning
  - › Unit delivered tested and programmed in the factory ensuring high quality level
  - › Integrated control ensures easy assembly on site with reduction of installation cost and time
  - › Minimum maintenance required
  - › Low voltage and high voltage in a unique solution excludes the involvement of a second company with a cost saving and no additional warranty from a third party
- › User friendly control interface
  - › Supervision and Control management local, remote options (Modbus, Bacnet)
  - › Maximum flexibility in selecting the product and control feature directly from selection software





### Options - D-AHU Professional

Construction type		S2	F2
Profile	Anodized aluminium	standard	standard
	Anodized aluminium with thermal break	option	option
Corner	Glass fibre reinforced nylon	standard	standard
Panel insulation	Polyurethane foam density 40 kg/m <sup>3</sup> thermal conductivity 0.022 W/m*K fire reaction class b-s2, diam. as per EN13501-1	standard	standard
	Mineral wool density 120 kg/m <sup>3</sup> thermal conductivity 0.036 W/m*K (referred to 20 °C) fire reaction class A1 as per EN13501-1	option	option
External sheet material	Pre-coated galvanized steel	standard	standard
	Aluzinc	option	option
	Aluminium	option	option
	Stainless Steel 430	option	option
	Stainless Steel 316	option	option
Internal sheet material	Pre-coated galvanized steel	option	option
	Aluzinc	standard	standard
	Aluminium	option	option
	Stainless Steel 430	option	option
	Stainless Steel 316	option	option
Base frame	Aluminium	standard (up to 30,000 m <sup>3</sup> /h)	standard (up to 30,000 m <sup>3</sup> /h)
	Galvanized steel	standard (above 30,000 m <sup>3</sup> /h)	standard (above 30,000 m <sup>3</sup> /h)
	Stainless Steel 430	option	option
	Stainless Steel 316L	option	option
Handle	Glass fibre reinforced nylon	standard	standard
	Compression type	standard	standard
Type	Hinge function type (possibility to remove door)	option	option

## Daikin on Site

The Daikin On Site platform offers different features and functions to monitor and control the unit.

The monitoring system makes available dashboards, remote access, scheduling, online graphics, diagnostics, software upgrade.

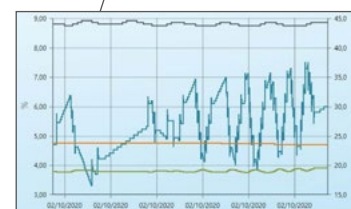

# Daikin fresh air package



## Plug and play connection of AHU to Daikin VRV and ERQ


The Daikin fresh air package provides a complete solution, including all unit controls (expansion valve, control box and AHU controller) and sensors factory mounted and configured.

### Higher efficiency

Daikin heat pumps are renowned for their high energy efficiency. Integrating the AHU with a heat recovery system is even more effective since an office system can frequently be in cooling mode while the outdoor air is too cold to be brought inside in an unconditioned state. In this case heat from the offices is merely transferred to heat up the cold incoming fresh air.

### High comfort levels

Daikin ERQ and VRV units respond rapidly to fluctuations in supply air temperature, resulting in a steady indoor temperature and resulting in high comfort levels for the end user. The ultimate is the VRV range which improves comfort even more by offering continuous heating, also during defrost.

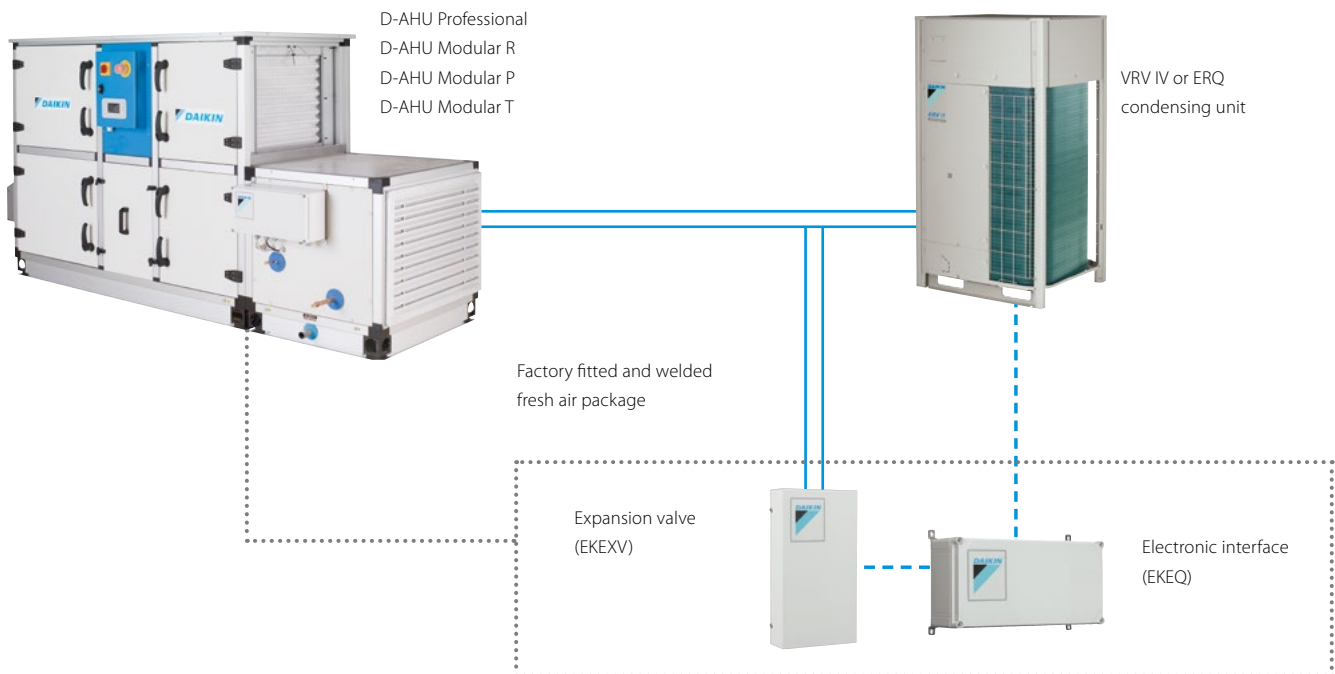





Fan Coil Units are a highly efficient means of turning a water chiller, heat pump or hot water boiler into an efficient, quiet air conditioning system. These units are an effective solution to provide a comfortable environment for both commercial and residential applications. Daikin offers a wide range of Fan Coil Units for both concealed and exposed applications. Three models are available in flexible application. The only moving part in the units is the fan, making them ideal for use in offices, hotels and at home. The goal is to obtain the right solution, both technically and aesthetically.

# Table of content

# Fan coil units

[Why choose Daikin fan coil units?](#) 148

[Products overview](#) 150

Round flow cassette

FWC-BT/BF 152

4-way blow ceiling mounted cassette

FWF-BT/BF 153

Ceiling mounted Open protocol cassette

**NEW** FWI-A 154

**NEW** FWH-A 155

Floor standing units

FWZ-AT/AF 156

FWV-DAT/DAF 157

Flexi type units

FWR-AT/AF 158

FWL-DAT/DAF 159

FWS-AT/AF 160

FWM-DAT/DAF 161

FWE-DT/DF 162

Ducted units

FWE-CT/CF low ESP 163

FWP-CT/CF medium ESP 164

FWB-CT/CF medium ESP 165

FWN-AT/AF high ESP 166

FWD-AT/AF high ESP 167

Wall mounted unit

FWT-GT 168

[Options & accessories](#) 170



## Fan coil units with BLDC motor

As more buildings undergo renovation, the need to be able to deliver high indoor air quality in a specific space in an **efficient and cost-effective way** without having to do a radical re-fit of the entire HVAC system has made fan coil technology an obvious solution.

Daikin has a full capacity range of **aesthetically pleasing** fan coil units with advanced controls that reliably deliver **excellent comfort levels**. And by using a refined range of advanced DC fan motors, we are able to offer flexibility while maintaining very low noise levels.

## Why choose Daikin fan coil units?

- The new brushless DC ranges reflect Daikin's commitment to developing highly efficient fan coil units that help to reduce energy consumption, without compromising on reliability and performance.
- High level quality is written large for us and we are pleased to offer high technology solutions to the market.

## Benefits for the installer

- › Reduced amount of sizes: less stock space needed
- › Modular designs for multiple configurations
- › Easy integration in BMS system via modbus protocol


## Benefits for the consultant

- › Best solution in the market in order to have top efficiency, best comfort and lowest sound levels
- › Product flexibility: wide range of options, accessories and controls

## Benefits for the end user

- › High comfort level
- › Up to 70% savings on running costs with a BLDC fan motor
- › Controller with timer programmed operating mode
- › FWECSA controller that can satisfy all customer requirements in terms of FCU management

## New generation web-based fan coil selection software

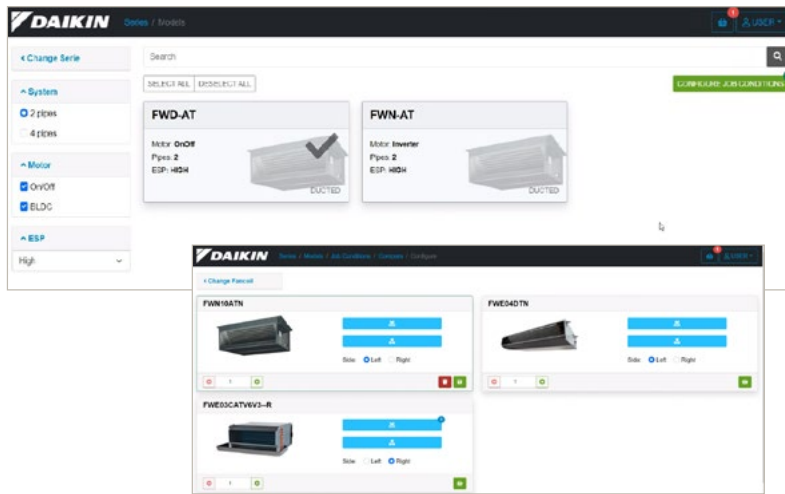

Select your FCU via our new web-based selection software:

- › Selection logic is based on the performance conditions requested and filtered by the user
- › The unit is completely configurable by the user with all the options/accessories available
- › A modular report with certified technical specifications and project summary can be printed

## BIM objects

Our Fan Coils units are available as BIM objects in Revit format, which means they can be used in Autodesk REVIT MEP and in AutoCAD 2D files.

Visit our [BIM Application Suite](#)

## BLDC fan motors Video

Learn more on the advantages of BLDC fan motors in Fan coil units:

- Higher efficiency than AC motor**
- High comfort level**
- Low sound levels**
- High flexibility level**



Check on  
**YouTube**

[www.youtube.com/DaikinEurope](http://www.youtube.com/DaikinEurope)



## Touch display FCU controller: FWTOUCH

- › Available in three different chromatic version in combination with FWECSAP PCB
- › Full capacitive 2.8" touchscreen with a more intuitive layout
- › Advanced functionalities in a new look with a color display
- › The control allows the networking via Modbus protocol



WHITE



BLACK



GREY

# Products overview

Type	Model	Product name	Fan motor type	Capacity
Round flow cassette	<b>Round flow cassette</b> - 900 x 900 cassette - 360° air discharge ensures uniform air flow - Integrated fresh air intake - Easy installation in corners - Standard drain pump with 850 mm lift	 FWC-BT/BF	 BLDC	Cooling: 4.0 - 8.7 kW Heating: 4.8 - 10.6 kW
	<b>4-way blow ceiling mounted cassette</b> - 600 x 600 cassette - Integrated fresh air intake - Horizontal auto swing - Easy installation in corners - Standard drain pump with 750 mm lift	FWF-BT/BF	 AC	Cooling: 1.4 - 4.9 kW Heating: 2.3 - 5.6 kW
Ceiling mounted Open protocol cassette	<b>FWI-A</b> - 600 x 600 and 900 x 900 cassette - BLDC motor with low energy consumption up to 75% - 4-way air discharge - Open protocol for control - Condensate drainage pump up to 900 mm lift	FWI-A	 BLDC	Cooling: 1.33 - 10.5 kW Heating: 1.49 - 12.2 kW
	<b>FWH-A</b> - 600 x 600 and 900 x 900 cassette - ON/OFF 3-speed motor - 4-way air discharge - Open protocol for control - Condensate drainage pump up to 900 mm lift	FWH-A	 AC	Cooling: 1.70 - 9.73 kW Heating: 1.97 - 11.1 kW
Floor standing units	<b>Floor standing unit</b> - For vertical mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels	FWZ-AT/AF	 BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	<b>Floor standing unit</b> - For horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance	FWV-DAT/DAF	 AC	Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW
Flexi type units	<b>Flexi type unit</b> - For horizontal or vertical mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels	FWR-AT/AF	 BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	<b>Flexi type unit</b> - For horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance	FWL-DAT/DAF	 AC	Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW
	<b>Concealed flexi type unit</b> - For horizontal or vertical concealed mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels	FWS-AT/AF	 BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	<b>Concealed flexi type unit</b> - For horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance	FWM-DAT/DAF	 AC	Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW
Ducted units	<b>Concealed flexi type</b> - For horizontal or vertical concealed mounting - Available static pressure up to 30 Pa - Easy installation and maintenance - 5/6 speed fan motor - High power air flow	FWE-DT/DF	 AC	Cooling: 1.2 - 5.6 kW Heating: 1.3 - 6.3 kW
	<b>Ducted unit with low ESP</b> - For horizontal concealed mounting - Available static pressure up to 30 Pa - Easy installation and maintenance - 4-speed fan motor - High power air flow	FWE-CT/CF	 AC	Cooling: 2.10 - 9.96 kW Heating: 2.7 - 11.5 kW
	<b>Ducted unit with medium ESP</b> - For horizontal concealed mounting - Instant adjustment to temperature and relative humidity changes - Available static pressure up to 70 Pa - Low sound levels	FWP-CT/CF	 BLDC	Cooling: 1.97 - 8.28 kW Heating: 1.99 - 8.46 kW
	<b>Ducted unit with medium ESP</b> - For horizontal concealed mounting - Available static pressure up to 60 Pa - 7-speed electrical motors (thermal protection on windings) - Easy maintenance	FWB-CT/CF	 AC	Cooling: 1.90 - 8.12 kW Heating: 1.99 - 8.46 kW
Ducted units	<b>Ducted unit with high ESP</b> - For horizontal or vertical concealed mounting - Available static pressure up to 70 Pa - Easy maintenance	FWN-AT/AF	 BLDC	Cooling: 2.83 - 8.75 kW Heating: 3.63 - 18.10 kW
	<b>Ducted unit with high ESP</b> - For horizontal or vertical concealed mounting - Available static pressure from 60 up to 145 Pa - Easy maintenance	FWD-AT/AF	 AC	Cooling: 3.90 - 18.30 kW Heating: 4.05 - 21.92 kW
Wall mounted unit	<b>Wall mounted unit</b> - High aesthetic cabinet design - Optimum air distribution - Easy installation - 3-speed fan motor	FWT-GT	 AC	Cooling: 2.43 - 5.28 kW Heating: 3.22 - 7.33 kW




	1	15	2	25	3	35	4	5	6	7	8	9	10	11	12	15	16	17	18
									•	•	•	•							
			•		•		•	•											
			•		•		•		•	•	•								
			•		•		•		•	•	•								
			•		•				•		•								
	•	•	•	•	•	•	•		•		•		•						
			•		•				•		•								
	•	•	•	•	•	•	•		•		•		•						
			•		•				•		•								
	•	•	•	•	•	•	•		•		•		•						
			•		•		•	•	•	•	•		•	•					
			•		•		•		•	•	•		•						
							•	•	•		•		•	•		•		•	
							•	•	•	•	•		•	•		•		•	
							•	•	•	•	•		•						
							•		•		•		•		•		•		•
			•		•		•	•	•										




# Round flow cassette

BLDC fan motor unit for ceiling mounting.  
360° air discharge

- › 360° air discharge ensures uniform air flow and temperature distribution
- › Modern style decoration panel in white (RAL9010)
- › Optional fresh air intake
- › Comfortable horizontal air discharge ensures draughtfree operation and prevents ceiling soiling



- › Possibility to shut 1 or 2 flaps for easy installation in corners
- › Standard drain pump with 850mm lift increases flexibility and installation speed

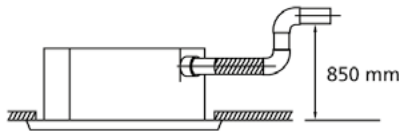

More details and final information can be found by scanning or clicking the QR codes.



FWC-BT



FWC-BF


Indoor unit			FWC-BT/BF	06	07	08	09	06	07	08	09
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	5.5	6.1	7.2	8.1	5.9	6.3	7.2	8.3
		Medium	kW	4.7	5.3	5.9	6.8	5.1	5.6	6.2	6.9
		Low	kW	3.9	4.5	4.8	5.4	4.3	4.6	4.8	5.7
	Sensible capacity	High	kW	4.2	4.7	5.7	6.5	4.2	4.6	5.4	6.4
Medium		kW	3.5	4.0	4.5	5.3	3.6	4.0	4.5	5.2	
Low		kW	2.8	3.3	3.5	4.1	3.1	3.3	3.5	4.0	
Heating capacity (standard conditions)	High	kW	6.8	7.7	9.2	10.6	6.9	7.8	9.2	10.4	
	Medium	kW	5.8	6.6	7.6	8.8	6.1	6.7	7.6	8.7	
	Low	kW	4.8	5.5	5.8	7.0	5.2	5.5	5.8	6.8	
Power input	High	kW	0.045	0.054	0.077	0.107	0.046	0.055	0.077	0.107	
	Medium	kW	0.040	0.046	0.058	0.076	0.041	0.047	0.059	0.077	
	Low	kW	0.034	0.037	0.039	0.045	0.035	0.038	0.040	0.046	
FCEER			116	119	113	104	124	120	112	106	
FCCOP			143	147	141	137	149	144	138	131	
Dimensions	Unit	HeightxWidthxLength	mm	288x840x840							
Weight	Unit		kg	26				29			
Fan	Type			Turbo fan							
	Quantity			1							
	Air flow rate	High	m <sup>3</sup> /h	1,068	1,236	1,518	1,776	1,032	1,200	1,476	1,746
		Medium	m <sup>3</sup> /h	894	1,038	1,200	1,410	864	1,002	1,164	1,374
Low		m <sup>3</sup> /h	720	834	888	1,044	708	804	852	1,014	
Total sound power level	High	dBA	43.0	47.0	53.0	57.0	43.0	47.0	53.0	57.0	
	Medium	dBA	36.0	39.0	44.0	49.0	36.0	39.0	44.0	49.0	
	Low	dBA	31.0	33.0	36.0	40.0	33.0	36.0	39.0	40.0	
Sound pressure level	High	dBA	29.0	33.0	39.0	43.0	29.0	33.0	39.0	43.0	
	Medium	dBA	24.0	28.0	32.0	37.0	24.0	28.0	32.0	37.0	
	Low	dBA	21.0	22.0	24.0	28.0	21.0	22.0	24.0	28.0	
Piping connections	Drain	OD	mm	VP25 (External dia.32 / internal dia. 25)							
Power supply		Phase/Frequency/Voltage	Hz/V	1~/50/220-240							
Control systems	Infrared remote control			BRC7E532F / BRC7E533F							
	Wired remote control			BRC315D7							

For standard conditions refer to Measuring Conditions table, at the end of this catalogue

# 4-way blow ceiling mounted cassette

AC fan motor unit for ceiling mounting.  
Possibility to shut 1 or 2 flaps

- › Modern style decoration panel in white (RAL9010)
- › Compact casing (570mm in width and Length) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- › Comfortable horizontal auto swing ensures draughtfree operation and prevents ceiling soiling
- › Optional fresh air intake
- › Possibility to shut 1 or 2 flaps for easy installation in corners
- › Standard drain pump with 750mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.



FWF-BT



FWF-BF

Indoor unit			FWF-BT/BF	02	03	04	05	02	03	04	05
			2-pipe				4-pipe				
Cooling capacity (standard conditions)	Total capacity	High	kW	1.7	3.0	4.0	4.9	1.8	2.9	3.8	4.6
		Medium	kW	1.5	2.7	3.1	4.0	1.5	2.4	3.1	3.8
		Low	kW	1.3	2.4	2.8	1.3	1.6	2.6		
	Sensible capacity	High	kW	1.4	2.0	2.7	3.5	1.5	1.8	2.5	3.2
Medium		kW	1.2	1.7	2.0	2.7	1.2	1.5	1.9	2.5	
Low		kW	1.0	1.4	1.8	1.0	1.6				
Heating capacity (standard conditions)	High	kW	2.4	3.3	4.5	5.6	3.3	3.6	4.7	5.7	
	Medium	kW	2.1	2.9	3.5	4.4	2.9	3.1	3.7	4.7	
	Low	kW	1.9	2.7	3.0	2.4	2.6	3.2			
Power input	High	kW	0.074	0.090	0.118	0.074	0.094	0.121			
	Medium	kW	0.067	0.070	0.089	0.067	0.062	0.074	0.093		
	Low	kW	0.060	0.055	0.062	0.060	0.055	0.066			
FCEER			22	40	44	45	22	33	34	40	
FCCOP			32	45	49	41	48	49			
Dimensions	Unit	HeightxWidthxLength	mm	285 x575x575							
Weight	Unit		kg	19				20			
Fan	Type			Turbo fan							
	Quantity			1							
	Air flow rate	High	m <sup>3</sup> /h	456	468	660	876	468	438	618	822
		Medium	m <sup>3</sup> /h	384	390	486	648	390	366	456	612
Low		m <sup>3</sup> /h	300	318	420	318	300	390			
Total sound power level	High	dBA	44.0	50.0	55.0	44.0	46.0	52.0	57.0		
	Medium	dBA	40.0	44.0	49.0	40.0	42.0	46.0	51.0		
	Low	dBA	36.0	38.0	42.0	36.0	38.0	41.0	44.0		
Sound pressure level	High	dBA	31.0	40.0	45.0	31.0	33.0	42.0	47.0		
	Medium	dBA	27.0	33.0	39.0	27.0	29.0	35.0	41.0		
	Low	dBA	26.0	30.0	26.0	27.0	32.0				
Piping connections	Drain	OD		VP20 (External dia.26 / Internal dia. 20)							
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/220-440							
Control systems	Infrared remote control			BRC7E530 / BRC7E531							
	Wired remote control			BRC315D7							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Ceiling mounted BLDC "naked" cassette

BLDC fan motor for a precise control of operation  
4-way air discharge

- › Two dimensional frames (600x600mm and 900x900mm)
- › Modern style ABS air intake diffusion grille
- › Low operating sound level
- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Condensate drainage pump up to 900mm lift
- › Available with mounted control board or in naked version to be combinable with any controller
- › Reduced installation and commissioning time with the availability of 2-way or 3-way valves, with ON-OFF or modulating actuator, and also pressure-independent control valves



Indoor unit				FWI-AT/FWI-AF		02	03	04	06	07	08	02	04	06	08
				2-pipe								4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	2,63	4,39	5,23	6,39	9,04	10,5	2,6	3,61	6,61	9,5		
		Medium	kW	2,24	3,4	3,95	5,36	7,26	8,37	2,18	2,8	5,34	7,62		
		Low	kW	1,93	2,68	2,76	4,8	5,92	6,7	1,85	2,05	4,61	6,09		
	Sensible capacity	High	kW	2,2	3,41	4,11	4,75	6,78	7,97	2,23	3,31	5,03	7,56		
		Medium	kW	1,81	2,54	2,96	3,92	5,31	6,15	1,79	2,38	3,94	5,82		
	Low	kW	1,51	1,94	1,98	3,8	4,24	4,8	1,46	1,62	3,34	4,5			
Heating capacity (standard conditions)	High	kW	3,25	4,58	5,55	7,30	10,20	12,20	3,86	4,98	9,53	12,90			
	Medium	kW	2,70	3,48	4,09	6,00	7,99	9,35	3,34	4,06	7,96	10,80			
	Low	kW	2,27	2,69	2,77	5,50	6,33	7,23	2,90	3,14	7,01	8,96			
Power input	High	kW	0,018	0,037	0,067	0,036	0,067	0,15	0,018	0,067	0,036	0,15			
	Medium	kW	0,01	0,015	0,022	0,018	0,036	0,06	0,01	0,022	0,018	0,06			
	Low	kW	0,007	0,009	0,009	0,013	0,018	0,025	0,007	0,009	0,014	0,025			
Dimensions	Unit	Height	mm	298				350				298			
		Width	mm	577				793				577			
		Depth	mm	577				793				577			
Weight	Unit	kg	23				43				23				
Casing	Material		Galvanised steel												
Decoration panel	Dimensions	Height	mm	41				75				41			
		Width	mm	730				860				730			
		Depth	mm	730				860				730			
		Weight	kg	2,5				5				2,5			
Air Filter	Type		Honeycomb polypropylene												
Fan	Type		Backward Centrifugal												
	Quantity		1												
	Air flow rate	High	m <sup>3</sup> /h	583	796	980	1276	1554	1831	610	982	1137	1823		
Medium		m <sup>3</sup> /h	454	551	650	978	1143	1321	460	643	841	1314			
Low		m <sup>3</sup> /h	397	397	397	843	864	976	356	395	687	956			
Total sound power level	High	dBA	46	54	61	45	53	58	46	61	45	58			
	Medium	dBA	40	44	49	39	45	50	40	49	39	50			
	Low	dBA	35	37	38	35	39	43	35	38	35	43			
Sound pressure level	High	dBA	38	46	61	37	45	50	46	61	45	58			
	Medium	dBA	33	36	49	31	37	42	40	49	39	50			
	Low	dBA	27	29	38	27	31	35	38	35	43				
Water flow	Cooling	High	l/h	452	754	898	1097	1545	1805	447	620	1135	1631		
		Medium	l/h	385	584	687	921	1245	1436	374	480	917	1307		
		Low	l/h	331	460	473	833	1015	1150	317	352	792	1045		
	Heating	High	l/h	565	797	965	1269	1779	2116	338	435	834	1133		
		Medium	l/h	470	605	711	1043	1390	1625	292	356	697	947		
		Low	l/h	395	468	481	953	1100	1257	254	275	613	785		
Allowed water temperature	Cooling	Min	°C	5											
	Heating	Max	°C	70											
Piping connections	Water	Inlet		1/2"				3/4"				1/2"			
		Outlet		1/2"				3/4"				1/2"			
	Drain	OD	mm	10											
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230												
Maximum absorbed current		A	0,64				1,20				0,64				
Control systems	Wired remote control		FWEC3A / FWECSA / FWTOUCH												

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Ceiling mounted AC "naked" cassette

AC fan motor unit for ceiling mounting  
4-way air discharge

- › Two dimensional frames (600x600mm and 900x900mm)
- › Modern style ABS air intake diffusion grille
- › Reliability and sturdiness in a compact design
- › Condensate drainage pump up to 900mm lift
- › Available with mounted control board or in naked version to be combinable with any controller
- › Reduced installation and commissioning time with the availability of 2-way or 3-way valves with ON-OFF or modulating actuator



Indoor unit				FWH-AT/FWH-AF		02	03	04	06	07	08	02	03	04	06	08			
				2-pipe												4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	2,53	4,31	5	7,01	8,24	9,73	2,35	3,38	3,62	7,45	9					
		Medium	kW	1,97	3,55	4,61	5,36	6,11	8,61	1,85	2,83	3,38	6,6	8,48					
		Low	kW	1,7	2,39	3,4	4,64	5,16	6,34	1,56	2,01	2,58	4,73	5,83					
	Sensible capacity	High	kW	2,14	3,18	3,79	5,29	6,1	7,35	1,94	3,38	3,02	5,81	6,98					
		Medium	kW	1,6	2,53	3,44	3,99	4,37	6,4	1,49	2,22	2,77	5,04	6,56					
		Low	kW	1,33	1,66	2,43	3,42	3,68	4,59	1,24	1,49	2	3,47	4,29					
Heating capacity (standard conditions)	High	kW	3,1	4,3	5,35	8,17	9,18	11,1	3,55	4,22	4,81	10,6	12,4						
	Medium	kW	2,33	3,44	4,92	6,06	6,53	9,53	2,88	3,62	4,54	9,6	11,7						
	Low	kW	1,97	2,29	3,49	5,16	5,22	6,71	2,53	2,75	3,67	7,20	8,64						
Power input	High	kW	0,04	0,05	0,09	0,11	0,15	0,15	0,04	0,05	0,09	0,11	0,15						
	Medium	kW	0,02	0,04	0,07	0,06	0,11	0,02	0,04	0,07	0,06	0,05	0,11						
	Low	kW	0,02	0,03	0,06	0,05	0,06	0,02	0,03	0,06	0,05	0,06	0,05	0,06					
Dimensions	Unit	Height	mm	298				350				298				350			
		Width	mm	577				793				577				793			
		Depth	mm	577				793				577				793			
Weight	Unit	kg	23				43				23				43				
Casing	Material		Galvanised steel																
Decoration panel	Dimensions	Height	mm	41				75				41				75			
		Width	mm	730				860				730				860			
		Depth	mm	730				860				730				860			
		Weight	kg	2,5				5				2,5				5			
Air Filter	Type		Honeycomb polypropylene																
Fan	Type		Backward Centrifugal																
	Quantity		1																
	Air flow rate	High	m <sup>3</sup> /h	557	640	805	1494	1380	1651	533	640	805	1380	1544					
Medium		m <sup>3</sup> /h	379	487	717	997	902	1380	366	487	717	1147	1544						
Low		m <sup>3</sup> /h	297	306	479	801	718	902	289	306	479	718	902						
Total sound power level	High	dB(A)	45	50	58	51	56	45	50	58	51	56							
	Medium	dB(A)	37	44	55	40	51	37	44	55	40	51							
	Low	dB(A)	33	40	47	35	40	33	40	47	35	40							
Sound pressure level	High	dB(A)	37	42	50	43	48	37	42	50	43	48							
	Medium	dB(A)	29	36	47	32	43	29	36	47	32	43							
	Low	dB(A)	25	32	39	27	32	25	32	39	27	32							
Water flow	Cooling	High	l/h	441	749	873	1223	1434	1696	410	589	637	1299	1571					
		Medium	l/h	342	616	803	930	1060	1498	321	493	593	1148	1477					
		Low	l/h	295	416	593	805	893	1097	271	351	453	822	1010					
	Heating	High	l/h	539	747	930	1420	1596	1930	311	369	421	929	1083					
		Medium	l/h	404	597	855	1053	1136	1656	258	317	398	840	1026					
		Low	l/h	342	399	607	897	908	1167	222	241	322	634	757					
Allowed water temperature	Cooling	Min	°C	5															
	Heating	Max	°C	70															
Piping connections	Water	Inlet		1/2"				3/4"				1/2"				3/4"			
		Outlet		1/2"				3/4"				1/2"				3/4"			
	Drain	OD	mm	10															
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																
Maximum absorbed current		A	0,2	0,4	0,7	0,2	0,4	0,7											
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWTOUCH																

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Floor standing unit

BLDC fan motor unit for vertical mounting. Continuous air flow regulation and fan speed modulation

- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Requires very little installation space



More details and final information can be found by scanning or clicking the QR codes.



FWZ-AT



FWZ-AF

Indoor unit			FWZ-AT/AF	02	03	06	08	02	03	06	08
			2-pipe				4-pipe				
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.2	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.1	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
	Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01	
Heating capacity (standard conditions)	High	kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35	
	Medium	kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29	
	Low	kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85	
Power input	High	kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087	
	Medium	kW	0.01		0.02	0.038	0.01		0.02	0.038	
	Low	kW	0.01			0.013	0.01			0.013	
FCEER			B	A				B	A		B
FCCOP			B	A				B	A		B
Dimensions	Unit	HeightxWidthxLength	mm	564x774x226	564x984x226	564x1,190x226	564x1,404x251	564x774x226	564x984x226	564x1,190x226	564x1,404x251
Weight	Unit		kg	20.6	26.7	32.3	41.6	20.6	26.7	32.3	41.6
Casing	Colour			White - RAL9010							
Air filter	Type			Polypropylene net							
Fan	Type			Centrifugal							
	Quantity			1	2			1	2		
	Air flow rate	High	m <sup>3</sup> /h	344	442	785	1,393	327	431	763	1,362
		Medium	m <sup>3</sup> /h	271	341	605	1,022	261	332	593	1,007
Low		m <sup>3</sup> /h	211	241	470	642	205	237	460	636	
Total sound power level	High	dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0	
	Medium	dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0	
	Low	dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0		
Sound pressure level	High	dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0	
	Medium	dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0	
	Low	dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0		
Electric heater	Power input (Optional)	kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-	
Piping connections	Drain OD	mm	16								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230								
Control systems	Wired remote control		FWEC3A / FWEC3A / FWTOUCH								

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Floor standing unit

## AC fan motor unit for vertical mounting

- › Quick fixing system for wall mounted installation
- › Pre-assembled 3-way/4-port on/off valves are available
- › Valve packages are insulated, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › The air filter can easily be removed for cleaning
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats



More details and final information can be found by scanning or clicking the QR codes.



FWV-DAT



FWV-DAF

Indoor unit			FWV-DAT/DAF																								
			01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10					
			2-pipe										4-pipe														
Cooling capacity (standard conditions)	Total capacity	High	kW	1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64				
		Medium	kW	1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99				
		Low	kW	1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96				
	Sensible capacity	High	kW	1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61				
		Medium	kW	0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40				
		Low	kW	0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91				
Heating capacity (standard conditions)	High	kW	1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76	2.53	2.68	4.20	3.82	4.64	6.97	7.35						
	Medium	kW	1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56	2.18	2.31	3.47	3.22	4.07	6.02	6.29						
	Low	kW	1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36	1.78	1.88	2.82	2.73	3.55	5.02	4.85						
Power input	High	kW	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244									
	Medium	kW	0.03	0.04	0.05	0.06	0.07	0.13	0.17	0.03	0.04	0.05	0.06	0.07	0.13	0.17	0.03	0.04	0.05	0.06	0.07	0.13	0.17				
	Low	kW	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11									
Dimensions	Unit	HeightxWidthxLength	mm	564x774x226			564x984x226			564x1,190x226			564x1,400x251			564x774x226			564x984x226			564x1,190x226			564x1,400x251		
Weight	Unit		kg	19.7	20.6	25.5	26.7	31.0	30.4	32.3	41.4	41.6	19.7	20.6	25.5	26.7	31.0	30.4	32.3	41.4	41.6						
Casing	Colour		White - RAL9010																								
Air filter	Type		Polypropylene net																								
Fan	Type		Centrifugal																								
	Quantity		1				2				1				2												
Air flow rate	High	m³/h	319	344	442	640	706	785	1,011	1,383	307	330	327	432	431	628	690	763	998	1,362							
		Medium	m³/h	233	271	341	450	497	605	771	1,022	225	261	334	332	444	490	593	765	1,007							
		Low	m³/h	178	211	241	320	361	470	570	642	174	205	238	237	316	356	460	565	636							
Total sound power level	High	dBA	47.0	49.0	50.0	48.0	52.0	53.0	56.0	61.0	67.0	45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0						
	Medium	dBA	42.0	44.0	43.0	42.0	43.0	49.0	54.0	60.0	39.0	44.0	43.0	41.0	45.0	46.0	53.0	54.0	58.0								
	Low	dBA	37.0	38.0	40.0	35.0	36.0	35.0	43.0	47.0	49.0	33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0						
Sound pressure level	High	dBA	42.0	44.0	45.0	43.0	47.0	48.0	51.0	56.0	62.0	40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0						
	Medium	dBA	37.0	39.0	38.0	37.0	38.0	44.0	49.0	55.0	34.0	39.0	38.0	36.0	38.0	41.0	48.0	49.0	53.0								
	Low	dBA	32.0	33.0	35.0	30.0	31.0	30.0	38.0	42.0	44.0	28.0	33.0	29.0	28.0	29.0	32.0	43.0	41.0	43.0							
Electric heater	Power input (Optional)	kW	1.0	1.5	1.6	2.0	3.0	1.0	1.5	1.6	2.0	3.0															
Piping connections	Drain OD	mm	16																								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																								
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / ECFWMB6 / FWTOUCH																								

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Flexi type unit

BLDC fan motor unit for horizontal or vertical mounting.  
Continuous air flow regulation and fan speed modulation

- › For wall or ceiling mounted installation: ideal solution for spaces with no false ceilings
- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Requires very little installation space



More details and final information can be found by scanning or clicking the QR codes.



FWR-AT



FWR-AF

Indoor unit			FWR-AT/AF	2-pipe				4-pipe			
				02	03	06	08	02	03	06	08
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.20	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.10	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
	Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01	
Heating capacity (standard conditions)	High	kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35	
	Medium	kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29	
	Low	kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85	
Power input	High	kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087	
	Medium	kW	0.01		0.02	0.038	0.01		0.02	0.038	
	Low	kW	0.01			0.013	0.01			0.013	
FCEER			B	A			B	A			
FCCOP			B	A			B	A			
Dimensions	Unit	HeightxWidthxLength	mm	564x774x246	564x984x246	564x1,190x246	564x1,404x271	564x774x246	564x984x246	564x1,190x246	564x1,404x271
Weight	Unit		kg	21.2	27.5	33.6	43.1	21.2	27.5	33.6	43.1
Casing	Colour			White - RAL9010							
Air filter	Type			Polypropylene net							
Fan	Type			Centrifugal							
	Quantity			1	2			1	2		
	Air flow rate	High	m <sup>3</sup> /h	344	442	785	1,393	327	431	763	1,362
		Medium	m <sup>3</sup> /h	271	341	605	1,022	261	332	593	1,007
Low		m <sup>3</sup> /h	211	241	470	642	205	237	460	636	
Total sound power level	High	dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0	
	Medium	dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0	
	Low	dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0		
Sound pressure level	High	dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0	
	Medium	dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0	
	Low	dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0		
Electric heater	Power input (Optional)	kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-	
Piping connections	Drain OD	mm	16								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230								
Control systems	Wired remote control		FWEC3A / FWEC3A / FWTOUCH								

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue



# Flexi type unit

## AC fan motor unit for horizontal or vertical mounting

- › Quick fixing system for wall or ceiling mounted installation
- › Pre-assembled 3-way/4-port on/off valves are available
- › Valve packages are insulated, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › The air filter can easily be removed for cleaning
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats



More details and final information can be found by scanning or clicking the QR codes.



FWL-DAT



FWL-DAF

Indoor unit			FWL-DAT/DAF										FWL-DAF										
			01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10	
			2-pipe										4-pipe										
Cooling capacity (standard conditions)	Total capacity	High	kW																				
		Medium	kW																				
	Sensible capacity	High	kW																				
		Medium	kW																				
Heating capacity (standard conditions)	High	Medium	kW																				
		Low	kW																				
	Medium	High	kW																				
		Low	kW																				
Power input	High	kW																					
	Medium	kW																					
	Low	kW																					
Dimensions	Unit	HeightxWidthxLength	mm										mm										
Weight	Unit		kg										kg										
Casing	Colour		White - RAL9010																				
Air filter	Type		Polypropylene net																				
Fan	Type		Centrifugal																				
	Quantity		1										2										
	Air flow rate	High	m <sup>3</sup> /h	319 344 442 640 706 785 1,011 1,393 307 330 327 432 431 628 690 763 998 1,362										233 271 341 450 497 605 771 1,022 225 261 334 332 444 490 593 765 1,007									
		Medium	m <sup>3</sup> /h	178 211 241 320 361 470 570 642 174 205 238 237 316 356 460 565 636										42.0 44.0 43.0 42.0 43.0 49.0 54.0 60.0 39.0 44.0 43.0 41.0 45.0 46.0 53.0 54.0 58.0									
Low		m <sup>3</sup> /h	37.0 38.0 40.0 35.0 36.0 35.0 43.0 47.0 48.0 51.0 56.0 62.0 40.0 44.0 45.0 34.0 33.0 36.0 39.0 48.0 46.0 48.0										42.0 44.0 45.0 43.0 47.0 48.0 51.0 56.0 62.0 40.0 44.0 45.0 34.0 33.0 36.0 39.0 48.0 46.0 48.0										
Total sound power level	High	dBA	47.0 49.0 50.0 48.0 52.0 53.0 56.0 61.0 67.0 45.0 49.0 50.0 48.0 47.0 53.0 56.0 58.0 60.0 66.0																				
	Medium	dBA	42.0 44.0 43.0 42.0 43.0 49.0 54.0 60.0 39.0 44.0 43.0 41.0 45.0 46.0 53.0 54.0 58.0																				
	Low	dBA	37.0 38.0 40.0 35.0 36.0 35.0 43.0 47.0 48.0 51.0 56.0 62.0 40.0 44.0 45.0 34.0 33.0 36.0 39.0 48.0 46.0 48.0																				
Sound pressure level	High	dBA	42.0 44.0 45.0 43.0 47.0 48.0 51.0 56.0 62.0 40.0 44.0 45.0 34.0 33.0 36.0 39.0 48.0 46.0 48.0																				
	Medium	dBA	37.0 39.0 38.0 37.0 38.0 44.0 49.0 55.0 34.0 39.0 38.0 36.0 38.0 41.0 48.0 49.0 53.0																				
	Low	dBA	32.0 33.0 35.0 30.0 31.0 30.0 38.0 42.0 44.0 28.0 33.0 29.0 28.0 29.0 32.0 43.0 41.0 43.0																				
Electric heater	Power input (Optional)	kW	1.0 1.5 1.6 2.0 3.0 1.0 1.5 1.6 2.0 3.0																				
Piping connections	Drain OD	mm	16																				
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																				
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / ECFWMB6 / FWTOUCH																				

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Concealed flexi type unit

BLDC fan motor unit for horizontal or vertical concealed mounting. Continuous air flow regulation and fan speed modulation

- › Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Available static pressure up to 50Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWS-AT



FWS-AF

Indoor unit			FWS-AT/AF	02	03	06	08	02	03	06	08
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.2	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.1	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
		Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01
Heating capacity (standard conditions)	High	kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35	
	Medium	kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29	
	Low	kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85	
Power input	High	kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087	
	Medium	kW	0.01		0.02	0.038	0.01		0.02	0.038	
	Low	kW	0.01		0.013		0.01		0.013		
FCEER				B	A			B	A		
FCCOP				B	A			B	A		
Dimensions	Unit	HeightxWidthxLength	mm	535x584x224	535x794x224	535x1,000x224	535x1,214x249	535x584x224	535x794x224	535x1,000x224	535x1,214x249
Weight	Unit	kg									
Air filter	Type	Polypropylene net									
Fan	Type	Centrifugal									
	Quantity			1	2			1	2		
	Air flow rate	High	m <sup>3</sup> /h	344	442	785	1,393	327	431	763	1,362
		Medium	m <sup>3</sup> /h	271	341	605	1,022	261	332	593	1,007
Low		m <sup>3</sup> /h	211	241	470	642	205	237	460	636	
Total sound power level	High	dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0	
	Medium	dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0	
	Low	dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0		
Sound pressure level	High	dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0	
	Medium	dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0	
	Low	dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0		
Electric heater	Power input (Optional)	kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-	
Piping connections	Drain OD	mm	16								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230								
Control systems	Wired remote control	FWEC3A / FWEC3A / FWTOUCH									

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Concealed flexi type unit

AC fan motor unit for horizontal or vertical concealed mounting

- › Quick fixing system for wall or ceiling mounted installation
- › Pre-assembled 3-way/4-port on/off valves are available
- › Valve packages are insulated, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › The air filter can easily be removed for cleaning
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats
- › Available static pressure up to 50Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWM-DAT



FWM-DAF

Indoor unit			FWM-DAT/DAF	01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10				
			<b>2-pipe</b>											<b>4-pipe</b>													
Cooling capacity (standard conditions)	Total capacity	High	kW	1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64				
		Medium	kW	1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99				
		Low	kW	1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96				
	Sensible capacity	High	kW	1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61				
		Medium	kW	0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40				
		Low	kW	0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91				
Heating capacity (standard conditions)	High	kW	1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76	2.53	2.68	4.20	3.82	4.64	6.97	7.35						
	Medium	kW	1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56	2.18	2.31	3.47	3.22	4.07	6.02	6.29						
	Low	kW	1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36	1.78	1.88	2.82	2.73	3.55	5.02	4.85						
Power input	High	kW	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244	0.037	0.053	0.057	0.056	0.065	0.098	0.182	0.244									
	Medium	kW	0.03		0.04		0.05	0.06	0.07	0.13	0.17	0.03		0.04		0.05	0.06	0.07	0.13	0.17							
	Low	kW	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11	0.02	0.03	0.02	0.03	0.04	0.05	0.09	0.11									
Dimensions	Unit	HeightxWidthxLength	mm	535x584x224			535x794x224			535x1,000x224			535x1,210x249			535x584x224			535x794x224			535x1,000x224			535x1,210x249		
Weight	Unit		kg	16.5	16.9	21.4	22.1	26.3	26.4	26.6	35.4	16.5	16.9	21.4	22.1	26.3	26.4	26.6	35.4								
Air filter	Type			Polypropylene net																							
Fan	Type			Centrifugal																							
	Quantity			1					2					1					2								
	Air flow rate	High	m <sup>3</sup> /h	319	344	442	640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362						
	Medium	m <sup>3</sup> /h	233	271	341	450	497	605	771	1,022	225	261	334	332	444	490	593	765	1,007								
	Low	m <sup>3</sup> /h	178	211	241	320	361	470	570	642	174	205	238	237	316	356	460	565	636								
Total sound power level	High	dBA	47.0	49.0	50.0	48.0	52.0	53.0	56.0	61.0	67.0	45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0						
	Medium	dBA	42.0	44.0	43.0	42.0	43.0	49.0	54.0	60.0	39.0	44.0	43.0	41.0	45.0	46.0	53.0	54.0	58.0								
	Low	dBA	37.0	38.0	40.0	35.0	36.0	35.0	43.0	47.0	49.0	33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0						
Sound pressure level	High	dBA	42.0	44.0	45.0	43.0	47.0	48.0	51.0	56.0	62.0	40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0						
	Medium	dBA	37.0	39.0	38.0	37.0	38.0	44.0	49.0	55.0	34.0	39.0	38.0	36.0	38.0	41.0	48.0	49.0	53.0								
	Low	dBA	32.0	33.0	35.0	30.0	31.0	30.0	38.0	42.0	44.0	28.0	33.0	29.0	28.0	29.0	32.0	43.0	41.0	43.0							
Electric heater	Power input (Optional)	kW	1.0	1.5	1.6	2.0	3.0	1.0	1.5	1.6	2.0	3.0															
Piping connections	Drain OD	mm	16																								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																								
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWTOUCH																								

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Concealed flexi type unit with low ESP

AC fan motor unit for horizontal or vertical concealed mounting

- › Low unit casing height of 200mm
- › Sirocco Fan leading to low noise operation
- › Open control
- › Factory mounted valve combinations
- › Increased flexibility of capacity setting in the field
- › The air filter can easily be removed for cleaning



FWE-DT



FWE-DF

More details and final information can be found by scanning or clicking the QR codes.

Indoor unit			FWE-DT/FWE-DF		03	04	05	2-pipe				03	04	05	4-pipe										
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.06	2.58	3.12	3.43	3.92	5.22	5.6	1.94	2.06	2.58	3.12	3.42	3.92	5.22	5.6						
		Medium	kW	1.6	1.64	2	2.4	2.79	3.66	4.19	4.41	1.6	1.64	2	2.4	2.79	3.66	4.19	4.41						
		Low	kW	1.22	1.4	1.64	2.01	2.41	2.77	3.1	3.39	1.22	1.4	1.64	2.01	2.42	2.77	3.1	3.39						
		Fan speed 1	kW	1.22	1.21	1.33	1.24	2.07	2.38	2.57	2.81	1.22	1.21	1.33	1.24	2.07	3.22	2.57	2.81						
	Sensible capacity	High	kW	1.59	1.69	2.11	2.56	2.81	3.22	4.28	4.59	1.59	1.69	2.11	2.56	2.81	3.22	4.28	4.59						
		Medium	kW	1.31	1.34	1.64	1.97	2.28	3	3.44	3.61	1.31	1.34	1.64	1.97	2.28	3	3.44	3.61						
		Low	kW	1	1.15	1.35	1.64	1.98	2.27	2.54	2.78	1	1.15	1.35	1.64	1.98	2.27	2.54	2.78						
		Fan speed 1	kW	1	0.99	1.09	1.02	1.7	1.95	2.11	2.3	1	0.99	1.09	1.02	1.7	1.95	2.11	2.3						
	Latent capacity	High	kW	0.35	0.37	0.46	0.56	0.62	0.71	0.94	1.01	0.35	0.37	0.46	0.56	0.62	0.71	0.94	1.01						
		Medium	kW	0.32	0.34	0.43	0.49	0.58	0.66	0.86	0.92	0.32	0.34	0.43	0.49	0.58	0.66	0.86	0.92						
Heating capacity (standard conditions)	Capacity	High	kW	2	2.38	2.89	4	4.37	4.64	5.98	6.35	2.11	2.61	2.94	3.84	4.57	5.83	6.18							
		Medium	kW	1.69	1.99	2.32	3.36	3.6	4.39	4.96	5.17	1.81	2.37	2.58	3.09	3.93	4.34	4.87	5.07						
	Low	kW	1.34	1.78	1.98	2.94	3.15	3.56	3.89	4.17	1.47	2.23	2.36	2.69	3.57	3.87	4.14								
	Fan speed 1	kW	1.34	1.6	1.68	2.13	2.74	3.2	3.37	3.6	1.47	2.11	2.16	1.91	3.22	3.39	3.6								
Power input	High	kW	0.03	0.03	0.04	0.06	0.07	0.10	0.11	0.03	0.03	0.04	0.06	0.07	0.10	0.11									
	Medium	kW		0.03		0.05		0.06			0.03		0.05		0.06										
	Low	kW		0.03			0.04				0.03			0.04											
	Fan speed 1	kW		0.03		0.04		0.03			0.03		0.04		0.03										
Dimensions	Unit	Height	mm													200									
		Width	mm	795				995				1200													
		Depth	mm													610									
	Packed unit	Height	mm													205									
		Width	mm	925				1125				1325													
		Depth	mm													745									
Weight	Unit	kg	17.5	18.5	22	25.5				18	19	22.5	26												
	Packed unit	kg	20	21	25	29				21	22	26	30												
Casing	Colour	Metal																							
	Material	Galvanised sheet metal																							
Air filter	Type	Plastic Frame / PP Filter Net (G1)																							
Fan	Type	Sirocco fan																							
	Quantity	2				3				4				2				3				4			
	Air flow rate	High	m <sup>3</sup> /h	407	385	488	677	725	1032	1116	407	385	488	677	725	1032	1116								
		Medium	m <sup>3</sup> /h	326	306	374	527	570	669	798	846	326	306	374	527	570	669	798	846						
		Low	m <sup>3</sup> /h	235	263	304	446	481	555	619	685	235	263	304	446	481	555	619							
Fan speed 1	m <sup>3</sup> /h	235	227	243	290	397	436	489	535	235	227	243	290	397	436	489									
Total sound power level	High	dBA	45	44	50				57	59	45	44	50				57	59							
	Medium	dBA	39	38	41	44	42	46	51	52	39	38	41	44	42	46	51	52							
	Low	dBA	33	34	37	39	34	34	43	44	33	34	37	39	34	34	43	44							
	Fan speed 1	dBA		33		30	31	38	40		33		30	31	38	40									
Water flow	Cooling	High	l/h	334	354	443	536	589	674	897	962	334	354	443	536	589	674	897	962						
		Medium	l/h	275	282	343	412	479	630	720	757	275	282	343	412	479	630	720	757						
		Low	l/h	210	241	282	345	415	477	534	583	210	241	282	345	415	477	534	583						
		Fan speed 1	l/h	210	209	228	213	354	409	442	483	210	209	228	213	354	409	442	483						
	Heating	High	l/h	344	409	496	689	751	797	1029	1092	182	225	253	330	393	502	531							
		Medium	l/h	290	343	400	577	618	755	852	888	156	203	222	266	338	374	419	436						
		Low	l/h	230	306	341	505	542	613	669	717	126	192	203	231	307	333	356							
		Fan speed 1	l/h	126	182	186	164	277	291	310	230	275	289	366	471	550	579	620							
		Piping connections	Drain	OD	mm																				
					17.3																				
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																						
Current input	High	A	0.01	0.02	0.03	0.02	0.04	0.05	0.01	0.02	0.03	0.02	0.04	0.05											
	Medium	A	0.01	0.02				0.04	0.01	0.02				0.04											
	Low	A	0.01	0.02				0.01	0.03	0.01	0.02				0.01	0.03									

Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 65°C, water temperature drop 10K. | Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. | Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB

# Concealed ceiling unit with low ESP

## AC fan motor unit for horizontal concealed mounting

- › Easy installation and maintenance
- › 4-speed fan motor
- › High power air flow
- › Wired electronic controllers range
- › Available static pressure up to 50Pa
- › Wide operating range
- › Standard left and right side water connection
- › Extended drain pan as standard
- › Factory mounted valve (both left and right side)
- › Nylon filter G2 class
- › Polyethylene insulation



FWE-CT



FWE-CF

More details and final information can be found by scanning or clicking the QR codes.

Indoor unit			FWE-CT/CF															
			02	03	04	06	07	08	10	02	03	04	06	07	08	10		
			2-pipe								4-pipe							
Cooling capacity (standard conditions)	Total capacity	Super high	kW	2.17	3.22	4.34	6.06	6.83	7.84	9.96	2.1	3.16	3.98	6.05	6.78	7.79	9.91	
		High	kW	1.81	2.78	3.49	5.32	5.68	6.92	8.64	1.76	2.69	3.22	5.2	5.61	6.79	8.61	
		Medium	kW	1.6	2.45	2.96	4.56	4.94	6.07	7.51	1.56	2.36	2.7	4.47	4.91	5.98	7.49	
		Low	kW	0.9	1.4	1.8	2.8	3.1	3.9	4.9	0.85	1.40	1.63	2.72	3.10	3.88	4.88	
	Sensible capacity	Super high	kW	1.61	2.44	3.27	4.55	4.83	6.02	7.58	1.55	2.37	3.19	4.49	5.16	5.91	7.45	
		High	kW	1.33	2.08	2.58	3.94	4.3	5.25	6.48	1.28	1.99	2.53	3.81	4.2	5.09	6.39	
		Medium	kW	1.16	1.82	2.16	3.34	3.71	4.56	5.57	1.13	1.73	2.1	3.23	3.64	4.44	5.49	
		Low	kW	0.7	1.2	1.4	2.1	2.5	3.1	3.7	0.66	1.18	1.35	2.02	2.47	3.05	3.65	
	Latent capacity	Super high	kW	0.56	0.78	1.07	1.51	2	1.82	2.38	0.55	0.79	0.79	1.56	1.62	1.88	2.46	
		High	kW	0.48	0.7	0.91	1.38	1.38	1.67	2.16	0.48	0.7	0.69	1.39	1.41	1.7	2.22	
		Super high	kW	2.38	3.66	4.77	6.48	7.96	9.00	11.08	2.02	3.11	4.01	5.43	6.69	7.50	9.15	
		High	kW	1.96	3.13	3.76	5.61	6.53	7.84	9.43	1.71	2.69	3.31	4.73	5.65	6.62	8.06	
Heating capacity (standard conditions)	Medium	kW	1.72	2.74	2.81	4.73	5.62	6.78	8.08	1.54	2.41	2.83	4.13	5.03	5.91	7.10		
	Low	kW	1.02	1.70	1.93	2.85	3.75	4.49	5.30	0.90	1.51	1.79	2.53	3.45	4.04	4.77		
	Super high	kW	0.046	0.069	0.083	0.119	0.163	0.181	0.23	0.046	0.069	0.083	0.119	0.163	0.181	0.23		
	High	kW	0.039	0.054	0.059	0.093	0.128	0.145	0.18	0.039	0.054	0.059	0.093	0.128	0.145	0.18		
Power input	Medium	kW	0.034	0.047	0.05	0.073	0.105	0.117	0.145	0.034	0.047	0.05	0.073	0.105	0.117	0.145		
	Low	kW	0.029	0.04	0.042	0.06	0.089	0.102	0.121	0.029	0.04	0.042	0.06	0.089	0.102	0.121		
	Super high	mm	253															
	Unit Packed unit	mm	590															
Dimensions	Height	mm	260															
		mm	605															
	Width	mm	720	890	1020	1220	1470	1570	1830	720	890	1020	1220	1470	1570	1830		
		mm	720	890	1020	1220	1470	1570	1830	720	890	1020	1220	1470	1570	1830		
Weight	Unit	kg	17.0	20.2	23.7	28.4	36.7	39.1	45.5	18.1	21.6	25.3	30.1	39.7	41.4	48.9		
	Operation weight	kg	17.0	20.2	23.7	28.4	36.7	39.1	45.5	18.1	21.6	25.3	30.1	39.7	41.4	48.9		
	Packed unit	kg	18.8	22.4	26.1	31.1	40.0	42.3	49.2	19.9	23.8	27.7	32.9	43.0	44.6	52.6		
	Colour	Metal																
Casing	Material	Galvanised steel																
	Type	Aluminium Frame PP Filter Net G2 Class																
Air filter	Type	Centrifugal (Blade: Forward - curve)																
	Quantity	1 2 3 4 1 2 3 4																
Fan	Air flow rate	Super high	m <sup>3</sup> /h	430	638	910	1195	1559	1753	2177	416	626	835	1193	1548	1742	2166	
		High	m <sup>3</sup> /h	311	518	619	926	1188	1413	1735	302	501	571	905	1173	1386	1729	
		Medium	m <sup>3</sup> /h	238	385	413	630	851	1016	1202	232	371	377	618	846	1001	1199	
		Low	m <sup>3</sup> /h	150	256	284	426	569	688	808	142	256	257	414	569	684	804	
Total sound power level	Super high	dBA	51	61	58	62	62	64	65	51	61	58	62	62	64	65		
		High	dBA	49	56	50	55	57	58	60	49	56	50	55	57	58	60	
		Medium	dBA	37	49	40	48	47	50	50	37	49	40	48	47	50	50	
		Low	dBA	31	38	32	39	38	41	40	31	38	32	39	38	41	40	
Sound pressure level	Super high	dBA	41	51	48	52	52	54	55	41	51	48	52	52	54	55		
		High	dBA	39	46	38	45	47	48	49	39	46	38	45	47	48	49	
		Medium	dBA	26	39	28	36	37	40	39	26	39	28	36	37	40	39	
		Low	dBA	21	28	22	29	27	31	29	21	28	22	29	27	31	29	
Water flow	Cooling	Super high	l/h	254.4	381.6	525.6	768.0	886.2	1023.0	1228.8	246.0	374.4	478.2	767.4	879.0	918.0	1222.8	
		High	l/h	212.4	330.6	404.4	668.4	733.2	899.4	1050.0	206.4	319.8	372.6	652.8	724.2	800.4	1045.8	
		Medium	l/h	190.8	294.0	342.6	558.6	631.2	783.6	870.0	188.4	284.4	312.6	546.6	627.6	705.0	866.4	
		Low	l/h	114.6	183.6	208.8	327.0	388.2	496.8	565.2	108.6	183.6	192.6	318.6	388.2	459.0	562.8	
	Heating	Super high	l/h	448.8	692.4	898.8	1216.2	1562.4	1757.4	2085.0	333.6	514.8	657.6	881.4	1153.2	1243.2	1501.2	
		High	l/h	369.6	592.2	707.4	1051.2	1279.2	1530.6	1773.0	280.2	445.2	540.0	763.8	970.2	1093.8	1318.2	
		Medium	l/h	325.8	518.4	592.8	821.4	969.6	1172.4	1520.4	252.6	398.4	460.2	663.6	861.0	974.4	1156.2	
		Low	l/h	192.0	321.6	363.6	530.4	650.4	780.0	995.4	147.6	250.2	289.8	405.6	589.2	664.8	773.4	
Piping connections	Drain OD	mm	R 3/4"															
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230															
Current input	Super high	A	0.21	0.31	0.37	0.53	0.73	0.81	1.03	0.21	0.31	0.37	0.53	0.73	0.81	1.03		
	High	A	0.17	0.24	0.26	0.43	0.58	0.65	0.78	0.17	0.24	0.26	0.43	0.58	0.65	0.78		
	Medium	A	0.15	0.21	0.22	0.33	0.47	0.52	0.65	0.15	0.21	0.22	0.33	0.47	0.52	0.65		
	Low	A	0.13	0.18	0.19	0.27	0.40	0.46	0.54	0.13	0.18	0.19	0.27	0.40	0.46	0.54		

# Concealed ceiling unit with medium ESP

BLDC fan motor unit for horizontal concealed mounting. Continuous air flow regulation and fan speed modulation

- › Blends unobtrusively with any interior decor: only the suction and discharge grilles are visible
- › Up to 50% energy savings with brush-less DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Heat exchanger up to 4 rows
- › Available static pressure up to 80Pa at maximum speed



FWP-CT



FWP-CF

More details and final information can be found by scanning or clicking the QR codes.

Indoor unit	FWP-CT/CF	04		05			06			08			10			11			15			17			
		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
<b>2-pipe</b>																									
Speed																									
Declared speed		2,5,7																							
Control voltage (E)	V	2,90	8,00	9,00	4,30	7,50	8,40	4,50	7,40	8,30	5,40	8,30	9,90	3,40	7,60	8,50	3,40	7,60	8,50	6,80	7,50	8,30	6,80	7,50	8,30
Rated air flow (E)	m³/h	109	246	276	171	275	341	195	360	402	305	532	652	333	687	760	333	687	760	1050	1163	1289	1050	1163	1289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	6	25	33	10	24	39	10	26	35	22	51	77	11	54	68	11	54	68	105	128	162	105	128	162
Maximum current absorption	A	0,32		0,60			0,84			0,84			0,91			0,91			3,52			3,52			
Total cooling capacity (1)(E)	kW	0,93	1,76	1,95	1,29	1,95	2,34	1,59	2,74	3,04	1,98	3,26	3,79	2,29	4,34	4,75	2,51	4,91	5,35	6,28	6,81	7,38	7,04	7,64	8,28
Sensible cooling capacity (1)(E)	kW	0,62	1,25	1,39	0,91	1,39	1,66	1,09	1,91	2,11	1,48	2,48	2,92	1,67	3,21	3,51	1,77	3,45	3,76	4,64	5,03	5,46	4,96	5,38	5,84
FCEER class (E)		A																							
Water flow (2)	l/h	161	306	340	222	339	408	274	476	527	343	568	664	394	753	828	432	850	930	1094	1190	1295	1225	1332	1448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	-
Heating capacity (3)(E)	kW	0,88	1,21	1,99	1,33	1,98	2,35	1,59	2,80	3,10	2,35	3,71	4,31	2,54	4,76	5,17	2,63	5,03	5,49	6,68	7,22	7,80	7,18	7,80	8,46
FCCOP class (E)		A																							
Water flow (3)	l/h	153	315	346	231	345	408	276	488	538	408	644	749	441	827	898	457	875	955	1162	1256	1356	1248	1355	1471
Water pressure drop (3)(E)	kPa	1	4	5	2	5	7	2	6	8	4	9	11	2	7	8	3	9	11	12	14	16	17	19	22
Standard coil - number of rows		3																							
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm³	1,20																							
Cross-section area of power cables (5)	mm²	1,00																							
<b>4-pipe</b>																									
Speed																									
Declared speed		2,5,7																							
Control voltage (E)	V	2,90	7,90	8,90	4,50	7,30	8,90	4,50	7,40	8,30	5,40	8,30	9,90	3,40	7,60	8,50	3,40	7,60	8,50	6,80	7,50	8,30	6,80	7,50	8,30
Rated air flow (E)	m³/h	109	243	270	170	272	336	195	357	398	302	524	642	333	683	755	333	683	755	1050	1163	1289	1050	1163	1289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	6	25	32	10	23	39	10	26	35	21	50	77	11	54	67	11	54	67	105	128	162	105	128	162
Maximum current absorption	A	0,32		0,60			0,84			0,84			0,91			0,91			3,52			3,52			
Total cooling capacity (1)(E)	kW	0,93	1,74	1,91	1,28	1,93	2,31	1,59	2,72	3,01	1,95	3,22	3,75	2,29	4,32	4,72	2,51	4,88	5,32	6,28	6,81	7,38	7,04	7,64	8,28
Sensible cooling capacity (1)(E)	kW	0,62	1,24	1,36	0,90	1,38	1,64	1,09	1,89	2,09	1,47	2,44	2,89	1,67	3,19	3,48	1,77	3,43	3,74	4,64	5,03	5,46	4,96	5,38	5,84
FCEER class (E)		A																							
Water flow (2)	l/h	161	302	333	221	335	404	274	473	522	339	562	656	394	749	822	432	846	925	1094	1190	1295	1225	1332	1448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	1,14	1,93	2,06	1,55	2,07	2,32	2,09	3,09	3,29	2,80	3,82	4,24	3,40	5,17	5,45	3,40	5,17	5,45	6,42	6,73	7,06	6,42	6,73	7,06
FCCOP class (E)		A																							
Water flow (3)	l/h	100	169	180	136	181	204	183	271	288	245	334	371	297	452	477	297	452	477	562	589	618	562	589	618
Water pressure drop (3)(E)	kPa	1	2	3	2	3	3	2	3	4	3	5	6	6	13	14	6	13	14	19	21	22	19	21	22
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Standard coil - number of rows	dB(A)	3+1		3+1			4+1			3+1			3+1			4+1			3+1			4+1			
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm³	0,47																							
Cross-section area of power cables (5)	mm²	1,00																							
Power supply cable type		N07V-K																							
Safety fuse F	A	1		1			1			1			1			1			2			2			
Fuses type		gG																							
Power supply	Phase/Frequency	1~/50																							
Control systems	Wired remote control	FWEC3A / FWEC3A / FWTOUCH																							

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015 | (2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) | (3) Water temperature 45°C / 40°C, air temperature 20°C | (4) Sound power measured according to standards ISO 3741 and ISO 3742 | (5) Sound pressure measured at a distance of 4 m in a free field with a directivity factor of 1 | (E) EUROVENT certified data

# Concealed ceiling unit with medium ESP

AC fan motor unit for horizontal concealed mounting

- › Compact dimensions, can easily be mounted in a narrow ceiling void
- › Heat exchanger up to 4 rows
- › Drain pan to collect the condensate from: heat exchanger and regulating valves -reversible water connections
- › The air filter can easily be removed for cleaning
- › Available static pressure up to 80Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWB-CT



FWB-CF

Indoor unit	FWB-CT/CF	04		05			06			08			10			11			15			17			
		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
<b>2-pipe</b>																									
Declared speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Rated air flow (E)	m <sup>3</sup> /h	109	246	276	171	275	341	195	360	402	305	532	652	333	687	760	333	687	760	1050	1163	1289	1050	1163	1289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	24	57	82	34	69	106	34	85	106	76	143	192	76	167	192	76	167	192	235	280	332	235	280	332
Maximum current absorption	A	0,40			0,56			0,56			1,10			1,10			1,10			2,10			2,10		
Total cooling capacity (1)(E)	kW	0,92	1,72	1,90	1,27	1,90	2,27	1,57	2,69	2,96	1,92	3,17	3,68	2,22	4,22	4,63	2,44	4,79	5,23	6,15	6,66	7,21	6,91	7,49	8,12
Sensible cooling capacity (1)(E)	kW	0,61	1,21	1,34	0,89	1,34	1,59	1,07	1,86	2,03	1,42	2,39	2,81	1,60	3,09	3,39	1,70	3,33	3,64	4,51	4,88	5,29	4,83	5,23	5,67
FCEER class (E)		D																							
Water flow (1)	l/h	160	306	340	222	339	408	274	476	527	343	568	664	394	753	828	432	850	930	1095	1191	1295	1225	1333	1448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	0,88	1,81	1,99	1,33	1,98	2,35	1,59	2,80	3,10	2,35	3,71	4,31	2,54	4,76	5,17	2,63	5,03	5,49	6,68	7,22	7,80	7,18	7,80	8,46
FCCOP class (E)		D																							
Water flow (3)	l/h	153	315	346	231	345	408	276	488	538	408	644	749	442	827	898	457	875	955	1162	1256	1357	1248	1356	1472
Water pressure drop (3)(E)	kPa	1	4	5	2	5	7	2	6	8	4	9	11	2	7	8	3	9	11	12	14	16	17	20	23
Standard coil - number of rows		3			3			4			3			3			4			3			4		
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	37	50	58	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	47	56	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm <sup>3</sup>	1,20			1,20			1,60			1,60			2,50			3,30			2,50			3,30		
Power supply cable type		N07V-K																							
Cross-section area of power cables (5)	mm <sup>2</sup>	1,00			1,00			1,00			1,50			1,50			1,50			1,50			1,50		
Safety fuse F	A	1			1			1			2			2			2			2			2		
Fuses type		gG																							
Power supply Phase/Frequency	Hz	1~/50																							
Control systems Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWEC3A / FWTOUCH																							
<b>4-pipe</b>																									
Declared speed		2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7		
Rated air flow (E)	m <sup>3</sup> /h	109	243	270	170	272	336	195	357	398	302	524	642	333	683	755	333	683	755	1050	1163	1289	1050	1163	1289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	24	57	82	34	69	106	34	85	106	76	143	192	76	167	192	76	167	192	235	280	332	235	280	332
Maximum current absorption	A	0,40			0,56			0,56			1,10			1,10			1,10			2,10			2,10		
Total cooling capacity (1)(E)	kW	0,92	1,70	1,86	1,26	1,88	2,24	1,57	2,67	2,93	1,89	3,13	3,64	2,22	4,20	4,60	2,44	4,76	5,20	6,15	6,66	7,21	6,91	7,49	8,12
Sensible cooling capacity (1)(E)	kW	0,61	1,20	1,31	0,88	1,33	1,57	1,07	1,84	2,01	1,41	2,35	2,78	1,60	3,07	3,36	1,70	3,31	3,62	4,51	4,88	5,29	4,83	5,23	5,67
FCEER class (E)		D																							
Water flow (1)	l/h	160	302	333	221	335	404	274	473	522	339	562	656	394	749	822	432	846	925	1095	1191	1295	1225	1333	1448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	1,14	1,93	2,06	1,55	2,07	2,32	2,09	3,09	3,29	2,80	3,82	4,24	3,40	5,17	5,45	3,40	5,17	5,45	6,42	6,73	7,06	6,42	6,73	7,06
FCCOP class (E)		D																							
Water flow (3)	l/h	100	169	180	136	181	204	183	271	288	245	334	371	297	452	477	297	452	477	562	590	618	562	590	618
Water pressure drop (3)(E)	kPa	1	2	3	2	3	3	2	3	4	3	5	6	6	13	14	6	13	14	19	21	22	19	21	22
Total sound power level	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Additional coil - number of rows (4)	dB(A)	1																							
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	37	48	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm <sup>3</sup>	0,47			0,59			0,59			0,97			0,97			0,97			0,97			0,97		

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015 | (2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) | (3) Water temperature 65°C / 55°C, air temperature 20°C | (4) Sound power measured according to standards ISO 3741 and ISO 3742 | (5) Sound pressure measured at a distance of 4 m in a free field with a directivity factor of 1 | (E) EUROVENT certified data

# Concealed ceiling unit with high ESP

BLDC fan motor unit for horizontal or vertical mounting. Continuous air flow regulation and fan speed modulation

- › Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- › Instant adjustment to temperature and relative humidity changes
- › Low operating sound level
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › The air filter can easily be removed for cleaning
- › Straight duct connector mounted to discharge side
- › Available static pressure up to 120Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWN-AT



FWN-AF

Indoor unit			FWN-AT/AF		04	05	06	07	08	10	04	05	06	07	08	10
			2-pipe						4-pipe							
Cooling capacity (standard conditions)	Total capacity	High	kW	3.80	4.65	6.01	6.65	7.57	8.49	3.76	4.61	5.91	6.55	7.46	8.35	
		Medium	kW	3.47	4.20	5.65	6.25	6.84	7.62	3.44	4.17	5.58	6.17	6.75	7.52	
		Low	kW	2.83	3.38	5.22	5.78	6.20	6.84	2.82	3.36	5.17	5.71	6.14	6.77	
	Sensible capacity	High	kW	2.98	3.56	4.47	5.04	6.29	6.83	2.95	3.53	4.39	4.97	6.19	6.71	
		Medium	kW	2.70	3.19	4.20	4.73	5.60	6.07	2.68	3.17	4.15	4.66	5.52	5.98	
		Low	kW	2.19	2.54	3.90	4.35	5.01	5.40	2.18	2.52	3.84	4.30	4.96	5.34	
Heating capacity (standard conditions)	High	kW	4.05	4.83	6.42	7.26	7.88	8.93	3.91	3.89	5.72	5.65	7.99	7.94		
	Medium	kW	3.69	4.36	6.03	6.80	7.11	8.04	3.68	3.66	5.51	5.45	7.47	7.44		
	Low	kW	3.04	3.55	5.59	6.29	6.47	7.28	3.23	3.23	5.25	5.21	7.02	6.99		
Power input	High	kW	0.112		0.152		0.248		0.112		0.152		0.248			
	Medium	kW	0.07		0.13		0.17		0.73		0.13		0.17			
	Low	kW	0.04		0.10		0.12		0.45		0.40		0.12			
FCEER			C	B	C				B		C					
FCCOP			B	A	B		C		B		C					
Dimensions	Unit	HeightxWidthxLength	mm	559x754x280		559x964x280		559x1,170x280		559x754x280		559x964x280		559x1,170x280		
Weight	Unit		kg	32.5	33.3	40.6	41.7	47.3	48.7	34.7	35.5	43.2	44.4	50.3	51.7	
Air filter	Type		Acrylic - Filtering class EU2													
Fan	Type		Centrifugal													
	Quantity		1		2		1		2							
	Air flow rate	High	m <sup>3</sup> /h	802	791	1,238	1,203	1,606	1,581	793	783	1,211	1,182	1,576	1,550	
		Medium	m <sup>3</sup> /h	700	692	1,134	1,107	1,384	1,371	694	686	1,115	1,088	1,362	1,349	
Low		m <sup>3</sup> /h	534	532	1,019	1,000	1,207	1,198	531	529	1,005	985	1,192	1,184		
Total sound power level	High	dBA	66.0		69.0		72.0		66.0		69.0		72.0			
	Medium	dBA	61.0		63.0		67.0		61.0		63.0		67.0			
	Low	dBA	54.0	59.0	61.0	62.0	54.0	59.0	61.0	62.0						
Sound pressure level	High	dBA	61.0		64.0		67.0		61.0		64.0		67.0			
	Medium	dBA	56.0		58.0		62.0		56.0		58.0		62.0			
	Low	dBA	49.0		54.0		56.0		49.0		54.0		56.0			
Electric heater	Power input (Optional)	kW	2.0		6.0		9.0		2.0		6.0		9.0			
Piping connections	Drain OD	mm	17													
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230													
Control systems	Wired remote control		FWEC3A / FWEC3A / FWTOUCH													

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue



# Concealed ceiling unit with high ESP

AC fan motor unit for horizontal or vertical concealed mounting

- › Quick fixing system for wall or ceiling mounted installation
- › Straight duct connector mounted to discharge side
- › The air filter can easily be removed for cleaning
- › Available static pressure up to 180Pa at maximum speed



More details and final information can be found by scanning or clicking the QR codes.



FWD-AT



FWD-AF

Indoor unit			FWD-AT/AF														
			04	06	08	10	12	16	18	04	06	08	10	12	16	18	
			2-pipe						4-pipe								
Cooling capacity (standard conditions)	Total capacity	High	kW	3.65	5.71	7.33	8.25	11.86	15.92	17.74	3.62	5.60	7.20	8.10	11.66	15.84	17.66
		Medium	kW	3.36	5.39	6.63	7.41	10.12	13.83	15.36	3.33	5.32	6.54	7.31	10.00	13.77	15.29
		Low	kW	2.74	4.99	6.03	6.68	8.42	11.63	12.92	2.73	4.92	5.97	6.61	8.33	11.59	12.87
	Sensible capacity	High	kW	2.83	4.16	6.04	6.58	9.22	12.21	13.49	2.80	4.08	5.94	6.46	9.06	12.14	13.41
		Medium	kW	2.59	3.94	5.39	5.86	7.75	10.43	11.40	2.57	3.89	5.31	5.77	7.66	10.38	11.34
		Low	kW	2.10	3.66	4.84	5.23	6.35	8.61	9.37	2.09	3.60	4.79	5.17	6.29	8.58	9.34
Heating capacity (standard conditions)	High	kW	4.05	6.42	7.88	8.93	12.72	17.29	19.05	3.91	5.72	7.99	7.94	14.43	19.30	19.20	
	Medium	kW	3.69	6.03	7.11	8.04	10.84	15.05	16.40	3.68	5.51	7.47	7.44	12.63	17.17	17.03	
	Low	kW	3.04	5.59	6.47	7.28	9.06	12.68	13.73	3.23	5.25	7.02	6.99	10.86	14.88	14.79	
Power input	High	kW	0.265	0.460	0.505	0.750	1.300	0.265	0.460	0.505	0.750	1.300					
	Medium	kW	0.19	0.39	0.38	0.54	1.09	0.19	0.39	0.38	0.54	1.09					
	Low	kW	0.14	0.35	0.29	0.37	0.87	0.14	0.35	0.29	0.37	0.87					
Dimensions	Unit	HeightxWidthxLength	mm	559x754x280	559x964x280	559x1,170x280	718x1,170x353	718x1,380x353	559x754x280	559x964x280	559x1,170x280	718x1,170x353	718x1,380x353				
Weight	Unit		kg	32.5	40.6	47.3	48.7	65.3	77.0	79.5	34.7	43.2	50.3	51.7	70.9	83.4	85.9
Air filter	Type		Acrylic fiber - Filtering class G2 (G4 on request)														
Fan	Type		Centrifugal														
	Quantity		1	2						1	2						
	Air flow rate	High	m <sup>3</sup> /h	802	1,241	1,609	1,584	2,380	3,206	3,175	794	1,212	1,573	1,550	2,328	3,186	3,155
		Medium	m <sup>3</sup> /h	700	1,134	1,384	1,371	1,898	2,641	2,604	694	1,115	1,362	1,349	1,871	2,626	2,590
Low		m <sup>3</sup> /h	534	1,021	1,208	1,200	1,485	2,092	2,073	532	1,004	1,194	1,186	1,466	2,084	2,065	
Total sound power level	High	dBA	66.0	69.0	72.0	74.0	78.0	66.0	69.0	72.0	74.0	78.0					
	Medium	dBA	61.0	63.0	67.0	67.0	73.0	61.0	64.0	67.0	67.0	73.0					
	Low	dBA	54.0	59.0	62.0	60.0	69.0	54.0	61.0	62.0	60.0	69.0					
Sound pressure level	High	dBA	61.0	64.0	67.0	69.0	73.0	61.0	64.0	67.0	69.0	73.0					
	Medium	dBA	56.0	58.0	62.0	62.0	68.0	56.0	59.0	62.0	62.0	68.0					
	Low	dBA	49.0	54.0	57.0	55.0	64.0	49.0	56.0	57.0	55.0	64.0					
Electric heater	Power input (Optional)	kW	2.0	6.0	9.0		12.0	2.0	6.0	9.0		12.0					
Piping connections	Drain OD	mm	17														
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230														
Control systems	Wired remote control		FWEC1A / FWEC2A / FWEC3A / FWEC3A / FWEC3A / FWEC3A / FWTOUCH														

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

# Wall mounted unit

## AC fan motor unit for wall mounting

- › High aesthetic cabinet design
- › Optimum air distribution
- › Easy to install
- › Wireless remote control up to 9 m distance
- › 3-speed fan motor
- › Wide operating range
- › Low operating sound level thanks to tangential fan
- › Insulated with self-extinguishing class 1 heat insulation
- › Removable washable air filter (self-extinguishing class 1)



More details and final information can be found by scanning or clicking the QR codes.



FWT-GT

Indoor unit			FWT-GT	02	03	04	05	06
			<b>2-pipe</b>					
Cooling capacity (standard conditions)	Total capacity	High	kW	2.40	2.67	3.27	4.49	5.21
		Medium	kW	2.20	2.23	2.79	4.02	4.32
		Low	kW	1.94	2.02	2.52	3.76	4.04
Sensible capacity		High	kW	1.82	1.99	2.60	3.38	4.03
		Medium	kW	1.73	1.69	2.21	3.00	3.52
		Low	kW	1.50	1.49	1.91	2.77	3.22
Heating capacity (standard conditions)		High	kW	2.71	2.96	3.71	5.07	6.23
		Medium	kW	2.41	2.62	3.29	4.51	5.38
		Low	kW	2.06	2.25	2.75	4.03	4.83
Power input		High	kW	0.031	0.032	0.042	0.053	0.072
		Medium	kW	0.03		0.04	0.05	0.07
		Low	kW	0.03			0.04	0.06
FCEER				D		C		D
FCCOP				C				
Dimensions	Unit	HeightxWidthxLength	mm	288x800x206			310x1,070x224	
Weight	Unit		kg	9.00			14.0	
Casing	Colour	White						
Air filter	Type	Washable Saranet						
Fan	Type	Cross flow fan						
	Quantity	1						
	Air flow rate	High	m <sup>3</sup> /h	442	476	629	866	1,053
Total sound power level		Medium	m <sup>3</sup> /h	391	425	544	765	883
		Low	m <sup>3</sup> /h	340	374	442	663	782
		High	dBA	45.0	48.0	55.0		59.0
Sound pressure level		Medium	dBA	41.0	44.0	50.0	51.0	54.0
		Low	dBA	36.0	39.0	45.0	47.0	51.0
		High	dBA	34.0	35.0	42.0		46.0
Piping connections	Drain OD	High	dBA	29.0	30.0	39.0	38.0	42.0
		Medium	dBA	25.0		32.0	34.0	39.0
		Low	dBA					
Power supply	Phase/Frequency/Voltage	Hz/V	19					
Control systems	Infrared remote control	1N~/50/220-240						
		Wired remote control	WRC-HPC					
			MERCA / SRC-HPA					

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue



## Options & accessories - Fan coil units: Panels and Controls

INDOOR UNITS	FWC-BT/BF	FWF-BT/BF	FWH-A	FWI-A	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF	FWL-DAT/DAF	
Panels	Decoration panel 600x600 (2-pipe)		BYFQ60B3	FPAN02A (2 up to 4 class)	FPAN02A (2 up to 4 class)				
	Decoration panel 900x900 (2-pipe)	BYCQ140C		FPAN06A (6 up to 8 class)	FPAN06A (6 up to 8 class)				
	Decoration panel 600x600 (4-pipe)			FPAN02A (2 up to 4 class)	FPAN02A (2 up to 4 class)				
	Decoration panel 900x900 (4-pipe)	BYCQ140C		FPAN06A (6 up to 8 class)	FPAN06A (6 up to 8 class)				
	Panel spacer for reducing required installation height	KDBQ44B60							
	Sealing member of air discharge outlet	KDBHQ55C140	KDBH44BA60						
	Rear panel					ERPVO2A6 (2 class) ERPVO3A6 (3 class) ERPVO6A6 (6 class) ERPVI0A6 (8 class)	ERPVO2A6 (2 class) ERPVO3A6 (3 class) ERPVO6A6 (6 class) ERPVI0A6 (8 class)	ERPVO2A6 (1,15 & 2 class) ERPVO3A6 (25 & 3 class) ERPVO6A6 (35, 4 & 6 class) ERPVI0A6 (8 & 10 class)	
	Air intake & discharge grille					EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	EAIDF02A6 (1,15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)	
	Individual control systems & network	Wired remote controller (standard)	BRC315D	BRC315D	FWEC1A			FWEC1A	FWEC1A
		Wired remote controller (advanced)			FWEC2A			FWEC2A	FWEC2A
Wired remote controller (advanced Plus)				FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	
Wired remote controller (heat pump)									
Wireless controller (heat pump)		BRC7F532F	BRC7E530						
Controller electromechanical							ECFWMB6	ECFWMB6	
Split controller - power control board				FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	
Split controller - control panel				FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	
Split controller - touch screen control panel				FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	
On-board mounting kit						FWECKA	FWECKA	FWECKA	
Wall-mounting kit						FWFCKA	FWFCKA	FWFCKA	
Centralised control systems		Central remote control	DCS302CA51	DCS302CA51					
	Unified ON/OFF control	DCS301BA51	DCS301BA51						
	Schedule timer	DST301BA51	DST301BA51						
Building Management System & Standard protocol interface	Intelligent Touch Manager	DCM601A5A	DCM601A5A						
	Intelligent Touch Controller	DCS601C51C	DCS601C51C						

1. Decoration panel code includes wireless controller

Options & accessories - Fan coil units: Panels and Controls

FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-CT/CF	FWP-CT/CF	FWB-CT/CF	FWD-AT/AF	FWN-AT/AF	FWT-GT
EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	EAIDF02A6 (1, 15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)							
	FWEC1A	FWEC1A	FWEC1A		FWEC1A	FWEC1A		MERCA
	FWEC2A	FWEC2A	FWEC2A		FWEC2A	FWEC2A		
FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	
								SRC-HPA
								WRC-HPC
	ECFWMB6							
FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	FWECSAP	
FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	FWECSAC	
FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	FWTOUCHW (white) FWTOUCHB (black) FWTOUCHG (grey)	
FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	

## Options & accessories - Fan coil units: Filters and Valves

INDOOR UNITS		FWC-BT/BF	FWF-BT/BF	FWH-A	FWI-A	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF	FWL-DAT/DAF
ON/OFF valves 230V	3-ways 230V ON/OFF valve kit (2-pipe)	EKMV3C09B	EKMV3C09B	E2C3V02A (2 up to 4 class) E2C3V06A (6 up to 8 class)	E2C3V02A (2 up to 4 class) E2C3V06A (6 up to 8 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)
	3-ways 230V ON/OFF valve kit (4-pipe)	EKMV3C09B x2	EKMV3C09B x2	E4C3V02A (2 up to 4 class) E4C3V06A (6 up to 8 class)	E4C3V02A (2 up to 4 class) E4C3V06A (6 up to 8 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)
	2-ways 230V ON/OFF valve kit (2-pipe)	EKMV2C09B	EKMV2C09B	E2C2V02A (2 up to 4 class) E2C2V06A (6 up to 8 class)	E2C2V02A (2 up to 4 class) E2C2V06A (6 up to 8 class)				
	2-ways 230V ON/OFF valve kit (4-pipe)	EKMV2C09B x2	EKMV2C09B x2	E4C2V02A (2 up to 4 class) E4C2V06A (6 up to 8 class)	E4C2V02A (2 up to 4 class) E4C2V06A (6 up to 8 class)				
	2-ways 230V ON/OFF valve kit (cooling heat exchanger)					E2MV2B07A6 (2, 3 & 6 class) E2MV2B10A6 (8 class)	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)	E2MV2B07A6 (2 up to 6 class) E2MV2B10A6 (8 class)	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)
	2-ways 230V ON/OFF valve kit (additional heat exchanger)					E2MV2B07A6	E2MV2B07A6	E2MV2B07A6	E2MV2B07A6
	3-ways 230V ON/OFF valve kit (additional heat exchanger)								
	Simplified 3-ways 230V ON/OFF valve kit (2-pipe)					E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)	E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)
Simplified 3-ways 230V ON/OFF valve kit (4-pipe)					E4MVD03A6 (2 & 3 class) E4MVD06A6 (6 class) E4MVD10A6 (8 class)	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (2 & 3 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	
ON/OFF valves 24V	3-ways 24V ON/OFF valve kit (2-pipe)			E2C324V02A (2 up to 4 class) E2C324V06A (6 up to 8 class)	E2C324V02A (2 up to 4 class) E2C324V06A (6 up to 8 class)				
	2-ways 24V ON/OFF valve kit (2-pipe)			E2C224V02A (2 up to 4 class) E2C224V06A (6 up to 8 class)	E2C224V02A (2 up to 4 class) E2C224V06A (6 up to 8 class)				
	3-ways 24V ON/OFF valve kit (cooling heat exchanger)					E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)	E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)
	3-ways 24V ON/OFF valve kit (4-pipe)			E4C324V02A (2 up to 4 class) E4C324V06A (6 up to 8 class)	E4C324V02A (2 up to 4 class) E4C324V06A (6 up to 8 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)
	2-ways 24V ON/OFF valve kit (cooling heat exchanger)					E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)	E2M2V207A6 (1 up to 6 class) E2M2V210A6 (8 & 10 class)	E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)	E2M2V207A6 (1 up to 35 class) E2M2V210A6 (8 & 10 class)
	2-ways 24V ON/OFF valve kit (additional heat exchanger)					E2M2V207A6	E2M2V207A6	E2M2V207A6	E2M2V207A6
	2-ways 24V ON/OFF valve kit (4-pipe)			E4C224V02A (2 up to 4 class) E4C224V06A (6 up to 8 class)	E4C224V02A (2 up to 4 class) E4C224V06A (6 up to 8 class)				

FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-CT/CF	FWP-CT/CF	FWB-CT/CF	FWD-AT/AF	FWN-AT/AF	FWT-GT
E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E3V2VN02V3WA	EK2MV3B10CS	E4V2N05OV3WA (4 & 5 class) E4V2N08OV3WA (6 & 8 class) E2MV10B6 (10 up to 17 class)	E4V2N05OV3WA (4 & 5 class) E4V2N08OV3WA (6 & 8 class) E2MV10B6 (10 up to 17 class)	ED2MV04A6 (4 class) ED2MV10A6 (6, 8 & 10 class) ED2MV12A6 (12 class) ED2MV18A6 (16 & 18 class)	ED2MV04A6 (4 & 5 class) ED2MV10A6 (6 up 10 class)	
E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E3V4VN02V3WA	EK4MV3B10CS	E4V2N05OV3WA + E4VHN08OV3WA (4 up to 5 class) E4V2N08OV3WA + E4VHN08OV3WA (6 up to 8 class) E2MV10B6 + E4VHN17OV3WA (10 up to 17 class)	E4V2N05OV3WA + E4VHN08OV3WA (4 up to 5 class) E4V2N08OV3WA + E4VHN08OV3WA (6 up to 8 class) E2MV10B6 + E4VHN17OV3WA (10 up to 17 class)	ED4MV04A6 (4 class) ED4MV10A6 (6, 8 & 10 class) ED4MV12A6 x 2 (12 class) ED4MV18A6 x 2 (16 & 18 class)	ED4MV04A6 (4 & 5 class) ED4MV10A6 (6 up 10 class)	
		E2V2VN01V3WA	EK2MV2B10CS					
		E2V4VN01V3WA	EK4MV2B10CS	E2MV2B07A6 + E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 + E2MV2B07A6 (10 up to 17 class)	E2MV2B07A6 + E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 + E2MV2B07A6 (10 up to 17 class)			
E2MV2B07A6 (2 up to 6 class) E2MV2B10A6 (8 class)	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)			E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 (10 up to 17 class)	E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 (10 up to 17 class)			
E2MV2B07A6	E2MV2B07A6			E2MV2B07A6	E2MV2B07A6			
				E4VHN08OV3WA (4 up to 8 class) E4VHN17OV3WA (10 up to 17 class)	E4VHN08OV3WA (4 up to 8 class) E4VHN17OV3WA (10 up to 17 class)			
E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)							
E4MVD03A6 (2 & 3 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)							
E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)			E4V2N05O24WA (4 & 5 class) E4V2N08O24WA (6 & 8 class) E4V2N17O24WA (10 up to 17 class)	E4V2N05O24WA (4 & 5 class) E4V2N08O24WA (6 & 8 class) E4V2N17O24WA (10 up to 17 class)			
E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)							
E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)	E2M2V207A6 (1 up to 35 class) E2M2V210A6 (8 & 10 class)			E2M2V207A6 (4 up to 8 class) E2M2V210A6 (10 up to 17 class)	E2M2V207A6 (4 up to 8 class) E2M2V210A6 (10 up to 17 class)			
E2M2V207A6	E2M2V207A6			E2M2V207A6	E2M2V207A6			
				E2M2V207A6 + E2M2V207A6 (4 up to 8 class) E2M2V210A6 + E2M2V207A6 (10 up to 17 class)	E2M2V207A6 + E2M2V207A6 (4 up to 8 class) E2M2V210A6 + E2M2V207A6 (10 up to 17 class)			

## Options & accessories - Fan coil units: Filters and Valves

INDOOR UNITS		FWC-BT/BF	FWF-BT/BF	FWH-A	FWI-A	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF	FWL-DAT/DAF
Proportional valves	3-ways proportional valve kit (2-pipe)			E2C3PV02A (2 up to 4 class) E2C3PV06A (6 up to 8 class)	E2C3PV02A (2 up to 4 class) E2C3PV06A (6 up to 8 class)	E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)	E2MPV03A6 (1 up to 35 class) E2MPV06A6 (4 & 6 class) E2MPV10A6 (8 & 10 class)	E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)	E2MPV03A6 (1 up to 35 class) E2MPV06A6 (4 & 6 class) E2MPV10A6 (8 & 10 class)
	3-ways proportional valve kit (additional heat exchanger)								
	2-ways proportional valve kit (2-pipe)			E2C2PV02A (2 up to 4 class) E2C2PV06A (6 up to 8 class)	E2C2PV02A (2 up to 4 class) E2C2PV06A (6 up to 8 class)				
	3-ways proportional valve kit (4-pipe)			E4C3PV02A (2 up to 4 class) E4C3PV06A (6 up to 8 class)	E4C3PV02A (2 up to 4 class) E4C3PV06A (6 up to 8 class)	E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)	E4MPV03A6 (1 up to 35 class) E4MPV06A6 (4 & 6 class) E4MPV10A6 (8 & 10 class)	E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)	E4MPV03A6 (1 up to 35 class) E4MPV06A6 (4 & 6 class) E4MPV10A6 (8 & 10 class)
	2-ways proportional valve kit (cooling heat exchanger)					E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)	E2MPV207A6 (1 up to 6 class) E2MPV210A6 (8 & 10 class)	E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)	E2MPV207A6 (1 up to 6 class) E2MPV210A6 (8 & 10 class)
	2-ways proportional valve kit (additional heat exchanger)					E2MPV207A6	E2MPV207A6	E2MPV207A6	E2MPV207A6
	2-ways proportional valve kit (4-pipe)			E4C2PV02A (2 up to 4 class) E4C2PV06A (6 up to 8 class)	E4C2PV02A (2 up to 4 class) E4C2PV06A (6 up to 8 class)				
Pressure independent controlled valves	Pressure independent controlled valves (2-pipe) 2-way ON-OFF 230V			E2C2PICV02A (2 up to 4 class) E2C2PICV06A (6 up to 8 class)	E2C2PICV02A (2 up to 4 class) E2C2PICV06A (6 up to 8 class)				
	Pressure independent controlled valves (4-pipe) 2-way ON-OFF 230V			E4C2PICV02A (2 up to 4 class) E4C2PICV06A (6 up to 8 class)	E4C2PICV02A (2 up to 4 class) E4C2PICV06A (6 up to 8 class)				
	Pressure independent controlled valves (2-pipe) 2-way proportional 24V			E2C2PRPICV02A (2 up to 4 class) E2C2PRPICV06A (6 up to 8 class)	E2C2PRPICV02A (2 up to 4 class) E2C2PRPICV06A (6 up to 8 class)				
	Pressure independent controlled valves (4-pipe) 2-way proportional 24V			E4C2PRPICV02A (2 up to 4 class) E4C2PRPICV06A (6 up to 8 class)	E4C2PRPICV02A (2 up to 4 class) E4C2PRPICV06A (6 up to 8 class)				



Options & accessories - Fan coil units: Filters and Valves

FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-CT/CF	FWP-CT/CF	FWB-CT/CF	FWD-AT/AF	FWN-AT/AF	FWT-GT
E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)	E2MPV03A6 (1 up to 35 class) E2MPV06A6 (4 & 6 class) E2MPV10A6 (8 & 10 class)	E4V2PN04V3DA (3 up to 5 class) E4V2PN06V3DA (6 up to 8 class) E4V2PN10V3DA (10 & 11 class)		E4V2N05P24WA (4 & 5 class) E4V2N08P24WA (6 & 8 class) E2MPV10A6 (10 up to 17 class)	E4V2N05P24WA (4 & 5 class) E4V2N08P24WA (6 & 8 class) E2MPV10A6 (10 up to 17 class)			
				E4VHN08P24WA (4 up to 8 class) E4VHN17P24WA (10 up to 17 class)	E4VHN08P24WA (4 up to 8 class) E4VHN17P24WA (10 up to 17 class)			
E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)	E4MPV03A6 (1 up to 35 class) E4MPV06A6 (4 & 6 class) E4MPV10A6 (8 & 10 class)	E4V4PN04V3DA (3 up to 5 class) E4V4PN06V3DA (6 up to 8 class) E4V4PN10V3DA (10 & 11 class)		E4V2N05P24WA + E4VHN08P24WA (4 & 5 class) E4V2N08P24WA + E4VHN08P24WA (6 & 8 class) E2MPV10A6 + E4VHN17P24WA (10 up to 17 class)	E4V2N05P24WA + E4VHN08P24WA (4 & 5 class) E4V2N08P24WA + E4VHN08P24WA (6 & 8 class) E2MPV10A6 + E4VHN17P24WA (10 up to 17 class)			
E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)	E2MPV207A6 (1 up to 6 class) E2MPV210A6 (8 & 10 class)			E2MPV207A6 (4 up to 8 class) E2MPV210A6 (10 up to 17 class)	E2MPV207A6 (4 up to 8 class) E2MPV210A6 (10 up to 17 class)			
E2MPV207A6	E2MPV207A6			E2MPV207A6	E2MPV207A6			
				E2MPV207A6 + E2MPV207A6 (4 up to 8 class) E2MPV210A6 + E2MPV207A6 (10 up to 17 class)	E2MPV207A6 + E2MPV207A6 (4 up to 8 class) E2MPV210A6 + E2MPV207A6 (10 up to 17 class)			
				FWBPVVIC2V15 (4 & 6 class) FWBPVVIC2V20 (8 & 10 class) FWBPVVIC2V25 (11 up to 17 class)	FWBPVVIC2V15 (4 & 6 class) FWBPVVIC2V20 (8 & 10 class) FWBPVVIC2V25 (11 up to 17 class)			
				FWBPVVIC2V1515LF (4 & 5 class) FWBPVVIC2V1515 (6 class) FWBPVVIC2V2015 (8 & 10 class) FWBPVVIC2V2515 (11 up to 17 class)	FWBPVVIC2V1515LF (4 & 5 class) FWBPVVIC2V1515 (6 class) FWBPVVIC2V2015 (8 & 10 class) FWBPVVIC2V2515 (11 up to 17 class)			

## Options & accessories - Fan coil units: Others

INDOOR UNITS		FWC-BT/BF	FWF-BT/BF	FWH-A	FWI-A	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF	FWL-DAT/DAF
Adapters	Installation box/Mounting plate for adapter PCBs (when there is no space in the switchbox)	KRP1H98A	KRP1BB101						
	Wiring adapter for electrical appendices	KRP2A52 (2) KRP4AA53 (2)	KRP2A52 (2) KRP4AA53 (2)						
	Remote ON/OFF		EKROROA						
	Remote sensor	KRCS01-4	KRCS01-1						
	Optional PCB for MODBUS connection	EKFCMBCB	EKFCMBCB						
	Wiring adapter with 4 output signals for valve control PCB	EKRP1C11	EKRP1C11						
	Temperature sensor kit					FWTSKA	FWTSKA	FWTSKA	FWTSKA
	Relative humidity sensor kit					FWHSKA	FWHSKA	FWHSKA	FWHSKA
	Fan stop thermostat						YFSTA6		YFSTA6
	Master-slave interface						EPIMSA6		EPIMSA6
Power interface									
Others	Fresh air intake kit (direct installation type)		KDDQ44XA60						
	Fresh air intake					EFA02A6 (2 class) EFA03A6 (3 class) EFA06A6 (6 class) EFA10A6 (8 class)	EFA02A6 (1, 15 & 2 class) EFA03A6 (25 & 3 class) EFA06A6 (35, 4 & 6 class) EFA10A6 (8 & 10 class)		
	Electrical box with earth terminal (2 blocks)	KJB212A	KJB212A						
	Electrical box with earth terminal (3 blocks)	KJB311A	KJB311A						
	Electrical box with earth terminal	KJB411A	KJB411A						
	Electric heater (standard)					EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)	EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)	EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)	EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)
	Electric heater (big)								
	Additional heat exchanger					ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)	ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)	ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)	ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)
	Supporting feet					ESFV06A6 (2, 3 & 6 class) ESFV10A6 (8 class)	ESFV06A6 (1 up to 6 class) ESFV10A6 (8 & 10 class)	ESFV06A6 (2, 3 and 6 class) ESFV10A6 (8 class)	ESFV06A6 (1 up to 6 class) ESFV10A6 (8 & 10 class)
	Supporting feet and grille					ESFVG02A6 (2 class) ESFVG03A6 (3 class) ESFVG06A6 (6 class) ESFVG10A6 (8 class)	ESFVG02A6 (1, 15 & 2 class) ESFVG03A6 (25 & 3 class) ESFVG06A6 (35, 4 & 6 class) ESFVG10A6 (8 & 10 class)		
	Spigot for introduction of mixed renewal air			SPFA11A	SPFA11A				
	Plenum box with circular connections			PPAI02A (2 up to 4 class) PPAI06A (6 up to 8 class)	PPAI02A (2 up to 4 class) PPAI06A (6 up to 8 class)				
	Plenum box (not insulated insulated) with circular connections (supply side)								
	Plenum box (insulated) with circular connections (supply side)								
	G4 Filter								
Vertical auxiliary drain pan						EDPVB6	EDPVB6	EDPVB6	
Horizontal auxiliary drain pan						EDPHB6	EDPHB6	EDPHB6	
Drain pump	included	included				CDRP1A	CDRP1A	CDRP1A (only vertical installation)	
Vertical installation kit (Wall Mounted)								CDRP1A (only vertical installation)	

2. Requires KRP1H98





# Table of content

# Control Systems

## Application overview 174

Individual control systems	176
<b>NEW</b> Onecta App	176
Madoka wired remote controller	180
Wired / infrared remote controllers	182
Centralised control systems	190
Centralised remote controller /	
Unified ON/OFF controller	190
Intelligent Touch Controller	191
Intelligent Tablet Controller	192
Intelligent Touch Manager	194
Intelligent Chiller Manager	198
Standard protocol interfaces	204
Modbus interface	204
KNX Interface	208
PMS Interface for hotels	209
BACnet Interface	210
LonWorks Interface	211
Daikin Cloud Service	212
Daikin on Site	214
Indoor Environmental Sensor	216
Daikin Configurator Software	220
EKPCAB4	220
Other devices	221
Wireless room temperature sensor	221
Wired room temperature sensor	221
Other integration devices	222
Options & Accessories	223

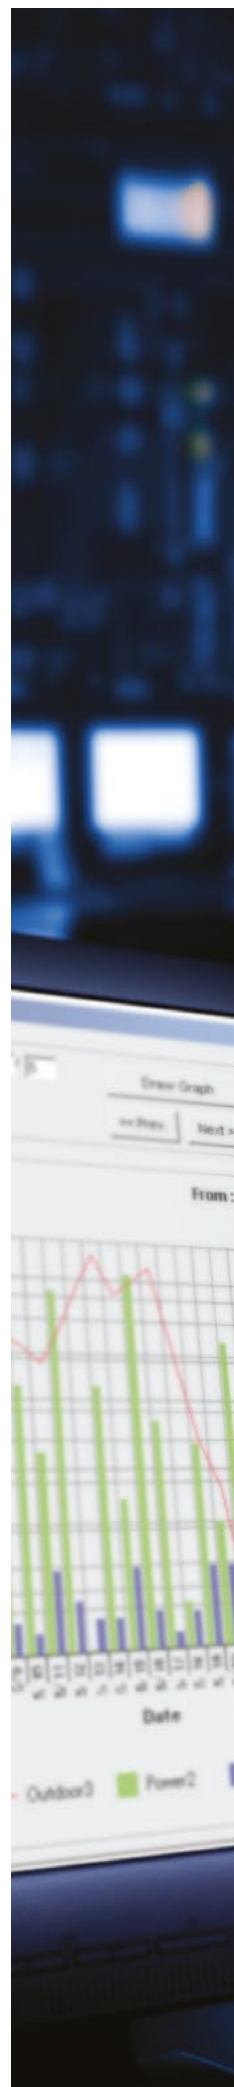

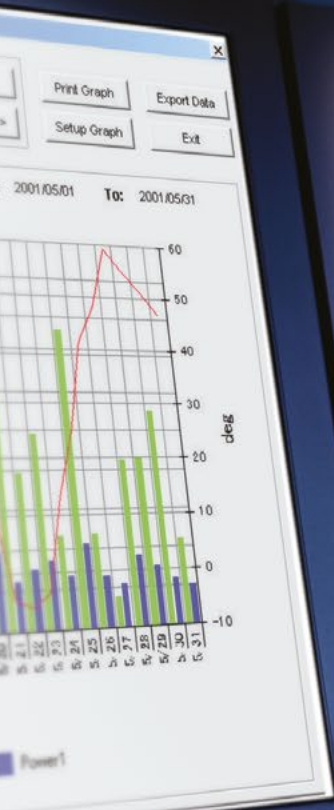

Outdoor Information Panel 1.0.1 - Central V.I.S. - Project

Indoor Units    Outdoor Units    Pipes

Outdoor unit selection

System Name: Out 1

Model: DMC224A11    PS: 400 Stage    Outdoor unit: Out 1 [DMC224A11] - 80%  
Ind 1 [DMC224A11] - 80%  
Ind 2 [DMC224A11] - 80%  
Ind 3 [DMC224A11] - 80%  
Ind 4 [DMC224A11] - 80%

Design conditions: Heating: 12.0°C, Heat load: 26.0kW, Cooling: 12.0°C, Cool load: 26.0kW


Available capacities: Heating: 37.0kW, PE heating: 15.4kW, Cooling: 40.0kW

Piping: Equivalent piping length: 118.0 (0), First branch to indoor units: 22.0 (0)

Position of outdoor unit relative to indoor units: Higher, Same level, Lower

The outdoor unit is on the same level as the indoor units

All defined outdoor units and indoor units

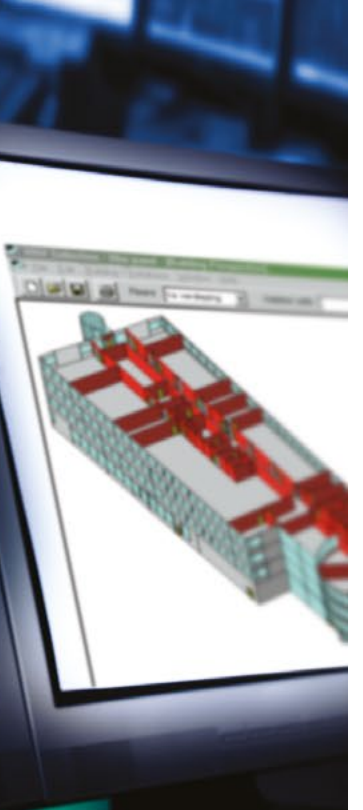


# Control solutions summary

Daikin offers various control solution adapted to the requirements of even the most demanding commercial application.

- > Basic control solutions for those customers with few requirements and limited budget
- > Integrating control solutions for those customers that would like to integrate Daikin units into their existing BMS system
- > Advanced control solutions for those customers that expect Daikin to deliver a mini BMS solution, including advance energy management


## Shop



	Unit control			Integrating control			Advanced control	
	BRP069*	BRC1H52W/S/K	RTD-20	RTD-Net	KLIC-DI	EKMBOXA	DCC601A51	DCM601A51
	Smartphone control for up to 50 indoor units	1 remote controller for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	1 gateway for 1 indoor unit	1 gateway for max. 64 indoor unit(s) (groups) & 10 outdoors	1 unit for 32 indoor unit(s) (5)	1 iTM for 64 indoor unit(s) (groups) (1)
Automatic control of A/C	●	●	●	●	●	●	●	●
Limit control possibilities for shop staff	●	●	●	●	●	●	●	●
Create zones within the shop			●				●	●
Interlock with eg. Alarm, PIR sensor			●				● (limited)	●
Integration into smart home systems	● (7)							
Integrate Daikin units into existing BMS via Modbus				●		●		
Integrate Daikin units into existing BMS via KNX					●			
Integrate Daikin units into existing BMS via HTTP								●
Monitor energy consumption	● (4)	● (4)					● (2)	●
Advanced energy management							● (2)	● (6)
Allows free cooling								●
Voice control	● (6)							
Integrate Daikin products cross pillars into Daikin BMS								●
Integrate third party products into Daikin BMS							●	●
Online control	●						● (2)	● (3)
Manage multiple sites							● (2)	● (3)

(1) 7 iTM plus adapters (DCM601A52) can be added to have 512 indoor groups and 80 outdoor (systems) (2) Via Daikin cloud service (3) Through own IT set-up (not Daikin cloud server) (4) Not available on all indoors (5) Up to 10 DCC601A51 can be combined as a single site on Daikin Cloud Service (6) Only for BRP069C51, connection to Google Assistant and Amazon Alexa; (7) only for BRP069C51, contact your local sales representative for an overview of available services.

## Hotel



	Unit control	Integrating control		Advanced control	
	BRC1H52W/S/K	RTD-HO	KLIC-DI	DCM010A51	DCM601A51
	1 remote controller for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	1 gateway for 1 indoor unit	1 interface for up to 2,500 indoor units	1 iTM for 64 indoor unit(s) (groups) (1)
Hotel guest can control & monitor basic functionalities from his room	●	●	● (3)		●
Limit control possibilities for hotel guests	●	●	●	●	●
Interlock with window contact	● (2)	●			●
Interlock with key-card	● (2)	●			●
Integrate Daikin units into existing BMS via Modbus		●			
Integrate Daikin units into existing BMS via KNX			●		
Integrate Daikin units into existing BMS via HTTP					●
Integrate Daikin unit control in hotel booking software				● Oracle Opera PMS	
Monitor energy consumption					●
Advanced energy management					●
Integrate Daikin products cross pillars into Daikin BMS					●
Integrate third party products into Daikin BMS					●
Online control					●

(1) 7 iTM plus adapters (DCM601A52) can be added to have 512 indoor groups and 80 outdoor (systems) (2) Via BRP7A51 adapter (3) requires KNX compatible controller

Office



	Unit control	Integrating control		Advanced control		
	BRC1H52W/S/K	EKMBDXB	DMS504B51	DMS502A51	DCC601A51	DCM601A51
	1 remote controller for 1 indoor unit (group)	1 gateway for max. 64 indoor unit(s) (groups) & 10 outdoors	1 gateway for 64 indoor unit(s) (groups)	1 gateway for 128 indoor unit(s) (groups), 20 outdoors (2)	1 unit for 32 indoor unit(s) (groups) (5)	1 iTM for 64 indoor unit(s) (groups) (1)
Automatic control of A/C	●	●	●	●	●	●
Centralised control for management		●	●	●	●	●
Local control for office staff	●				● (4)	● through Web Remote management
Limit control possibilities for office staff	●	●	●	●	●	●
Integrate Daikin units into existing BMS via Modbus		●				
Integrate Daikin units into existing BMS via HTTP						●
Integrate Daikin units into existing BMS via LonTalk			●			
Integrate Daikin units into existing BMS via BACnet				●		
Energy consumption read out	● (3)					
Monitor energy consumption					● (4)	●
Advanced energy management					● (4)	●
PPD software to distribute used kWh/indoor unit				● (6)		● (7)
Integrate Daikin cross pillar products into Daikin BMS						●
Integrate third party products into Daikin BMS					●	●
Online control					● (4)	●
Manage multiple sites					● (4)	● (5)

(1) 7 iTM plus adapters (DCM601A52) can be added to have 512 indoor groups and 80 outdoor (systems) (2) extension (DAM411B51) needed to have up to 256 indoor unit(s) (groups), 40 outdoors (3) Not available on all indoor units (4) Via Daikin cloud service (5) Through own IT set-up (not Daikin cloud sever) (5) Up to 10 DCC601A51 can be combined as a single site on Daikin Cloud Service (6) via DAM412B51 option (7) via DCM002A51 option

Infrastructure cooling



	Unit	Integrating	Advanced
	BRC1H52W/S/K	RTD-10	DCM601A51
	1 remote controller for 1 indoor unit (group) (2)	1 gateway for 1 indoor unit (group) Up to 8 gateways can be linked together	1 iTM for 64 indoor unit(s) (groups) (1)
Automatic control of A/C	●	●	●
Back-up operation	●	●	●
Duty rotation	●	●	●
Limit control possibilities in the technical cooling room	●	●	●
If room temperature above max., then show alarm & start standby unit.		●	●
If an error occurs, an alarm will be shown.	●	●	●
If an error occurs, activate an alarm output	Via KRP2/4A option (3)	●	Via WAGO I/O


(1) 7 iTM plus adapters (DCM601A52) can be added to have 512 indoor groups and 80 outdoor (systems) (2) Infrastructure cooling functions only compatible with indoor units connected to RZQG\*/RZAG\* outdoor units. (3) See option list of indoor unit

# Onecta App

Now available with voice control



The Onecta App is for those who live their life on the go and who want to manage their heating and cooling system from their smartphone.

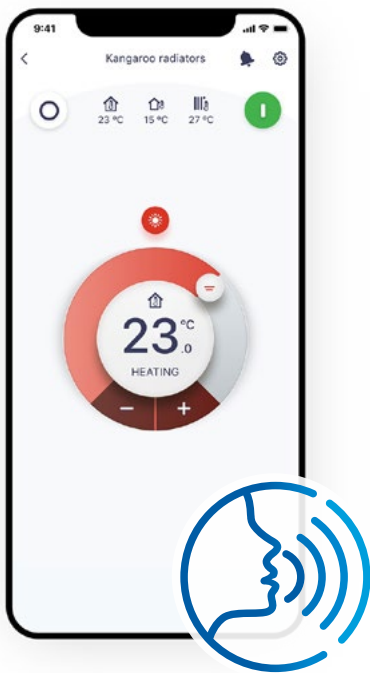


# onecta

NEW


## Voice control

To provide users with even more comfort and ease, the Onecta App now offers voice control. This hands-free feature cuts down on clicks to manage units faster than ever before.

Cross-functional and multilingual, voice control pairs well with any smart device, including Google Assistant and Amazon Alexa.


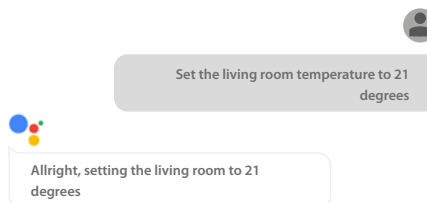


Example of using the voice control via Google Assistant

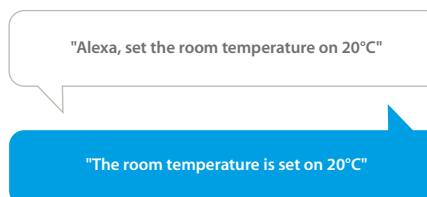

Example of using the voice control via Amazon Alexa




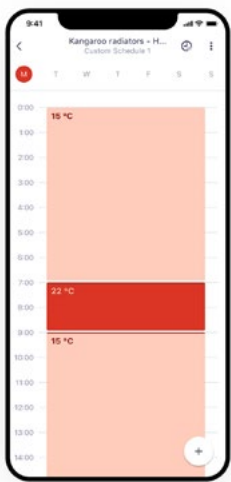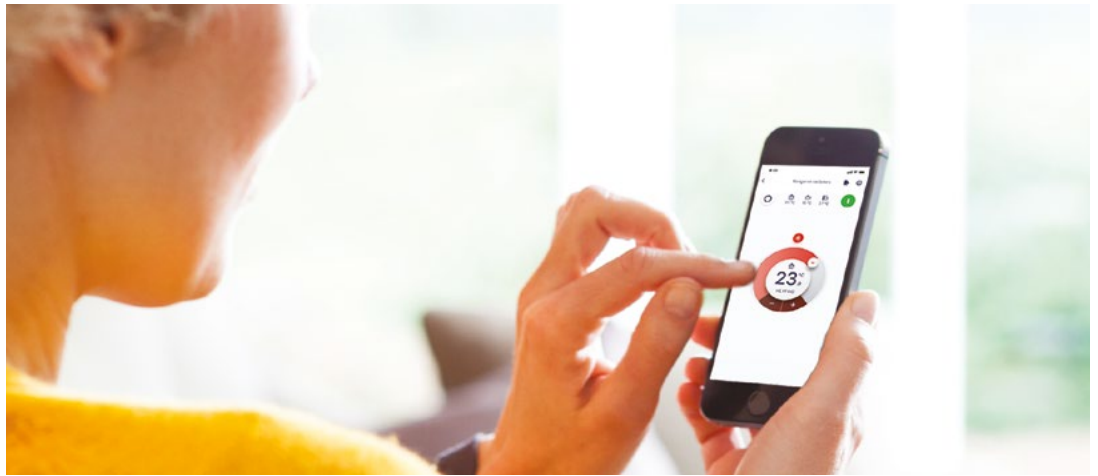

## Schedule

Set up a programme outlining when the system should operate, and create up to six actions per day.

- Schedule room temperature and operation mode
- Enable holiday mode to save costs

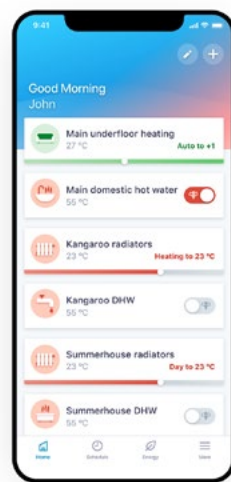

## Control

Customise the system to fit your lifestyle and year-round comfort levels.

- Change room and domestic hot water temperature
- Turn on powerful mode to boost hot water production



## Monitor

Receive a thorough overview of how the system is performing and how much energy it consumes.

- Check the status of the heating system
- Access energy consumption graphs (day, week, month)

Function availability depends on the system type, configuration and operation mode. The app functionality is only available if both the Daikin system and the app have a reliable internet connection.



Scan the QR code to download the app now



## Individual control systems

### Onecta connectable units

#### Integrated in unit

- › FTXA-AW/BS/BT/BB
- › C/FTXM-R
- › FVXM-A
- › FTXTA-BW/BB
- › FTXTM-R
- › ATXM-R

#### BRP069B41

- › FTXJ-MW/S \*

#### BRP069B42

- › FTXZ-N
- › FVXM-F

#### BRP069B45

- › FTXP-M9
- › ATXP-M
- › FTXF-D
- › FTXTM-M\*
- › ATXTM-M\*
- › FTXC-C
- › ATXC-C

#### BRC069C81 \*\*

- Ceiling mounted**
- › FFA-A9
- Concealed ceiling**
- › FDXM-F9
- › FBA-A(9)
- › FDA125A
- › ADEA-A
- Wall mounted**
- › FAA-B
- Ceiling suspended**
- › FHA-A(9)
- › FUA-A
- Floor standing**
- › FVA-A
- › FNA-A9

#### BRC069C82 \*\*

- Ceiling mounted**
- › FCAHG-H
- › FCAG-B
- › FDA200-250A

#### BRP069C51 \*\*\*

- VRV 5 indoor units**
- › FXFA-A
- › FXZA-A
- › FXDA-A
- › FXSA-A
- › FXMA-A
- › FXHA-A
- › FXUA-A
- › FXAA-A

\* adapter included with the unit

\*\* Wired remote controller must be connected to the indoor unit to operate online controller

\*\*\* Must be combined with BRC1H52W/S/K

### Onecta app connectable units:



			Connectivity				
			BRP069A71	BRP069A78	BRP069A61/62	DRGATEWAYAA	EHS157056 (RoCon G1)
Daikin Altherma 3 H HT (F/W)	14-16-18 kW	EPRA14-18D + ETV/B*-E	•	• (1)			
Daikin Altherma 3 H HT ECH2O	14-16-18 kW	EPRA14-18E + ETS*-D					•
Daikin Altherma 3 H MT (F/W)	8-10-12 kW	EPRA08-12E + ETV/B*-E	•	• (1)			
Daikin Altherma 3 H MT (ECH2O)	8-10-12 kW	EPRA08-12E + ETS*-E	•	• (1)			
Daikin Altherma 3 R (F/W)	4-6-8kW	ERGA-E + EHV/B*-E	•	• (1)			
Daikin Altherma 3 R ECH2O	4-6-8kW	ERGA-E + EHS*-D3					•
Daikin Altherma 3 R (F/W)	11-14-16 kW	ERLA-D + EBV/B*-D	•	•			
Daikin Altherma 3 R ECH2O	11-14-16 kW	ERLA-D + EBS*-D	•	•			
Daikin Altherma 3 H (F/W)	11-14-16 kW	EPGA-D + EAV/B*-D			•		
Daikin Altherma R (F/W)	11-14-16 kW	ER(H/L)Q-C + EHV/B*-B			•		
Daikin Altherma R ECH2O	11-14-16 kW	ER(H/L)Q-C + EHS*-B					•
Daikin Altherma 3 M	11-14-16 kW	E(B/D)LA-D		•			
Daikin Altherma M	5-7 kW	EBLQ-CV3			•		
Daikin Altherma R Hybrid	5-8 kW	EVLQ-CV3			•		
Daikin Altherma H Hybrid	4 kW	EJHA-AV3			•		
Daikin Altherma GEO	10 kW	EGSQH-A9W			•		
Daikin Altherma 3 GEO	6-10 kW	EGSA(H/X)-D9W			• (2)		
Daikin Altherma 3 C Gas W	12-35 kW	D2CND-A1A/A4A				•	
Daikin Altherma C Gas ECH2O	15-28 kW	D2UGB/GC-A					•

(1) Included in accessory bag.

(2) Equivalent of BRP069A61 built in.

Wireless LAN Connecting Adaptor BRP069 meets all of the following:

A. Generally available to the public by being sold, without restriction, from stock at retail selling points by means of any of the following: 1. Over-the-counter transactions; 2. Mail order transactions; 3. Electronic transactions; or 4. Telephone call transactions;

B. The cryptographic functionality cannot easily be changed by the user;

C. Designed for installation by the user without further substantial support by the supplier.



## Madoka wired remote controller

# Madoka

# The beauty of simplicity.



Silver  
RAL 9006 (metallic)  
BRC1H52S



Black  
RAL 9005 (matte)  
BRC1H52K



White  
RAL9003 (glossy)  
BRC1H52W

## User-friendly wired remote controller with premium design

Madoka combines refinement and simplicity

- › Sleek and elegant design
- › Intuitive touch-button control
- › Three display options: standard, detailed and **new symbolic view**
- › Three colours to match any interior
- › Compact, measures only 85 x 85 mm
- › Advanced settings **copy function** and commissioning via smartphone



reddot award 2018  
winner





# Madoka Assistant



GET IT ON  
Google Play




Available on the  
App Store


Simplifies the advanced settings such as schedule or set point limitation

- Visual interface simplifies advanced settings such as schedule setting, energy saving activation, setting restrictions, etc.
- Save field settings and schedules on your phone and upload to multiple controllers, saving time and cost
- Easy and quick commissioning
- Featuring Bluetooth® low energy technology

Easy setting of schedules

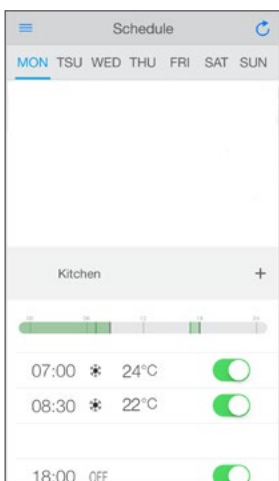


Advanced user settings

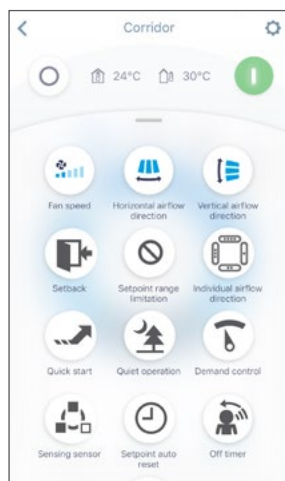


**NEW**

Bluetooth strength indication

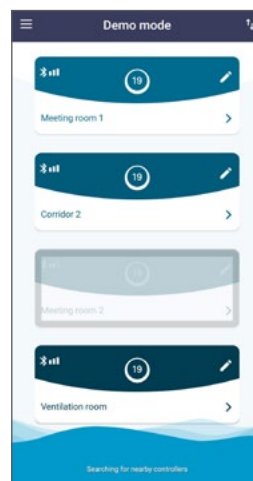

Field settings

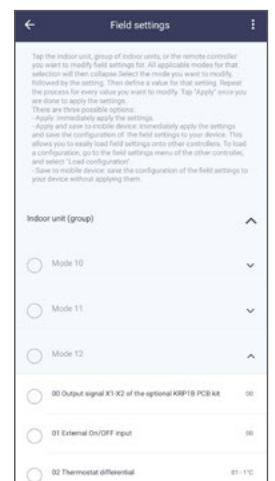

BRC1H519W7 / BRC1H519S7 / BRC1H519K7

## Madoka wired remote controller for Sky Air and VRV



BRC1H52W



BRC1H52S



BRC1H52K


### A complete redesigned controller focussed to enhance user experience

- › Sleek and elegant design
- › Intuitive touch-button control
- › Three display options: standard, detailed and **new symbolic view**
- › Direct access to basic functions (on/off, set point, mode, target values, fan speed, louvres, filter icon & reset, error & code)
- › Three colours to match any interior
- › Compact, measures only 85 x 85 mm
- › Real time clock with auto update to daylight saving time

### Hotel application features

- › Energy saving through key card, window contact integration and set point limitation (BRP7A\*)
- › Flexible setback function ensures room temperature remains within comfortable limits to ensure guest comfort

### Key card and window contact integration

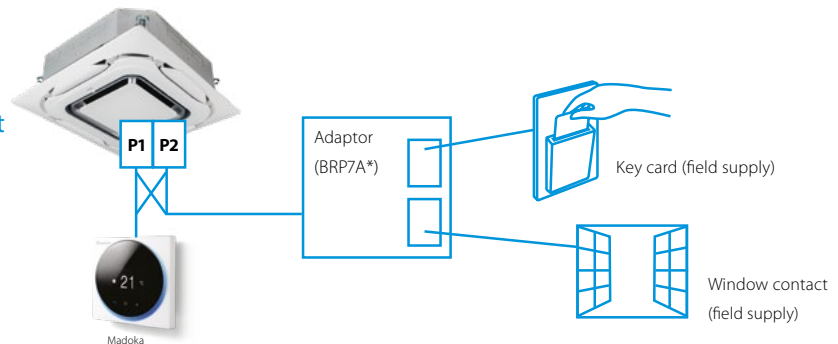

### Madoka Assistant: Advanced settings can be easily done via your smartphone

#### A range of energy-saving functions that can be selected individually


- › Temperature range restriction: Save on energy by setting the low temperature limit in cooling mode and the high temperature limit in heating mode (1)
- › Setback function
- › Adjustable presence detector and floor sensor (available on the Round Flow and Fully Flat Cassettes)
- › Automatic temperature reset
- › Auto off timer

#### Kilowatt-hour consumption tracking (2)

The kWh indicator displays indicative power consumption for the last day/month/year.

#### Other functions

- › **NEW** Three user access levels: Basic user, Advanced and Installer to match user requirements and prevent improper use.
- › Save field settings and schedules on your phone and upload to multiple controllers, saving time and cost
- › **NEW** Mark frequently used menu's as favourites for direct access
- › Up to three independent schedules can be programmed, allowing you to switch easily between them throughout the year (e.g. summer/winter/mid-season)
- › Menu settings can be individually locked or restricted
- › The outdoor unit can be set to quiet mode and power consumption limit control by schedule (3)
- › Real-time clock that updates automatically for daylight saving

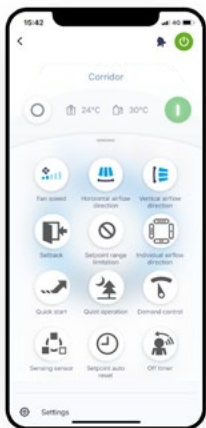

### Cost-effective solution for infrastructure cooling applications

- › Only in combination with RZAG\* / RZQG\*
- › Duty rotation

After a certain period of time, the operating unit will go into standby and the standby unit will take over, extending the system lifetime. Rotation interval can be set for 6, 12, 24, 72 or 96 hours, as well as weekly.

- › Back-up operation: if one unit fails, the other unit will start automatically

(1) Also available in auto cooling/heating changeover mode  
 (2) For Sky Air FBA, FCAG and FCAHG pair combinations only

(3) Only available on RZAG\*, RZASG\*, RZQG\*, RZQSG\*

BRC1HHDW / BRC1HHDS / BRC1HHDK

## Madoka wired remote controller for Daikin Altherma 3 heat pumps

A new generation of user interface, redesigned and intuitive



BRC1HHDW



BRC1HHDS



BRC1HHDK



### Intuitive control with a premium design:

The smooth curves of the Madoka controller offer a sleek, refined shape which is distinguished by its striking blue circular display. Presenting a clear visual reference with large easy to read numbers, the controller features are accessed through three touch buttons, which combine intuitive control with easy adjustability for an enhanced user experience.

### Three colours to match any interior design:

No matter your interior design, Madoka will match it. Silver gives an additional touch to stand out in any interior or application, while Black is an ideal match for darker, stylish interiors. White offers a sleek, modern look.

### Easily set operation parameters:

Setting and finetuning your controller is simple and helps you attain higher energy savings and more comfort. The system enables you to select the space operation mode (heating, cooling or automatic), set the desired room temperature and control the domestic hot water temperature.

### Easy Update via Bluetooth:

It is strongly recommended that the user interface has the latest software version. To update the software or check if updates are available, you need a mobile device and the Madoka Assistant app. This app is available from Google Play and the Apple Store.



[www.daikin.eu/madoka](http://www.daikin.eu/madoka)

EKRUCB\*

# Wired remote control for Heating

### Control

- › Manage space heating, cooling, domestic hot water and among others, booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct accessibility to all main functions

### Comfort

- › An additional user interface can include a room thermostat in the space to be heated
- › Easy commissioning; intuitive interface for advanced menu settings


\* only in combination with EKRTETS

### General features

Several languages possible depending on the model, including: English, German, Dutch, Spanish, Italian, French, Greek, Russian, etc.

### Applicable Daikin units

- › Daikin Altherma R (F/W)
  - Daikin Altherma M
- › Daikin Altherma R Hybrid
- › Daikin Altherma GEO
- › Domestic hot water heat pump

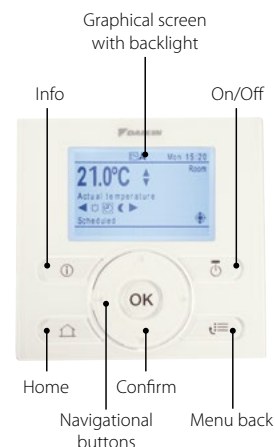

EKRUAHTB

# System controller for Daikin Altherma

### Control

#### Reduce installation time

- › Program all settings for an installation on a laptop computer and simply upload them to the controller during commissioning
- › Reuse similar settings for related installations

#### Improve service diagnostics and maintenance

- › The controller records the time, date and nature of the last 20 error occurrences

### Comfort

#### Maximise comfort with stable room temperatures

- › Raise or lower water temperature as a function of the actual room temperature
- › Manage energy consumption
- › Intuitive screen displays the output and input energy of the unit provide consumption transparency

### General features

#### Weather depending floating set point

When the floating set point function is enabled, the set point for the leaving water temperature will be dependent on the outside ambient air temperature. At low outside ambient air temperatures, the leaving water temperature will increase to satisfy the rising heat requirement of the building. At warmer temperatures, the leaving water temperature will decrease to save energy.



### Applicable Daikin units

- › Daikin Altherma R HT
- › Daikin Altherma R Flex Type HT


## Applicable Daikin units



			BRC1HHDW/S/K	EKRUCB*	EKRUHML*	EKRUAHTB	EHS157034	DOTROOMTHEAA
Daikin Altherma 3 H HT (F/W)	14-16-18 kW	EPRA14-18D + ETV/B*-E	•					
Daikin Altherma 3 H HT ECH2O	14-16-18 kW	EPRA14-18E + ETS*-D					•	
Daikin Altherma 3 H MT (F/W)	8-10-12 kW	EPRA08-12E + ETV/B*-E	•					
Daikin Altherma 3 H MT (ECH2O)	8-10-12 kW	EPRA08-12E + ETS*-E	•					
Daikin Altherma 3 R (F/W)	4-6-8kW	ERGA-E + EHV/B*-E	•					
Daikin Altherma 3 R ECH2O	4-6-8kW	ERGA-E + EHS*-D3					•	
Daikin Altherma 3 R (F/W)	11-14-16 kW	ERLA-D + EBV/B*-D	•					
Daikin Altherma 3 R ECH2O	11-14-16 kW	ERLA-D + EBS*-D	•					
Daikin Altherma 3 H (F/W)	11-14-16 kW	EPGA-D + EAV/B*-D	•					
Daikin Altherma R (F/W)	11-14-16 kW	ER(H/L)Q-C + EHV/B*-B		•				
Daikin Altherma R ECH2O	11-14-16 kW	ER(H/L)Q-C + EHS*-B					•	
Daikin Altherma R HT	11-14-16 kW	EKHBRD-ADV/Y17 + ER(R/S)Q-AV/Y1				•		
Daikin Altherma 3 M	11-14-16 kW	E(B/D)LA-D	•					
Daikin Altherma M	5-7 kW	EBLQ-CV3		•				
Daikin Altherma R Hybrid	5-8 kW	EVLQ-CV3		•				
Daikin Altherma H Hybrid	4 kW	EJHA-AV3			•			
Daikin Altherma 3 GEO	6-10 kW	EGSA(H/X)-D9W	•					
Daikin Altherma GEO	10 kW	EGSQH-A9W		•				
Daikin Altherma 3 C Gas W	12-35 kW	D2CND-A1A/A4A						•
Daikin Altherma C Gas ECH2O	15-28 kW	D2UGB/GC-A					•	



# Individual room control system for temperature adjustment of heating and cooling systems

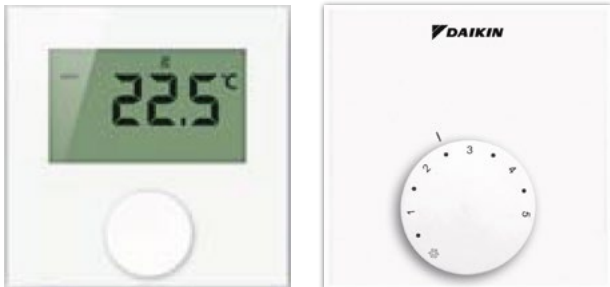

## General features

- › Improve energy efficiency of the home
- › Universally deployable and scalable
- › Easy and intuitive installation, operation and maintenance
- › Cost effective and convenient for the end-user

## Comfort

With the help of an electronic room-by-room control system, users can regulate the temperature individually in each room.

In addition to the warmth output of the actual heating surfaces, the room temperature control system also takes all other heat sources into account, such as sunshine, warmth from lights or people, and other sources of warmth, such as a fireplace or a tiled stove. On the basis of a continuous comparison of the target and current temperatures, the room temperature control system opens and closes the individual heating circuits by way of electrical valve actuators.



### Wired digital thermostat EKWCTRD11V3

The setting of the desired room temperature and the operation, can be performed comfortably via a rotary control with rotary-push action and soft ratchet. The well-structured and language-neutral symbols of the display always clearly indicate all settings.



### Wired analog thermostat EKWCTRAN1V3

An optimum price-performance ratio is offered for rooms where only a very good temperature control is desired, without the comfort function of the display variant.

## System components



### Base station EKWUFHTA1V3

The Daikin Wired Base Station is the central connection unit of a room-by-room temperature control for the surface temperature adjustment of heating and cooling systems.



### Valve actuator EKWCVATR1V3

The Daikin Valve Actuator is a thermoelectric valve drive for opening and closing valves on heating circuit distributors of concealed heating and cooling systems.

## Applicable Daikin units

- › Combinable to all Daikin Altherma units



## BRC1E53A/B/C

## User friendly remote control for Sky Air and VRV



Graphical display of indicative electricity consumption  
(Function available in combination with FBA-A, FCAG and FCAHG)



## A series of energy saving functions that can be individually selected

- › Demand control (1)
- › Temperature range limit
- › Setback function
- › Presence & floor sensor connection (available on round flow and fully flat cassette)
- › kWh indication (2)
- › Set temperature auto reset
- › Off timer

## Cost-effective solution for infrastructure cooling applications

- › Only in combination with Sky Air A-series or Seasonal Smart outdoor unit

## Other functions

- › Up to 3 independent schedules
- › Possibility to individually restrict menu functions
- › Choice of display between symbol or text
- › Real time clock with auto update to daylight saving time
- › Built-in backup power for clock (up to 48 hours). Settings are always kept in case of power loss.
- › Supports multiple languages:  
BRC1E53A: English, German, French, Dutch, Spanish, Italian, Portuguese  
BRC1E53B: English, Czech, Croatian, Hungarian, Romanian, Slovenian, Bulgarian  
BRC1E53C: English, Greek, Russian, Turkish, Polish, Slovak, Albanian

(1) Only available on RZAG\*, RZASG\*, RZQG\*, RZQSG\* | (2) For Sky Air FBA, FCAG and FCAHG pair combinations only

## BRC1D52

## Wired remote control for Sky Air and VRV



BRC1D52

- › Schedule timer: Five day actions can be set
- › Home leave (frost protection): during absence, the indoor temperature can be maintained at a certain level. This function can also switch the unit ON/OFF
- › User friendly HRV function, thanks to the introduction of a button for ventilation mode and fan speed
- › Immediate display of fault location and condition
- › Reduction of maintenance time and costs

## ARC4\*/BRC4\*/BRC7\*

## Infrared remote control



ARC466A1



BRC4\*/BRC7\*

Operation buttons: ON/OFF, timer mode start/stop, timer mode on/off, programme time, temperature setting, air flow direction (1), operating mode, fan speed control, filter sign reset (2), inspection (2)/test indication (2)

Display: Operating mode, battery change, set temperature, air flow direction (1), programmed time, fan speed, inspection/test operation (2)

1. Not applicable for FXDQ, FXSQ, FXNQ, FBDQ, FDXM, FBA
2. For FX\*\* units only
3. For all features of the remote control, refer to the operation manual



# Controls

3 controller versions are available to choose from: Colour, touch or simplified



AZCE6BLUEFACECB (Wired)

### Blueface - main thermostat

- › Intuitive graphical, colour touch screen for controlling multiple zones



AZCE6THINKCB (Wired)  
AZCE6THINKRB (Wireless)

### Think - zone thermostat

- › Graphic touch button with low-energy e-ink screen for controlling single zones



AZCE6LITECB (Wired)  
AZCE6LITERB (Wireless)

### Lite - zone thermostat

- › Simplified thermostat with touch buttons for temperature control

- › Optional bus cable (2 x 0.5 mm<sup>2</sup> | 2 x 0.22 mm<sup>2</sup>), 15 m length: AZX6CABLEBUS15, 100m length: AZX6CABLEBUS100



AZX6WSPHUB

### Webserver for remote control

- › Cloud based remote control of multizoning kit(s)
- › Configuration and control of zones (temperature, operation mode, ...)
- › Access via webportal, or Android/IOS application
- › Supports Ethernet and WIFI
- › AZX6WSPHUB:
  - › For installation on DIN rail
  - › 32 zoning boxes can be controlled
- › AZX6WSC5GER:
  - › For installation in the unit
  - › Controls one zoning box



AZX6WSC5GER



AZX6WSPBAC

### BACnet or KNX gateway

- › Allows ON/OFF control of each zone
- › Control of temperature for each zone
- › Status indication of operation mode
- › One gateway needed per system



AZX6KNXGTWAY

# Grilles and plenums

## Supply air grilles and plenums



RDHV040015BKX

### Wall type supply grille

- › With horizontal and vertical adjustable flaps



RLQV040015BKX

### Ceiling type supply grille

- › With horizontal flaps angled at 15°
- › Vertical flaps can be adjusted manually



PREJ0400150T

### Plenum for supply grille

- › To connect circular ducts to discharge grille
- › Insulated, galvanised steel
- › Diameter 250mm

## Return air grilles and plenums



RRFR050050BTX

### Return air grille with integrated filter

- › Filters particles from the air



BR500

### Plenum for return grille

- › To connect 1 up to 4 circular ducts to the return air grille
- › Diameter 250mm



AZCEZDAPR07\*

### Plenum for return air

- › To connect 1 up to 4 circular ducts to the Daikin concealed ceiling units
- › Diameter 250mm
- › Different sizes (XS, S, M, L, XL) to fit the indoor unit

## Centralised remote controller

Centralised control of the Sky Air and VRV system can be achieved via 2 user friendly compact remote controllers. These controls may be used independently or in combination with:

1 group = several (up to 16) indoor units in combination

1 zone = several groups in combination.

A centralised remote control is ideal for use in tenanted commercial buildings subject to random occupation, enabling indoor units to be classified in groups per tenant (zoning).

### DCS302C51

## Centralised remote control



Providing individual control of 64 groups (zones) of indoor units.

- > a maximum of 64 groups (128 indoor units, max. 10 outdoor units) can be controlled
- > a maximum of 128 groups (128 indoor units, max. 10 outdoor units) can be controlled via 2 centralised remote controls in separate locations
- > zone control
- > group control
- > malfunction code display
- > maximum wiring length of 1,000m (total: 2,000m)
- > air flow direction and air flow rate of HRV can be controlled
- > expanded timer function

### DCS301B51

## Unified ON/OFF control




Providing simultaneous and individual control of 16 groups of indoor units.

- > a maximum of 16 groups (128 indoor units) can be controlled
- > 2 remote controls in separate locations can be used
- > operating status indication (normal operation, alarm)
- > centralised control indication
- > maximum wiring length of 1,000m (total: 2,000m)

## DCS601C51



Detailed & easy monitoring and operation of VRV systems (max. 64 indoor units groups).

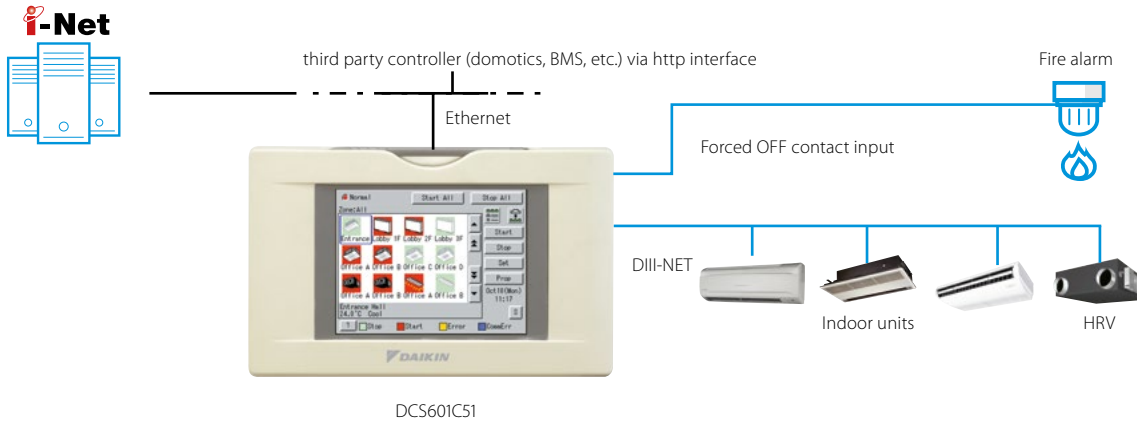**Languages**

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

**System layout**

- › Up to 64 indoor units can be controlled
- › Touch panel (full colour LCD via icon display)

**Control**

- › Individual control (set point, start/stop, fan speed) (max. 64 groups/indoor units)
- › Set back schedule
- › Enhanced scheduling function (8 schedules, 17 patterns)
- › Flexible grouping in zones
- › Yearly schedule
- › Fire emergency stop control
- › Interlocking control
- › Increased HRV monitoring and control function
- › Automatic cooling / heating change-over
- › Heating optimization
- › Temperature limit
- › Password security: 3 levels (general, administration & service)
- › Quick selection and full control
- › Simple navigation

**Monitoring**

- › Visualisation via Graphical User Interface (GUI)
- › Icon colour display change function
- › Indoor units operation mode
- › Indication filter replacement

**Cost performance**

- › Free cooling function
- › Labour saving
- › Easy installation
- › Compact design: limited installation space
- › Overall energy saving

**Open interface**

- › Communication to any third party controller (domotics, BMS, etc.) is possible via open interface (http option DCS007A51)

**Connectable to**

- › VRV
- › HRV
- › Sky Air
- › Split (via interface adapter)

DCC601A51



# Advanced centralised controller with Cloud connection

- Intuitive and user-friendly interface
- Flexible concept for stand alone and multi site applications
- Total solution thanks to integration of 3rd party equipment
- Monitor & control your small commercial building, no matter where you are

2 solutions:


**Local solution**

- › Offline centralised control
- › Stylish optional screen fits any interior

**Cloud solution**

- › Flexible online control from any device (Laptop, tablet...)
- › Monitor & control one or multiple sites
- › Benchmark the energy consumption of different installations (1)
- › Energy consumption follow-up to comply with local regulations

System layout

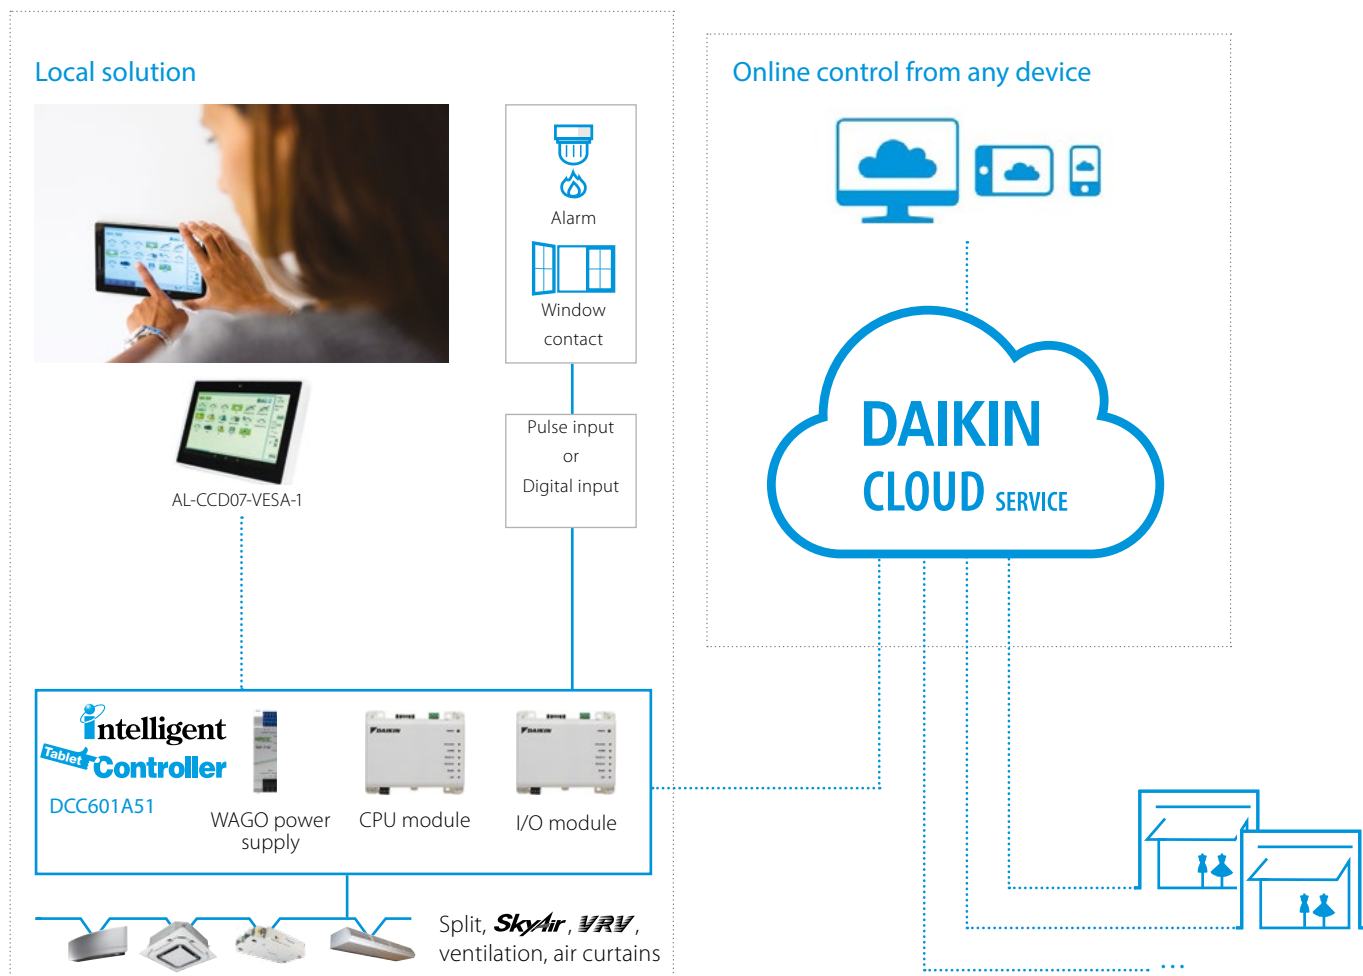

(1) For VRV and Sky Air R-32 ranges the consumption data is integrated; for other (HVAC) systems, field supplied kWh meters will be required



**Total solution**

- › Total solution thanks to a large integration of Daikin products and 3rd party equipment
- › Connect a wide range of units (Split, Sky Air, VRV, Ventilation, Biddle air curtains)
- › Simply control your entire building centrally
- › Increased customer shopping experience by better management of your shop comfort level

**Daikin Cloud Services**

- › Control your building no matter where you are
- › Monitor and control multiple sites
- › Installer or technical manager can remotely login to the cloud for first trouble-shooting
- › Benchmark the energy consumption of different installations (1)
- › Manage & track your energy use




**User friendly touch control**

- › Stylish Daikin supplied optional screen for local control fits any interior
- › Intuitive and user-friendly interface
- › Full solution with simple control
- › Easy commissioning

**Flexible**

- › Pulse/digital inputs for 3rd party equipment such as kWh meters, emergency input, window contact, ...
- › Modular concept allows your cloud to grow with your business
- › Control up to 32 indoor units per controller and 320 units per site

(1) only available in combination with certain indoor units

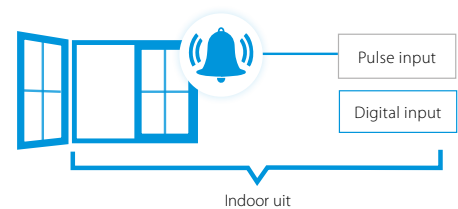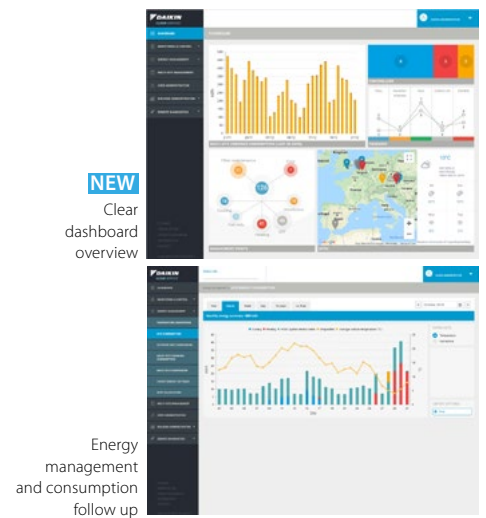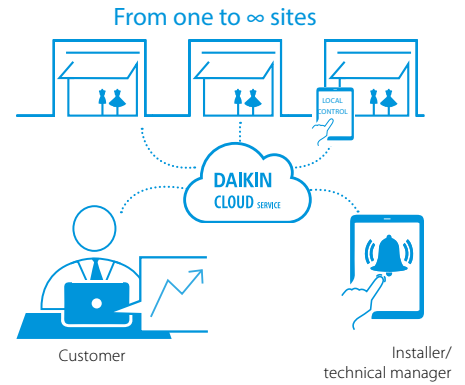

**Functions overview**

		Local solution	Cloud solution
<b>Languages</b>		Depends on local device	EN, DE, FR, NL, ES, IT, EL, PT, RU, TR, DA, SV, NO, FI, CS, HR, HU, PL, RO, SL, BG, SK
<b>System layout</b>	N° of connectable indoor units	32	32
	Multiple sites control		•
<b>Monitoring &amp; control</b>	Basic control functions (ON/OFF, mode, filter sign, setpoint, fan speed, ventilation mode, room temperature, ...)	•	•
	Remote control prohibition	•	•
	All devices ON/OFF	•	•
	Zone control		•
	Group control	•	•
	Weekly schedule	•	•
	Yearly schedule		•
	Interlock control	•	•
	Set point limitation		•
	Visualisation of energy use per operation mode		•
<b>Connectable to</b>	DX split, Sky Air, VRV	•	•
	Modular L Smart, VAM, VKM ventilation	•	•
	Air curtains	•	•

For available Daikin Cloud Service options refer to the option list



# Mini BMS

with full integration  
across all product pillars

DCM601A51



- Price competitive mini BMS
- Cross-pillar integration of Daikin products
- Integration of third party equipment



Download the WAGO  
selection tool from  
[my.daikin.eu](http://my.daikin.eu)


- › Easy selection of WAGO materials
- › Material list creation
- › Time saving
  - Includes wiring schemes
  - Contains commissioning/preset data for iTM



Check on  
**YouTube**

<https://www.youtube.com/DaikinEurope>

# System overview

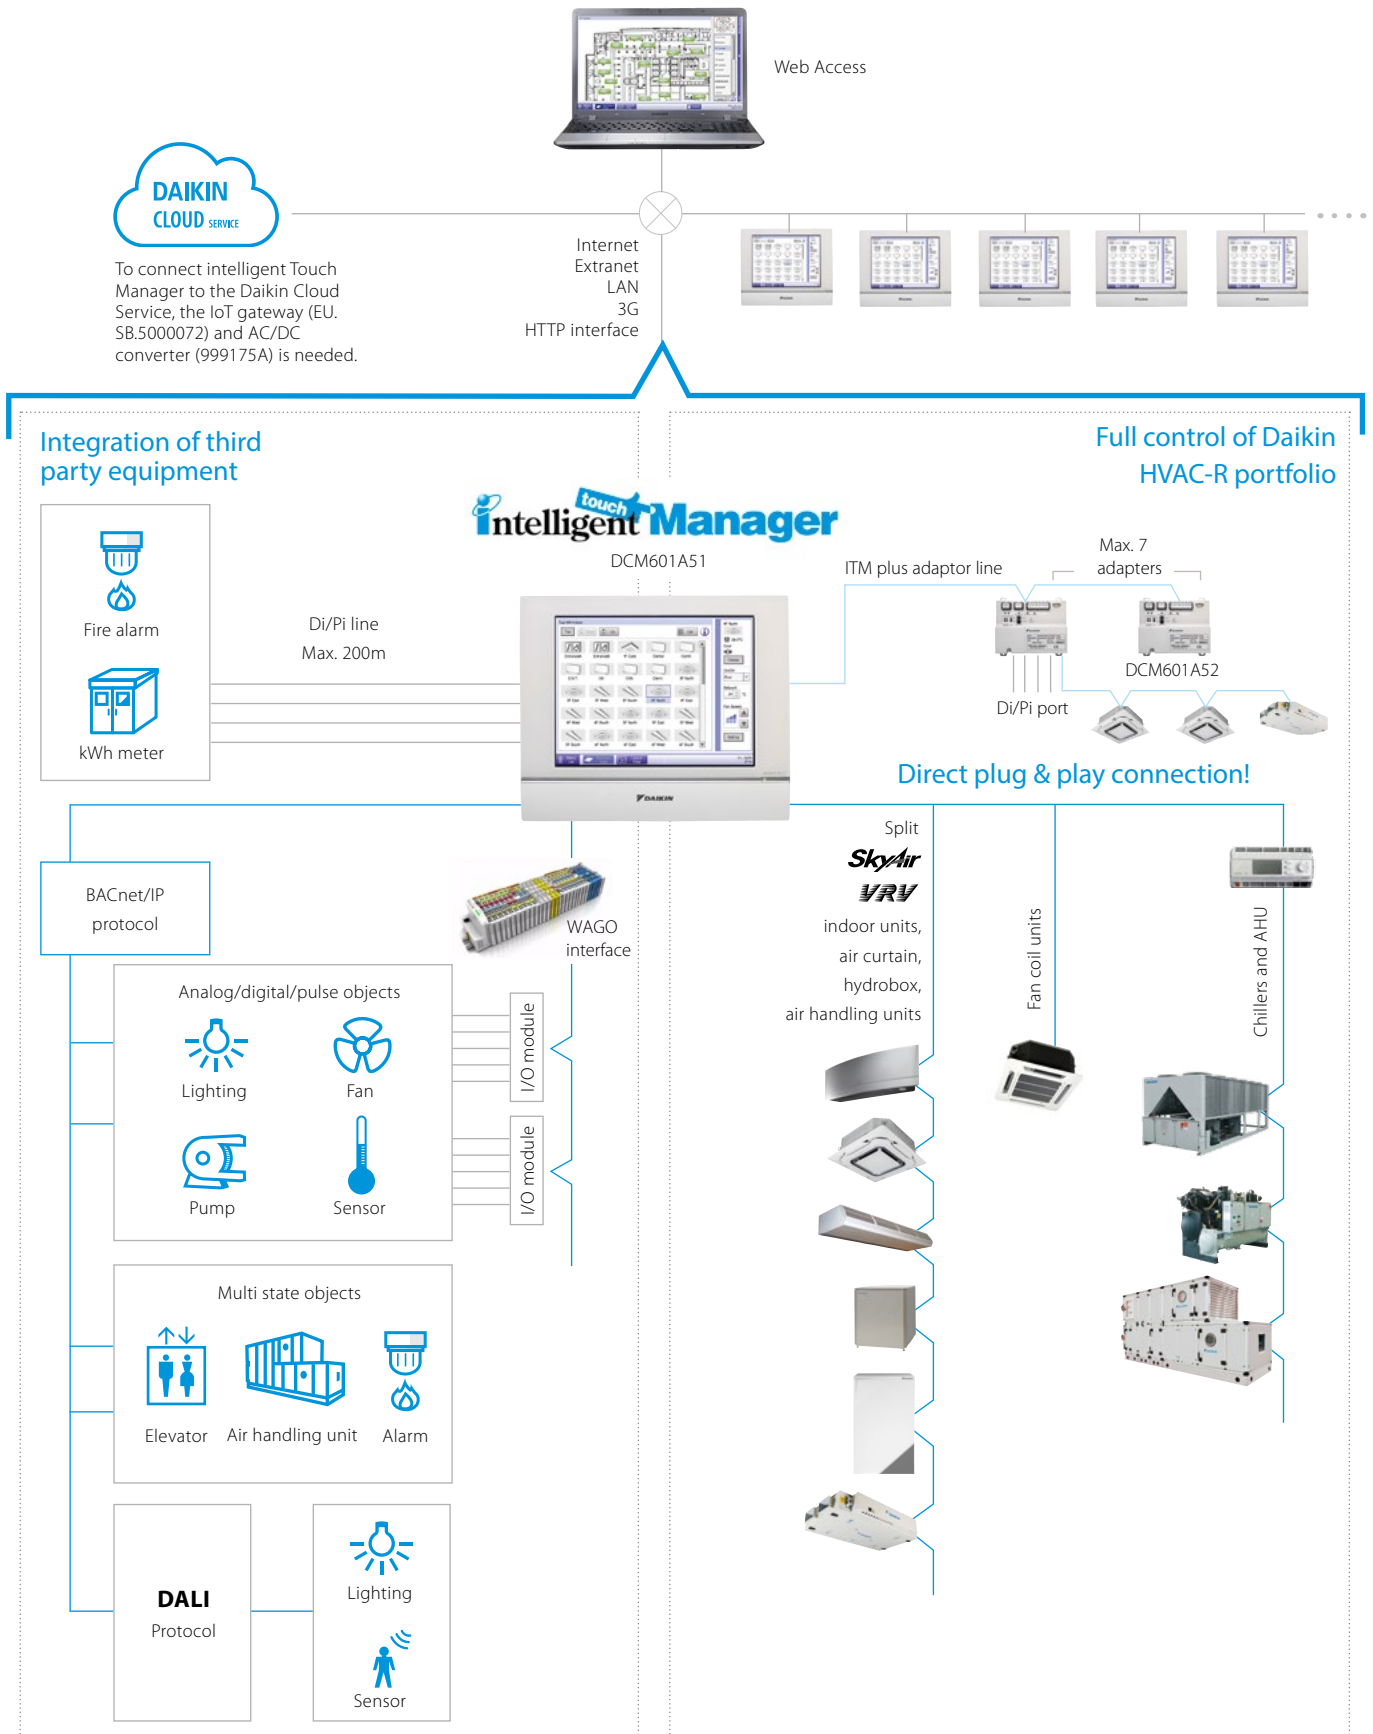


## Centralised control systems



### User friendliness

- › Intuitive user interface
- › Visual lay out view and direct access to indoor unit main functions
- › All functions direct accessible via touch screen or via web interface

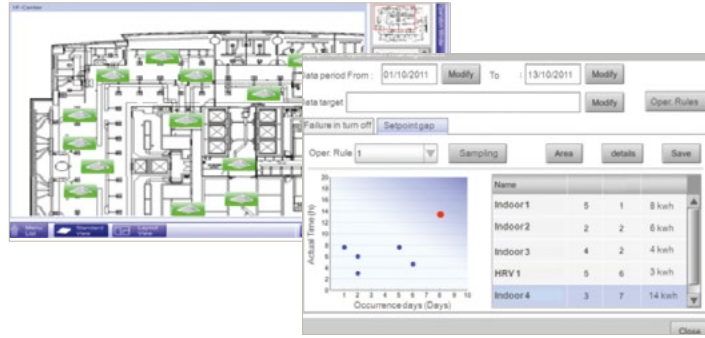

### Smart energy management

- › Monitoring if energy use is according to plan
- › Helps to detect origins of energy waste
- › Powerful schedules guarantee correct operation throughout the year
- › Save energy by interlocking A/C operation with other equipment such as heating


### Flexibility

- › Cross-pillar integration (heating, air conditioning, applied systems, refrigeration, air handling units)
- › BACnet protocol for 3rd party products integration
- › I/O for integration of equipment such as lights, pumps... on WAGO modules
- › Modular concept for small to large applications
- › Control up to 512 indoor unit groups via one ITM and combine multiple ITM via web interface


### Easy servicing and commissioning

- › Remote refrigerant containment check reducing on site visit
- › Simplified troubleshooting
- › Save time on commissioning thanks to the pre-commissioning tool
- › Auto registration of indoor units

### Plug & play

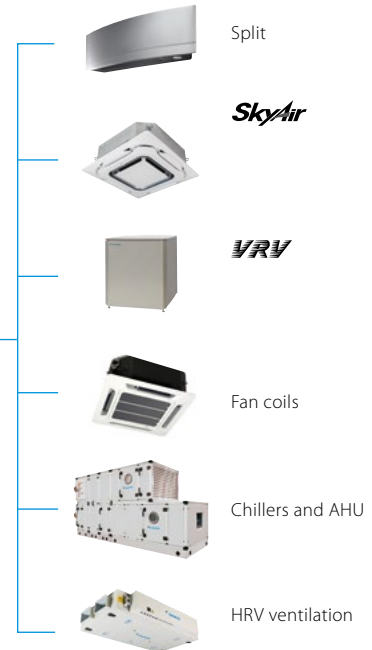

Flexibility in size  
64 up to 512 groups

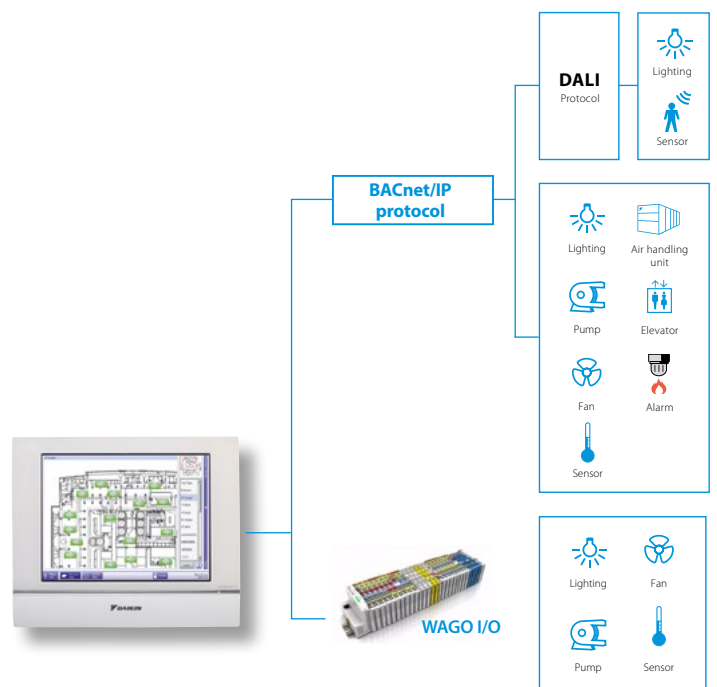

# Functions overview

## Languages

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

## Management

- › Web access via html 5
- › Power Proportional Distribution (option)
- › Operational history (malfunctions, ...)
- › Smart energy management
  - monitor if energy use is according to plan
  - detect origins of energy waste
- › Setback function
- › Sliding temperature

## WAGO Interface

- › Modular integration of 3rd party equipment
- › Large variety of input and outputs available. For more details refer to the options list

## Open http interface

- › Communication to any third party controller (domotics, BMS, etc.) is possible via http open interface (http option DCM007A51)

## System layout

- › Up to 512 unit groups can be controlled (ITM + 7 iTM Plus adapters)

## Control

- › Individual control (512 groups)
- › Schedule setting (Weekly schedule, yearly calendar, seasonal schedule)
- › Interlock control
- › Setpoint limitation
- › Temperature limit

## DALI integration

- › Control and monitor the lights
- › Easier facility management: receive error signal when light or light controller has a malfunction
- › Flexible approach and less wiring needed, compared to classic light scheme
- › Easier to make groups and control scenes
- › Connection between intelligent Touch Manager and DALI through WAGO BACnet / IP interface

## Connectable to

- DX Split, Sky Air, VRV
- HRV
- Chillers (via MT3-EKCBACIP controller)
- Daikin AHU (via MT3-EKCBACIP controller)
- Fan coils
- LT and HT hydroboxes
- Biddle Air curtains
- WAGO I/O
- BACnet/IP protocol
- Daikin PMS interface (option DCM010A51)



# Daikin Applied Europe Control Solutions

## Chiller Intelligent Manager

The intelligent Chiller Manager is a factory-engineered control solution to manage a chiller plant room. It is responsible for the **optimal sequencing and staging** of Chillers, Heat Pumps and Multipurpose units even in a **mixed plant configuration** and in both Heating and Cooling modes.

The extended control solution integrated the management of Cooling Towers and manifolded Pumps for air and water cooled chiller plant.

By reaching higher plant performance and efficiency levels, the intelligent Chiller Manager is the best and qualified solution for your HVAC equipment in a wide range of **Applications**.

### Key Benefits

- > High performance
- > Lower energy & Maintenance Costs
- > Increase reliability & lifetime
- > Remote control and monitoring through Daikin on Site
- > **No additional installation required**

intelligent  
COOLING TOWER  
Management

### Microtech® 4 Unit Controller

The new **Microtech® 4 (MT4)** controller is **faster, smarter and connected**. With the hardware improvements introduced by the new controller on all air/water cooled chillers, **advanced logics and algorithms** development at unit level are possible.

Communication protocols like **Modbus** and **BACNet** are also available without any additional hardware required because the MT4 controller supports them natively.






## Daikin on Site

Daikin on Site is the unique solution for remote monitoring and smart maintenance. It allows a complete remote operation of every unit with different users and levels of access.

Daikin on site is fully compatible with All Daikin Applied Europe products and it can integrate **third-party products** like **IoT devices** (i.e. IAQ sensors).

Daikin has developed two offers called Daikin on Site: Partner and Daikin on Site: Premium.

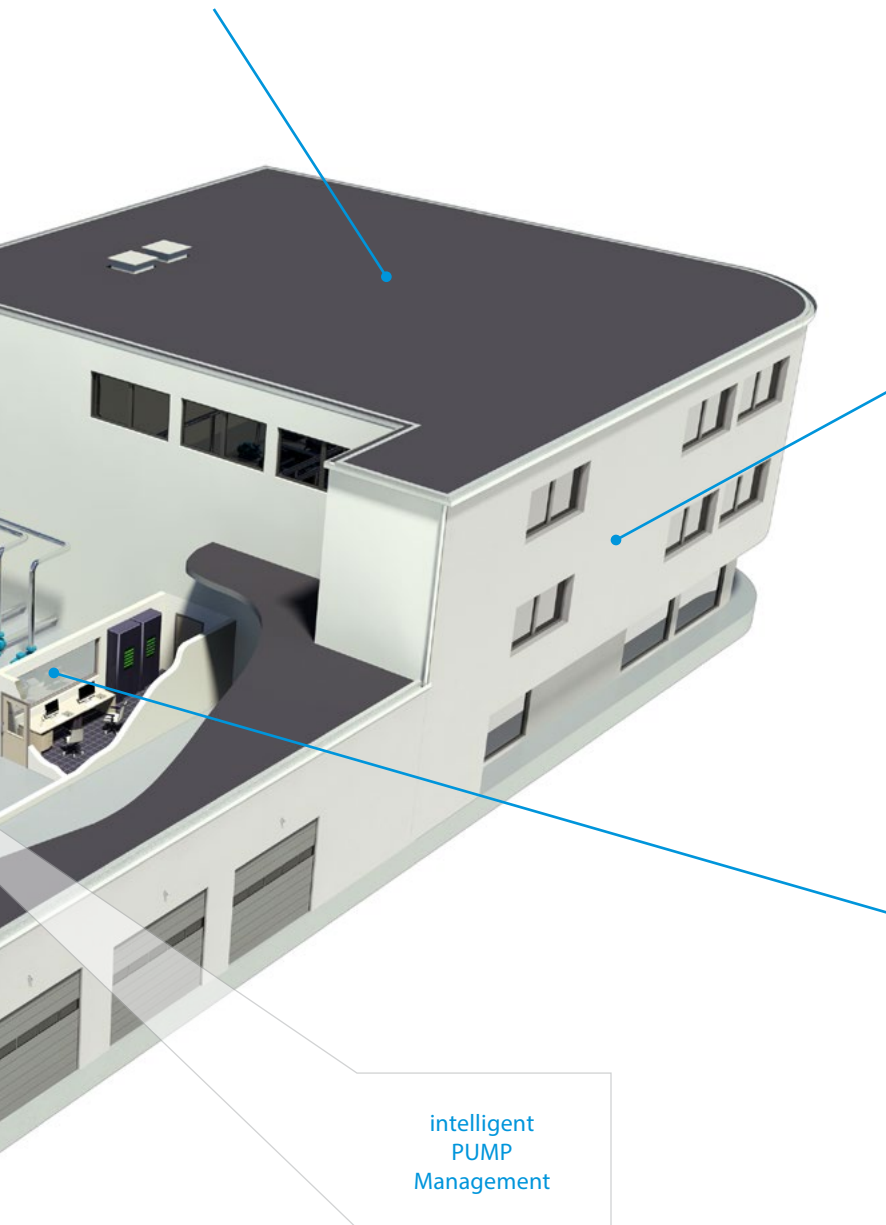

intelligent  
PUMP  
Management

REMOTE MONITORING

REPORTING

ALARM TROUBLESHOOTING

ENERGY ANALYSIS

REFRIGERANT LEAKAGE DETECTION



## Building management system Integration

With MT4 unit the communication protocols such as **Modbus** and **BACNet** are available directly from the controller and activated from Factory when ordered or through the after-sales channel.



## Performance Monitoring

With MT4, advanced algorithms implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This **sensor-less algorithm** calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard, **no extra-hardware is required.**



## Factory-engineered system control to manage a chiller plant room

Thus optimising its performance and increasing its reliability by:

- › Optimal start-up, sequencing & staging of chillers
- › Matching chiller capacity to load demand

### iCM's main functionalities:

#### Availability

Determines whether chillers are available or not, based on:

- › Inputs from the chiller unit controllers
- › Modbus communication status
- › Pump status

#### Sequencing

Optimises the order in which available chillers are turned on and off depending on operating hours, energy efficiency, etc.

#### Staging


Calculates **energy-optimal stage-up/stage-down** of the chiller by determining the increased capacity demand by capacity control, compensation of temperature and rotation. This function aims at providing the most energy-efficient combination of chillers on a continuous basis.

#### Stopping Last Chiller/Recycling

Captures a rise in demand when the **last chiller is staged down**, by operating the pump dedicated to the next ON chiller at a minimum VFD frequency.

#### Min/Max Operating Chiller Setting

Ensures that the number of operating chillers always **stays within a certain range**, regardless of changes in demand.

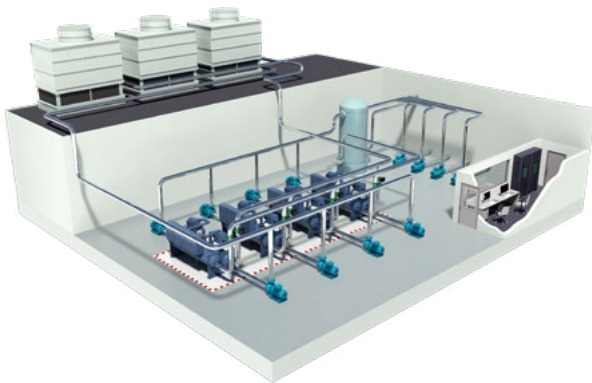

## Why choose iCM?

- › Optimise performance
- › Increase reliability
- › Reduce energy costs
- › Reduce maintenance costs
- › Factory-engineered and tested
- › Remote control and monitoring. From one-time commissioning to real-time commissioning

**Daikin is the best qualified partner to optimise the operation of a Daikin chiller plant room.**


## Remote control and monitoring possibilities

(valid for both Standard and Customised versions)

- › **Connectivity to Daikin's remote monitoring and control system ([www.daikinonsite.com](http://www.daikinonsite.com))** for remote monitoring and service providing Internet connection to the main controller
- › **Integration with general BAS/BMS** offered through BACnet or Modbus Modules based on BACnet/IP or Modbus RTU/RS-485 protocols
- › **Built-in HMI, Remote HMI, Web HMI and [daikinonsite.com](http://daikinonsite.com)** are available for control and configuration



# Integrated logics for Plant Management

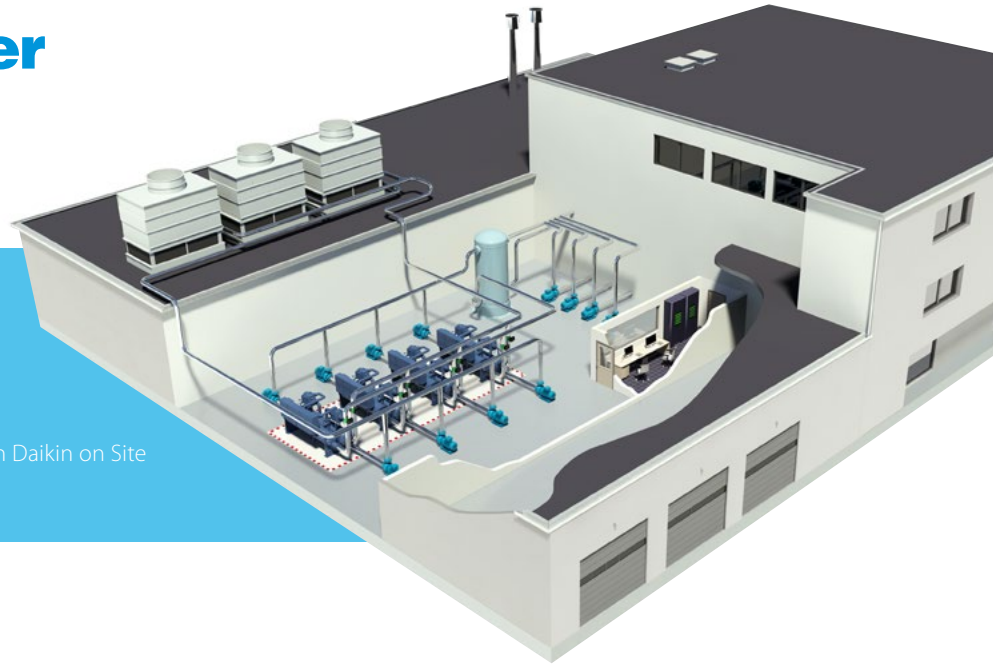

## Key Benefits

- › High performance
- › Lower energy & Maintenance Costs
- › Increase reliability & lifetime
- › Remote control and monitoring through Daikin on Site
- › **No additional installation required**

## Control strategies

Advanced control strategies can be chosen to optimise units life time and the energy efficiency of a chillers plant:

- › by sequencing it is decided which unit must start or stop
- › by staging the unit shares the load based on a threshold specified by the user

## Control options

iCM can manage:

- › Special control options such as: VPF, Demand Limit, Rapid Restart are managed by iCM in a multiple unit system
- › Heat recovery option management
- › Free cooling option management
- › Manifolded pumps management (evaporator/condenser) – iPM control panel is required
- › Cooling tower system management – iCT control panel is required

## What are the main differences between Master/Slave and iCM?

For Daikin unit equipped with MT4, iCM are set of functions embedded directly in the unit controller. In addition for those applications not covered by the embedded functions, iCM customized are also available.

While Master/Slave can manage systems composed by units model of the same type, iCM can manage cooling, heating and plants made of different kind of units

Feature	Master/Slave	New iCM
Number of chillers	UP TO 4	UP TO 8
Plants with All Chillers	same models	YES
Plants with all Heat Pumps	same models	YES
Plants with Multipurpose	YES	YES
<b>Mix of Chillers (max 2 circuits) + Multipurpose</b>	NO	<b>YES</b>
<b>Mix of Chillers + Heat Pumps</b>	NO	<b>YES</b>
<b>Chillers with Heat Recovery</b>	NO	<b>YES</b>
<b>Chillers with free cooling</b>	NO	<b>YES</b>
Units with modulable capacity control	YES	YES
Units with step capacity control	YES	YES

# Product line-up



## iCM Standard new PRODUCT LINE-UP based on MT4

**ICM as unit option 184:**



- › Up to 8 daikin chillers
- › Mixed systems (Chiller + heat pumps or chillers + multipurpose)
- › Heating/cooling operating modes
- › Heat recovery management
- › Free cooling management
- › Units with modifiable capacity control
- › Units with step capacity control

**Intelligent Pump Manager:**


- › Up to 5 dedicated or manifolded pumps (evaporator or condenser)
- › Up to 10 dedicated or manifolded pumps (evaporator or condenser)

**Intelligent Cooling Tower Manager:**

- › Up to 10 manifolded cooling towers (available with Pump Manager at the condenser side)

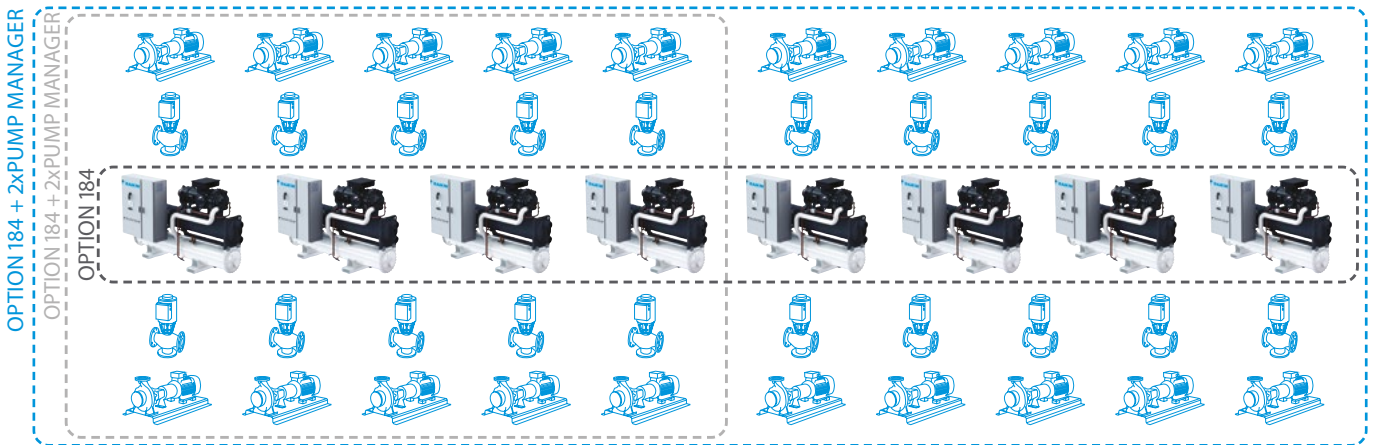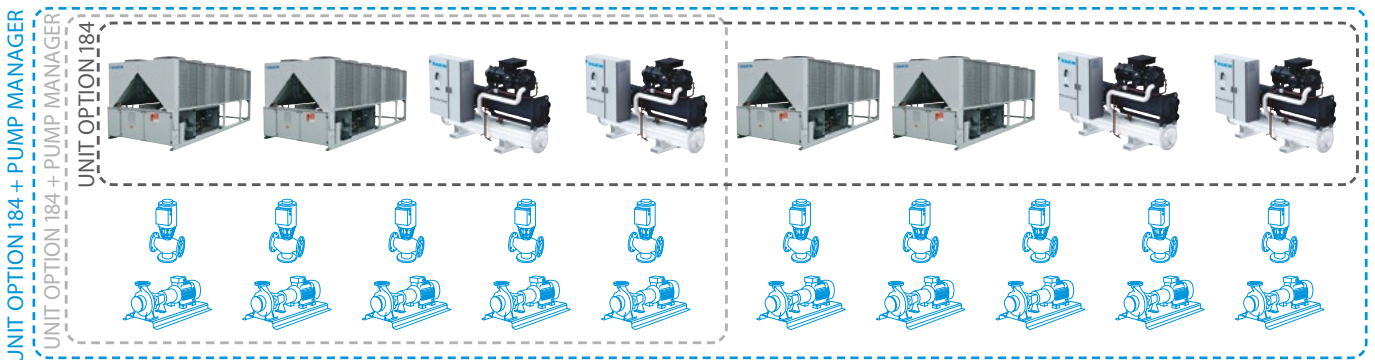

Up to 10 COOLING TOWER MANAGER (only available with PUMP MANAGER at the condenser side)

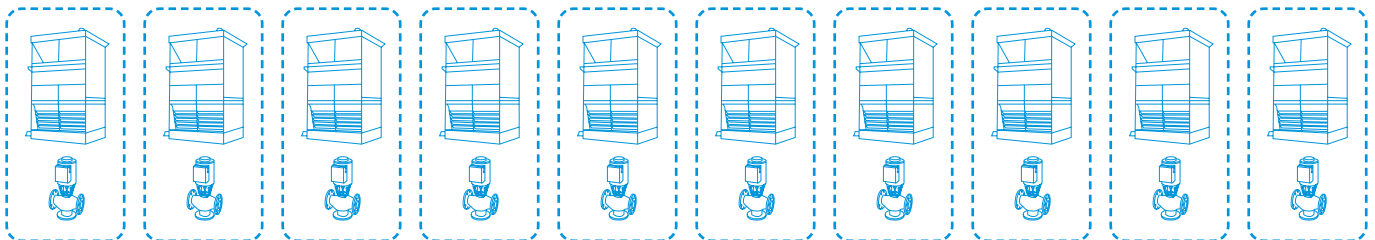



## Standard protocol interfaces

### RTD

## Modbus Interface

### RTD-RA

- › Modbus interface for monitoring and control of residential indoor units

### RTD-NET

- › Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM

### RTD-10

- › Advanced integration into BMS of Sky Air, VRV, VAM and VKM through either:
  - Modbus
  - Voltage (0-10V)
  - Resistance
- › Duty/standby function for server rooms

### RTD-20

- › Advanced control of Sky Air, VRV, VAM/VKM and air curtains
- › Clone or independent zone control
- › Increased comfort with integration of CO<sub>2</sub> sensor for fresh air volume control
- › Save on running costs via
  - pre/post and trade mode
  - set point limitation
  - overall shut down
  - PIR sensor for adaptive deadband

### RTD-HO

- › Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM
- › Intelligent hotel room controller

### RTD-W


- › Modbus interface for monitoring and control of Daikin Altherma Flex Type, VRV HT hydrobox and small inverter chiller

### DCOM-LT/MB

- › Modbus interface of Daikin Altherma air-to-water heat pumps, hybrid heat pumps and ground source heat pumps

### DCOM/LT-IO

- › Voltage & resistance control in addition to Modbus

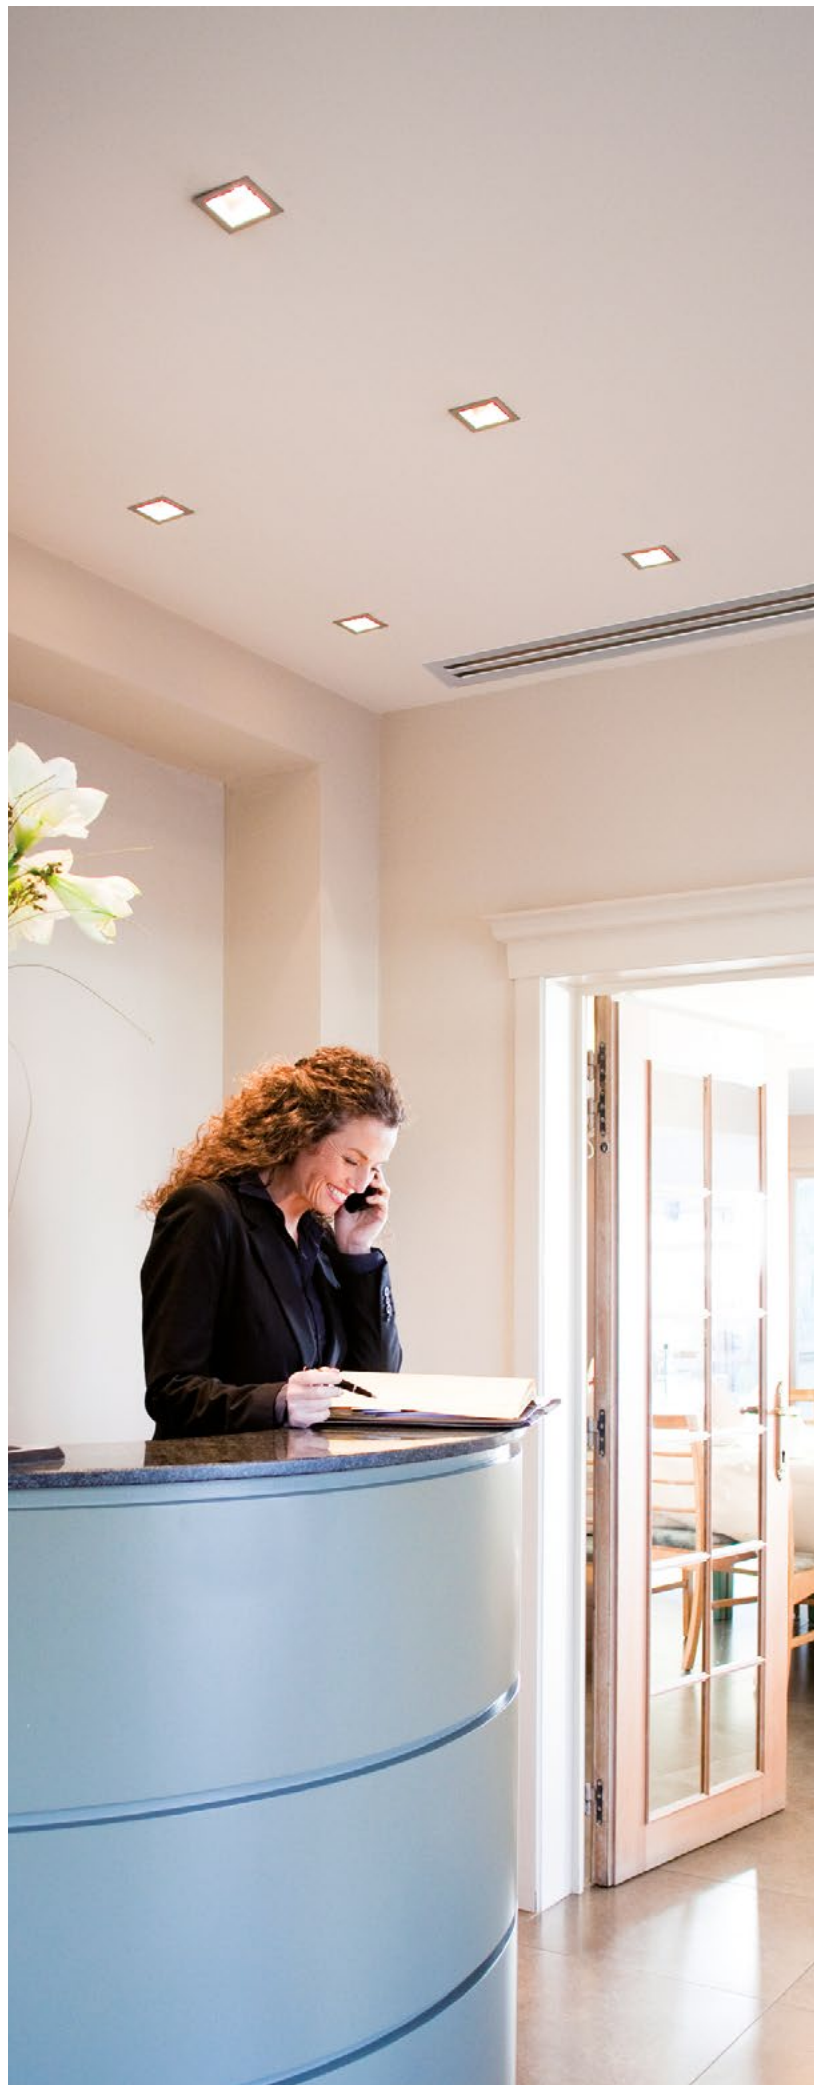

## Overview functions



Main functions			RTD-RA	RTD-NET	RTD-10	RTD-20	RTD-HO
Dimensions	H x W x D	mm	80 x 80 x 37,5			100 x 100 x 22	
Key card + window contact							✓
Set back function			✓				
Prohibit or restrict remote control functions (setpoint limitation, ...)			✓	✓	✓	✓**	✓
Modbus (RS485)			✓	✓	✓	✓	✓
Group control			✓(1)	✓	✓	✓	✓
0 - 10 V control					✓	✓	
Resistance control					✓	✓	
IT application			✓		✓	✓	
Heating interlock					✓	✓	
Output signal (on/defrost, error)					✓	✓***	✓
Retail application						✓	
Partitioned room control						✓	
Air curtain				✓***	✓***	✓	

(1): By combining RTD-RA devices

Control functions	RTD-RA	RTD-NET	RTD-10	RTD-20	RTD-HO
On/Off	M,C	M	M,V,R	M	M*
Set point	M	M	M,V,R	M	M*
Mode	M	M	M,V,R	M	M*
Fan	M	M	M	M	M*
Louver	M	M	M	M	M*
HRV Damper control	M	M	M,V,R	M	M*
Prohibit/Restrict functions	M	M	M,V,R	M	M*
Forced thermo off	M				

Monitoring functions	RTD-RA	RTD-NET	RTD-10	RTD-20	RTD-HO
On/Off	M	M	M	M	M
Set point	M	M	M	M	M
Mode	M	M	M	M	M
Fan	M	M	M	M	M
Louver	M	M	M	M	M
RC temperature		M	M	M	M
RC mode		M	M	M	M
N° of units		M	M	M	M
Fault	M	M	M	M	M
Fault code	M	M	M	M	M
Return air temperature (Average /Min/Max)	M	M	M	M	M
Filter alarm		M	M	M	M
Thermo on	M	M	M	M	M
Defrost		M	M	M	M
Coil In/Out temperature	M	M	M	M	M



Main functions			RTD-W
Dimensions	H x W x D	mm	100x100x22
On/off prohibition			✓
Modbus RS485			✓
Dry contact control			✓
Output signal (operation error)			✓
Space heating / cooling operation			✓
Domestic hot water control			✓
Smart Grid control			

Control functions	RTD-W
On/Off Space heating/cooling	M,C
Set point leaving water temperature (heating / cooling)	M,V
Room temperature setpoint	M
Operation mode	M
Domestic Hot water ON	
Domestic Hot Water reheat	M,C
Domestic Hot Water reheat setpoint	
Domestic Hot Water storage	M
Domestic Hot Water Booster setpoint	
Quiet mode	M,C
Weather dependent setpoint enable	M
Weather dependent curve shift	M
Fault/pump info relay choice	
Control source prohibition	M

Smart grid mode control	RTD-W
Prohibit Space heating/cooling	
Prohibit DHW	
Prohibit Electric heaters	
Prohibit All operation	
PV available for storage	
Powerful boost	

Monitoring functions	RTD-W
> On/Off Space heating/cooling	> M,C
> Set point leaving water temperature (H/C)	> M
> Room temperature setpoint	> M
> Operation mode	> M
> Domestic Hot Water reheat	> M
> Domestic Hot Water storage	> M
> Number of units in the group	> M
> Average leaving water temperature	> M
> Remocon room temperature	> M
> Fault	> M,C
> Fault code	> M
> Circulation pump operation	> M
> Flow rate	
> Solar pump operation	
> Compressor status	> M
> Desinfection operation	> M
> Setback operation	> M
> Defrost/ start up	> M
> Hot start	
> Booster Heater operation	
> 3-Way valve status	
> Pump running hours accumulated	> M
> Compressor running hours accumulated	
> Actual leaving water temperature	> M
> Actual return water temperature	> M
> Actual DHW tank temperature (*)	> M
> Actual refrigerant temperature	
> Actual outdoor temperature	> M

M : Modbus / R : Resistance / V : Voltage / C: control

\* : only when room is occupied / \*\* : setpoint limitation / (\*) if available

\*\*\* : no fan speed control on the CVY air curtain / \*\*\*\* : run & fault



EKMBDXB

# DIII-net Modbus interface



Integrated control system for seamless connection between Split, Sky Air, VRV and small inverter chillers and BMS systems


- › Communication via Modbus RS485 protocol
- › Detailed monitoring and control of the VRV total solution
- › Easy and fast installation via DIII-net protocol
- › As the Daikin DIII-net protocol is being used, only one modbus interface is needed for a group of Daikin systems (up to 10 outdoor units systems).

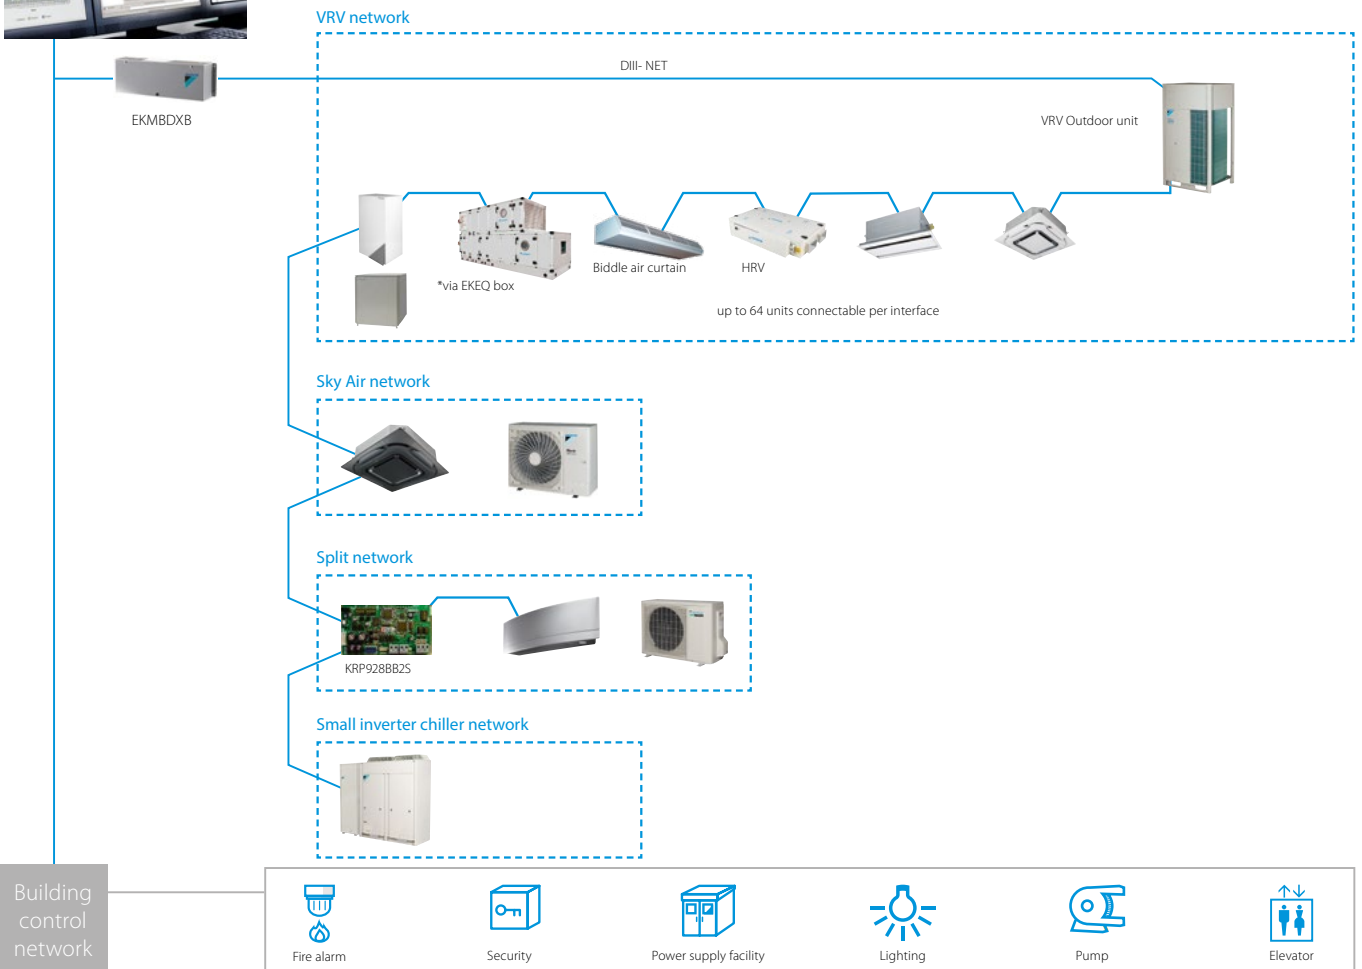

		<b>EKMBDXB7V1</b>	
Maximum number of connectable indoor units		64	
Maximum number of connectable outdoor units		10	
Communication	DIII-NET - Remark	DIII-NET (F1F2)	
	Protocol - Remark	2 wire; communication speed: 9600 bps or 19200 bps	
	Protocol - Type	RS485 (modbus)	
	Protocol - Max. Wiring length	m	500
Dimensions	HeightxWidthxDepth	mm	124x379x87
Weight		kg	2.1
Ambient temperature - operation	Max.	°C	60
	Min.	°C	0
Installation		Indoor installation	
Power supply	Frequency	Hz	50
	Voltage	V	220-240

# Modbus interface


Integrate chillers, fan coil units and air handling units in BMS systems via modbus protocol

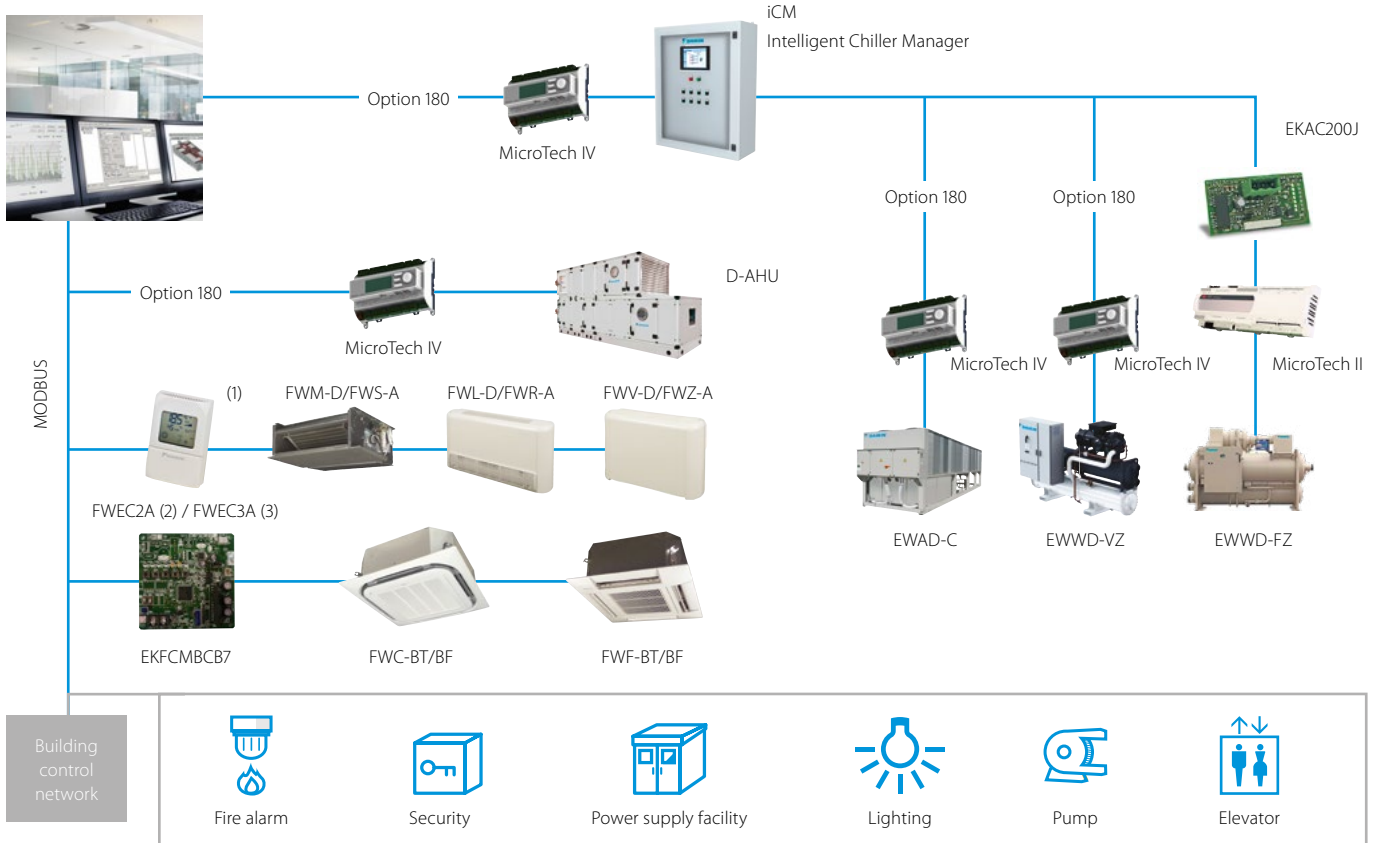

(1) The communication module is integrated in the controller (2) Connection to FWV-D, FWL-D & FWM-D (3) Connection to FWV-D, FWL-D, FWM-D and to FWZ-A, FWR-A, FWS-A

Integrate Refrigeration units in BMS systems via modbus protocol

## BRR9A1V1

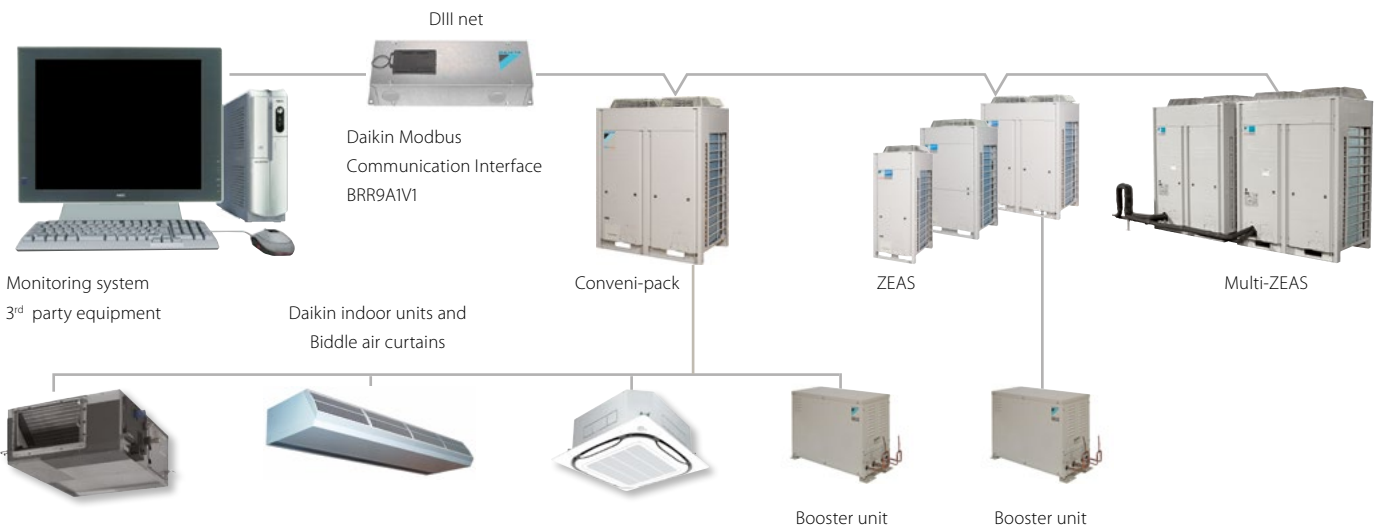

\* For all connectable indoor units and Biddle air curtains please refer to the Conveni-pack pages in this catalogue


## Standard protocol interfaces

KLIC-DDV3  
KLIC-DI\_V2


# KNX interface

### Integration of Split, Sky Air and VRV in HA/BMS systems

#### Connect split indoor units to KNX interface for Home Automation system

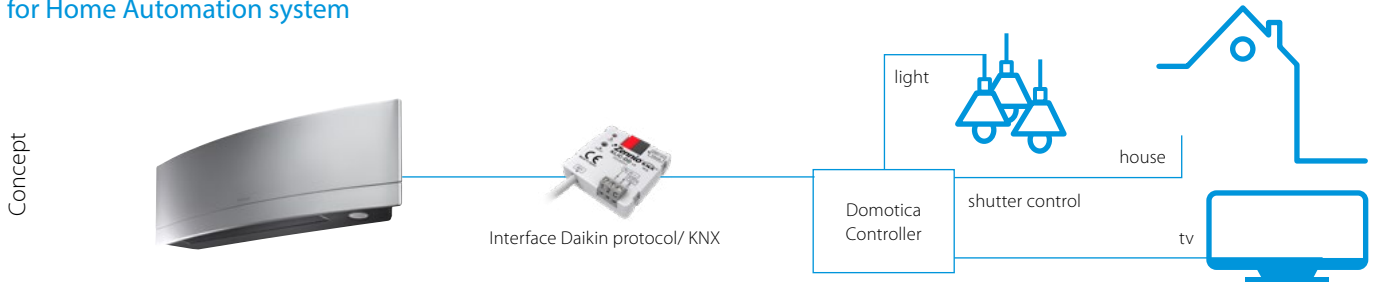

#### Connect Sky Air / VRV indoor units to KNX interface for BMS integration

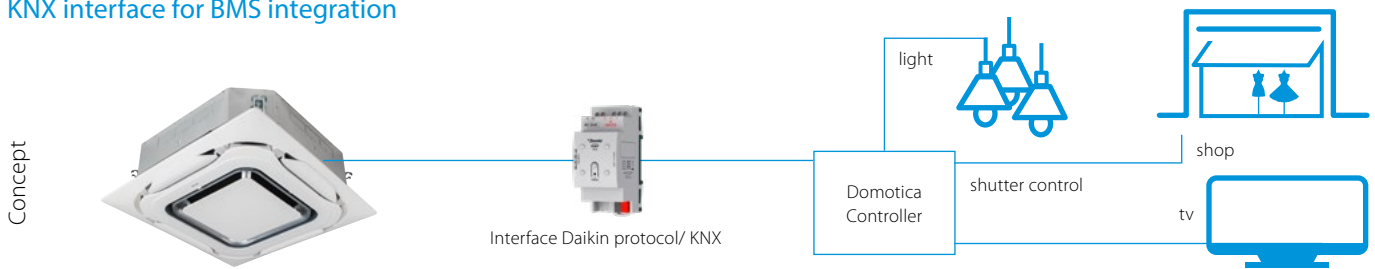



## KNX interface line-up

The integration of Daikin indoor units through the KNX interface allows monitoring and control of several devices, such as lights and shutters, from one central controller. One particularly important feature is the ability to programme a 'scene'

- such as "Home leave" - in which the end-user selects a range of commands to be executed simultaneously once the scenario is selected. For instance in "Home leave", the air conditioner is off, the lights are turned off, the shutters are closed and the alarm is on.

## KNX interface for

	 <b>KLIC-DDV3 size 45x45x15mm</b> Split	 <b>KLIC-DI_V2 size 90x60x35mm</b> Sky Air	<b>VRV</b>
<b>Basic control</b>			
On/Off	●	●	●
Mode	Auto, heat, dry, fan, cool	Auto, heat, dry, fan, cool	Auto, heat, dry, fan, cool
Temperature	●	●	●
Fan speed levels	3 or 5 + auto	2 or 3	2 or 3
Swing	Stop or movement	Stop or movement	Swing or fixed positions (5)
<b>Advanced functionalities</b>			
Error management	Communication errors, Daikin unit errors		
Scenes	●	●	●
Auto switch off	●	●	●
Temperature limitation	●	●	●
Initial configuration	●	●	●
Master and slave configuration		●	●



DCM010A51

# PMS Interface

# Hotel interface connecting Daikin HVAC with Oracle Property Management Systems

## Features

- User-friendly interface for easy front desk support in hotels, conference centers, ...
- Compatible with Oracle Opera PMS (formerly known as Micros Fidelio)
- Automated push of indoor unit settings based on the Opera PMS Check-In and Check-Out commands
- Energy saving thanks to the possibility to limit temperature setpoint
- Up to 5 customized operation profiles based on weather conditions
- Available in 23 languages
- Up to 2,500 units / rooms can be managed



Room view showing room status: check-in, check-out, pre-heating / cooling status, room temperature and A/C status


HVAC settings can be easily observed and changed by the reception desk

Multiple room types (bed-room, meeting room, ...) can be defined with customized A/C settings for each type


### Hotel case example:

- › On check-in the HVAC for the room is automatically switched on
- › On check-out the HVAC for the room is automatically switched off.
- › Increased hotel customer experience by pre-heating / cooling of booked rooms

### Hotel front desk

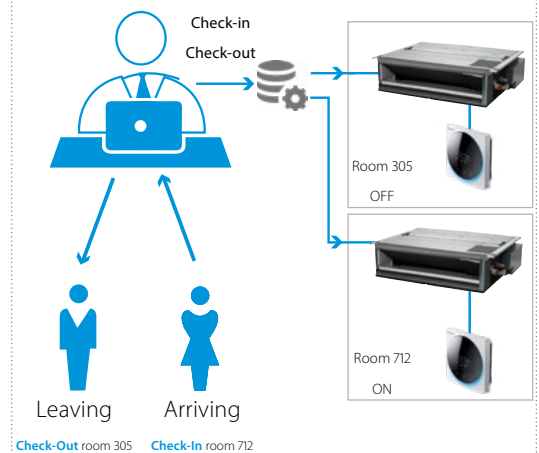

## Simplified configuration of Daikin PMS interface


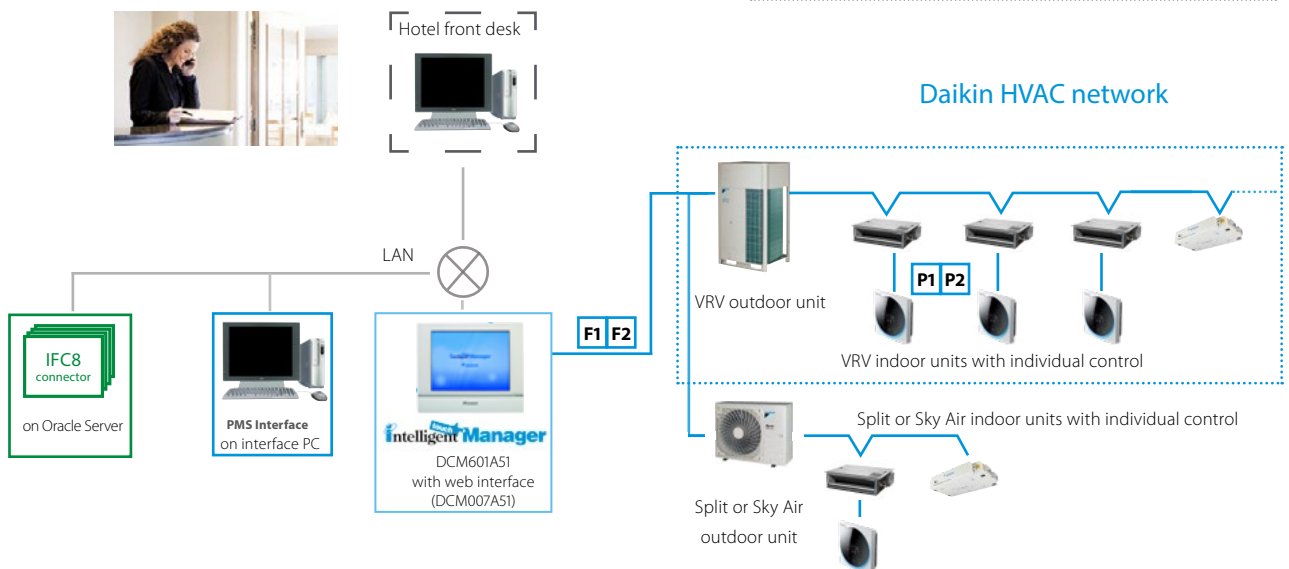


DMS502A51 / EKACBACMSTP / EKCMBACIP / EKCMBACMSTP

# BACnet Interface

Integrated control system for seamless connection between VRV, applied systems, air handling units and BMS systems

- > Interface for BMS system
- > Communication via BACnet protocol (connection via Ethernet)
- > Unlimited site size
- > Easy and fast installation
- > PPD data is available on BMS system (only for VRV)

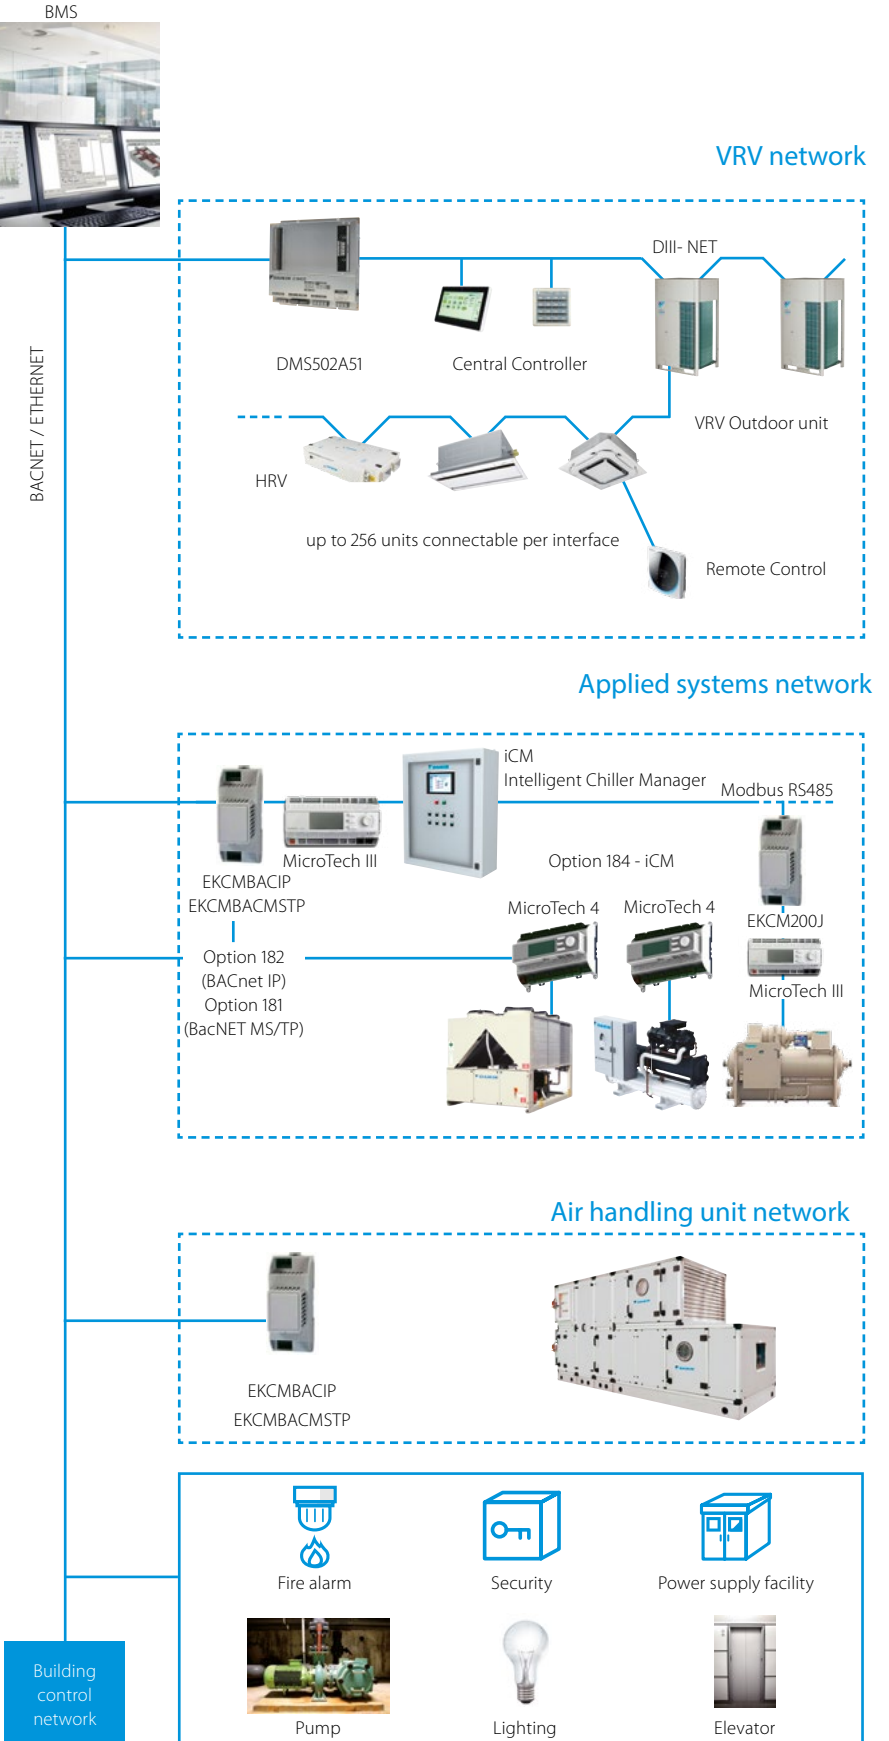


DMS504B51

# LonWorks Interface

Open network integration of VRV monitoring and control functions into LonWorks networks

- > Interface for Lon connection to LonWorks networks
- > Communication via Lon protocol (twisted pair wire)
- > Unlimited sitesize
- > Quick and easy installation

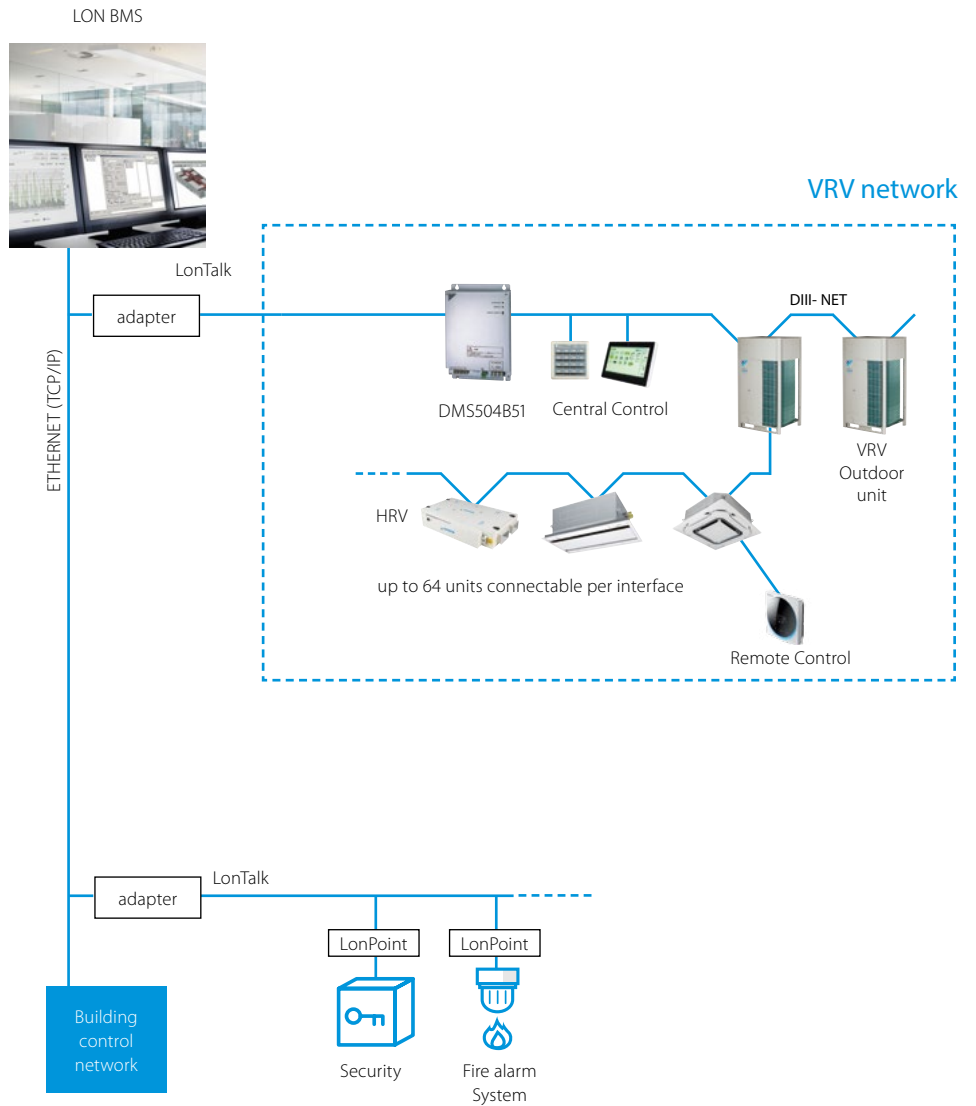

# Daikin Cloud Service

to achieve optimal operation



Daikin Cloud Service is a cloud-based remote control and monitoring solution for DX systems. Using enhanced control, monitoring and predictive logic, Daikin Cloud Service provides real-time data and support from Daikin experts to help you identify cost-saving opportunities, increase the lifetime of your equipment and reduce the risk of unexpected issues.

Monitor & control\* your system no matter where you are while teaming up with Daikin experts


## Remote control and energy visualisation

### Puts you in the driving seat of your energy management

- ✓ Control and monitor your premises, wherever you are
- ✓ Centralised control and monitoring of all your premises
- ✓ Check errors remotely without having to go on site
- ✓ Visualise energy consumption and reduce energy waste by comparing different premises
- ✓ Graphical visualization of IEQ parameters (frequency day, week, month, year)
- ✓ Export & print IEQ parameters

### Multi-site monitoring


From one to an ∞ number of sites

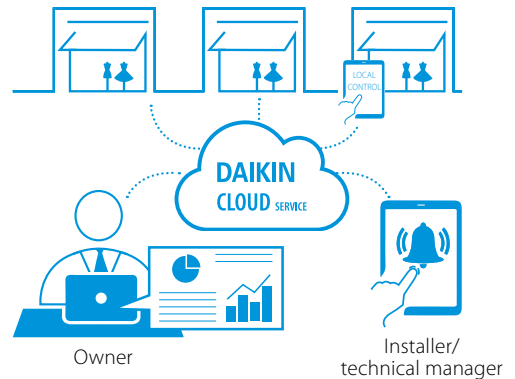

## Remote support and diagnostics

### Daikin specialist supervision, so you can focus on your core business

- ✓ Early warning of system deviations to maximise system uptime and avoid emergency repairs\*\*
- ✓ Service providers have access to operational data so they arrive on site prepared
- ✓ Remote expert assistance in case of errors

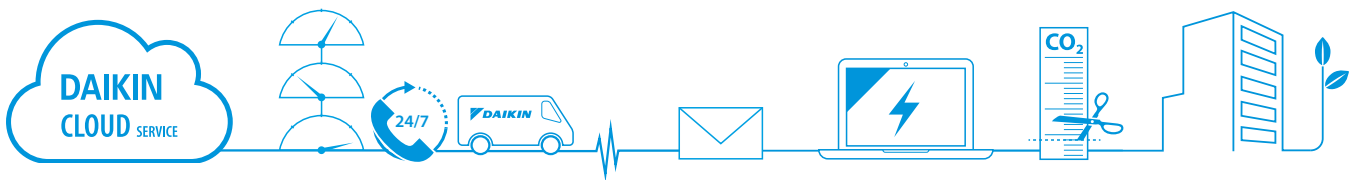

## Advice and optimisation

### Get the best out of your system through expert advice

- ✓ Periodical analysis and optimisation report by experts
- ✓ Personalised actions to maximise energy efficiency and comfort
- ✓ Increased system lifetime as the system runs as it should

**Daikin Cloud Service requires a subscription. Contact your local sales representative for more information.**

\* Remote Control function via Daikin Cloud Service only available for sites with an Intelligent Tablet controller

\*\* Only available for VRV systems

# Daikin Cloud Service packages

	Control and monitoring	Remote support and diagnostics	Advice and optimisation
Remote control, scheduling and interlocking	✓ (DCC601A51 only)	✓ (DCC601A51 only)	✓ (DCC601A51 only)
Energy monitoring	✓	✓	✓
Multi-site benchmark	✓	✓	✓
Alarm history and e-mail notifications**	✗	✓	✓
Predictions and e-mail notifications**	✗	✓	✓
Operational data access	✗	✓	✓
Indoor use analysis	✗	✓	✓
Outdoor use analysis	✗	✓	✓
Remote diagnostic and support from Daikin	✗	✓	✓
Periodical analysis and optimisation advice from Daikin	✗	✗	✓
Can be combined with maintenance programmes: - Technical inspection - Preventive Maintenance Plan - Comprehensive Maintenance Plan	✗	✗	✓

Packages subject to local availability  
Daikin Cloud Service replaces VRV Cloud and i-Net services.

## Flexible solution

Manage your premises according to your needs, using a local control or remotely via Daikin Cloud Service, or a combination of both.

## Control\*, no matter where you are

Daikin Cloud Service gives you full control of one or more premises wherever you are, using your PC, tablet or smartphone.

## Predictive logic for VRV to prevent breakdowns


The operational data is continuously analysed by Daikin algorithms to predict potential failures and avoid unexpected costs.

## Compatible with:


- › Intelligent Tablet Controller (DCC601A51)
- › Intelligent Touch Manager (DCM601A51) + IoT gateway
- › LC8 + IoT gateway



1. Clear dashboard overview

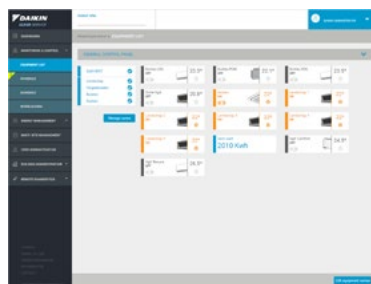


2. Monitor and control your system

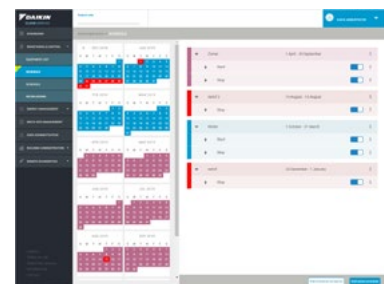

3. Easy setting of schedules



4. Energy management and consumption follow up

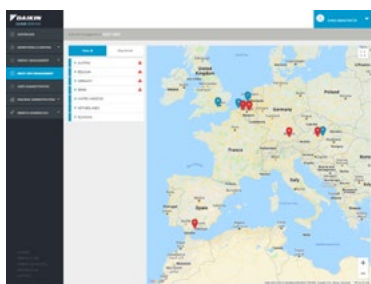

5. Multi site management



IEQ dashboard on DCS

\* Remote Control function via Daikin Cloud Service only available for sites with an Intelligent Tablet controller

\*\* Only available for VRV systems


# Daikin on Site

## Why Daikin on Site?

Operating costs like energy and maintenance typically account for 85% of the system's total lifetime cost. Undiscovered energy waste and incorrect operation will increase costs and can even lead to unscheduled interruptions.

Using Daikin on Site monitoring results in optimum use and costs over the system's entire lifetime:

- > Enhanced control and measuring
- > Monitors the system
- > Reduces risks at the earliest possible moment
- > Keeps the system running as it was intended to
- > Controls your IEQ by connecting our sensor

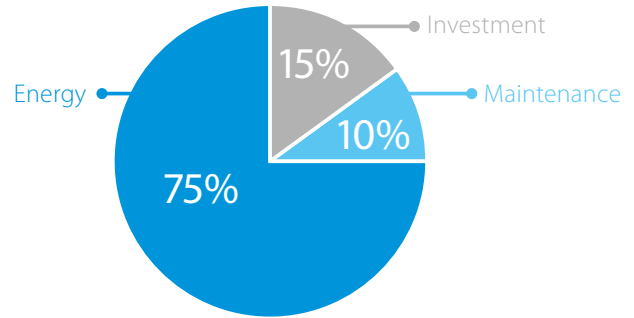

Typical Life cycle Cost of a chiller (15 years)

soon available

## What is Daikin on Site?

A solution for customer specific needs


The Daikin on Site cloud server collects operational data from the control system of a Daikin chiller or air handling unit plant. Daikin's Smartcentre then turns this data into useful information on a web user interface. Daikin on Site has predefined user roles like:


- > operator
- > service provider
- > Daikin specialists

The Daikin on Site platform's features are designed to:

- > Increase uptime, reduce unscheduled interruptions
- > Optimise efficiency and reduce energy waste
- > Increase lifetime and avoid wear by misuse
- > Give insight into the optimum use of equipment, including advice from a Daikin expert

We will combine Daikin on Site remote monitoring with the complementary service programme best suited to your needs.

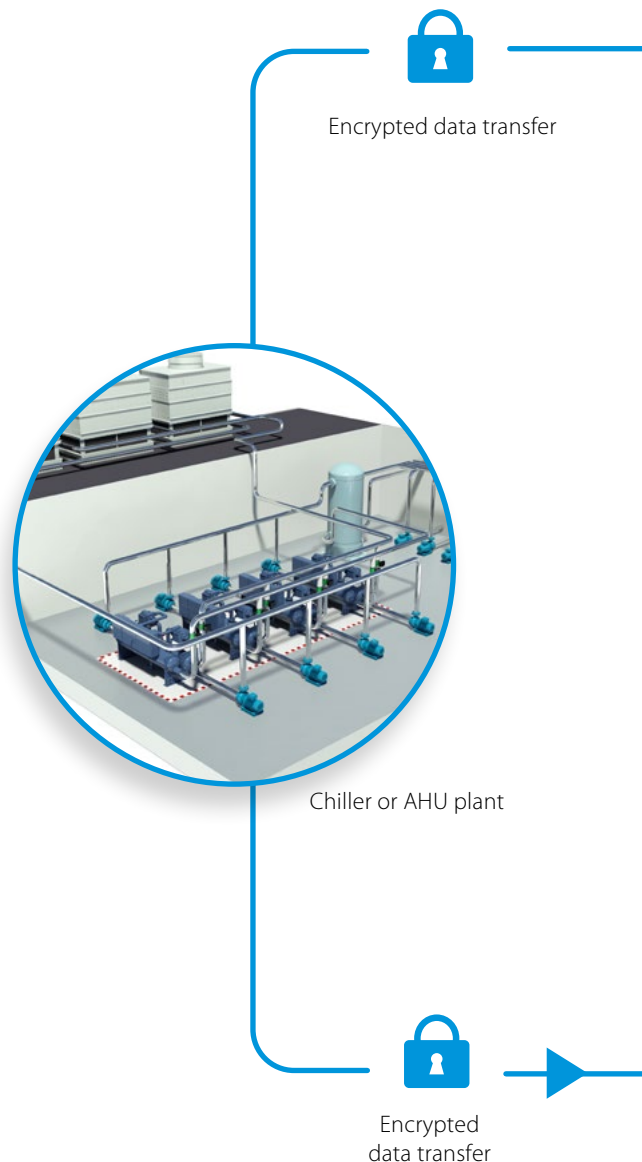

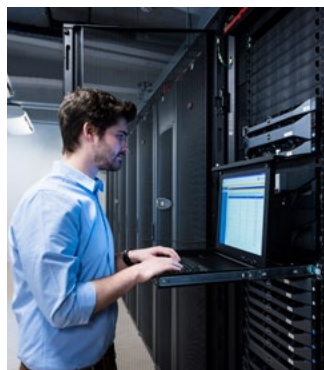

## The remote monitoring for Daikin products

Let's enter in Daikin connected HVAC with Daikin on Site cloud solution. An enriched offer meeting every needs. From a basic control up to a full and advanced monitoring of your HVAC equipment directly from your desk. A wide variety of HVAC application can benefit from Daikin on Site and its connected services.

With Daikin on Site, your HVAC equipment will reach high reliability and efficiency levels. No more stops and long waiting time for Alarm troubleshooting. Thanks to a continuous monitoring and advanced tools, Daikin on Site helps to improve the overall system lifetime. A Daikin expert is ready to help and keep monitored your plant, suggesting actions and system improvements.

Daikin on Site is the best solution to improve your HVAC efficiency.

**SOON AVAILABLE**

SERVICE TO CUSTOMER



You can hand it to us



### CONNECT

Every unit is connected, monitored and controlled through Daikin on Site. This is the perfect tool for remote on/off, setpoint adjustments and alarm notifications.



### PARTNER

Keep and maintain the control. Receive alarm notifications, troubleshoot alarms remotely, change setpoints and settings and visualize the status of your unit with graphs and trends.



### PREMIUM

Enable the full power of Daikin on Site with additional tools and services to improve energy efficiency and optimize the working conditions and operations of your Plants.



Encrypted data transfer

Local Daikin Monitoring Center

Service company monitoring center

Facility manager/owner

# IEQ Sensor

Our New Indoor Environmental  
Quality Sensor



Daikin's newest device  
measures and analyzes your  
indoor environment to  
improve your well-being





# Why Indoor Air Quality Matters

## ✓ Indoor Air Quality

Indoor Air Quality (IAQ) refers to the quality of the air in indoor environments, which affects building's occupants during their everyday lives. When designing HVAC systems for residential buildings, schools, offices, or light commercial buildings, many things must be considered. While it is important to meet the cooling and heating demand, we should also consider aspects such as ventilation, air filtration, and indoor air quality.

Did you know that breathing indoor air, whether it is at home, at the office, or in a hotel room, can be much more polluted than outdoor air? Remember that 90% of our life is spent indoors, and indoor air quality can be 2 to 5 times worse than outdoor air.

## ✓ Ventilation

Ventilation systems ensure optimal climate conditions by providing a fresh, healthy, and comfortable environment for buildings of all sizes, as well as for different applications.

In a completely closed room, air cannot easily enter or leave, causing air pollutants to accumulate which could affect the health of the people who use the room. Ventilation is essential for diluting and removing these air pollutants.

A well-maintained ventilation system with an adequate air-exchange rate have been demonstrated to be an effective solution to protect people from contaminants, including viruses.

## ✓ Indoor Air Quality components

Indoor Environment Quality (IEQ) is broader than IAQ, and includes lighting, noise, and electromagnetic fields.

### 1. Ventilation

Ensures the provision of fresh and clean air

### 2. Energy recovery

Delivers energy savings by transferring heat and moisture between airflows

### 3. Air processing

Ensures clean and healthy air by filtering out pollen, dust, and odours that are harmful to our health

### 4. Humidification

Ensures the desired moisture level in the conditioned space

## ✓ Monitoring Indoor Air Quality

Nowadays, most things that surround us can be monitored and tracked, even Indoor Air Quality (IAQ). Monitoring and tracking IAQ values can help us to understand how our surrounding environment affects our well-being, and then take action to improve the quality of the environment in which we live, whether this is our homes, the office, a restaurant, schools, or shops.

# Features

The Daikin IEQ Sensor measures your well-being by tracking indoor air quality values, environmental comfort, and electromagnetic pollution. It is available with 12 sensors and 15 parameter measures, and connects through your Wi-Fi network or via NB-IoT technology.




## Complete Standalone Installation

The Daikin IEQ Sensor does not have to be paired with another product, for an **extremely easy and completely standalone installation** that takes about a minute. The device can be powered up with **microUSB power supply (included)**.




## Caelum Monitoring Platform

The device connects to Caelum, Daikin's monitoring platform, at [www.daikiniaq.com](http://www.daikiniaq.com). This **enables you to easily monitor Indoor Air Quality levels and create regular reports based on the data detected by the sensor**. You can even use the platform to show your indoor air quality levels to your visitors.

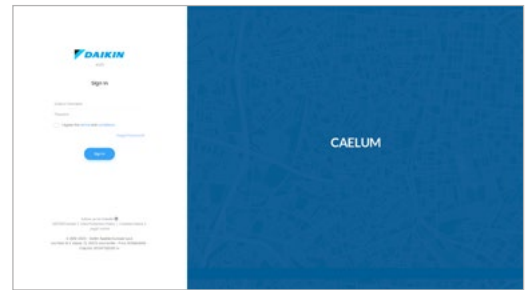

## Mobile App

The **mobile app is available as Daikin AirSense on both the App Store and Play Store**. Once installed on your mobile device and logged in, scan the QR code on the IAQ sensor and **the app will guide you through the entire configuration process**. Once your sensor is configured, you will have access to the entire set of functions from your mobile.

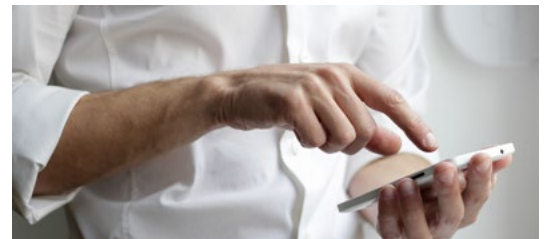

## Connectivity


The IEQ sensor ensures **perfect integration with Daikin on Site and Daikin Cloud Service, Daikin's remote monitoring and smart maintenance platform**. It gives you perfect control over the entire heating, ventilation and air conditioning system installed in your building.



## Green Building Certification


Installing the Daikin IEQ sensor can help you achieve better sustainability ratings and green building projects certified with **LEED and WELL certification** thanks to **Indoor Environmental Quality credits**.





## Video wall


The video wall is a great tool to have a general overview of the measurements conducted by the device. This screen can be shared with the occupants of the buildings to show in each moment the Indoor Air Quality status.



## Communication capability

**IoTNB:** This technology can reach devices in areas where reception is poor or difficult to reach. Complete standalone installation. This is a perfect solution for service purposes where access to local Wi-Fi is not allowed or not available.

**Wi-Fi:** Easy and complete standalone installation.



85 x 85 x 60 mm

## Sensor characteristics

### AMBIENT LIGHT

Range: 0 lux to 120000 lux  
Precision: ±10%  
Resolution: 0,1 lux

### TEMPERATURE

Range: -40 °C a 85 °C  
Precision: ±1 °C (between 0 °C and 65 °C)  
Resolution: 0,1 °C

### HUMIDITY

Range: 0 to 100% RH  
Precision: ±3% RH  
Resolution: 0,1% RH

### AIR PRESSURE HPA

Range: 300 to 1100 mbar (hPa)  
Precision: ± 1 mbar (hPa)  
Resolution: 0,18 mbar (hPa)

### SOUND PRESSURE

Range: 35 to 120 dBspl  
Frequency: from 50 Hz to 20 KHz  
Precision: ±1 dBspl  
Resolution: 0,1 dBspl

### FINE DUST

Concentration Measure PM10/PM2.5:0  
µg/m<sup>3</sup> to 1000 µg/m<sup>3</sup>  
Precision: (from 0 µg/m<sup>3</sup> to 100 µg/m<sup>3</sup>) : ±15 µg/m<sup>3</sup>  
Precision: (from 100 µg/m<sup>3</sup> to 1000 µg/m<sup>3</sup>) : ±15%  
Resolution: 1 µg/m<sup>3</sup>

### ELECTROSMOG

LF Range: 0-400000 nT - Range: 5 Hz - 120 Hz  
Precision: ±5% - Resolution: 25nT  
HF Range: 0 - 10 V/m - Range: 50 MHz - 300 GHz  
Precision: ±10% - Resolution: 0,1 V/m  
Measurements performed on 3 axes

### AIR QUALITY

Range: 0 to 500  
Precision: ±10%  
Resolution: 0,1

### CO<sub>2</sub>

Range: 0 to 5000 ppm  
Precision: ±30 ppm (between 0 and 1000 ppm)  
±3% (over 1000 ppm)  
Resolution: 1 ppm

### TVOC

Range: 0 ppb to 1187 ppb  
Resolution: 1 ppb  
Precision: ±10%

### CO<sub>2</sub>e

Range: 400 to 8192 ppm  
Precision: ±10%  
Resolution: 1 ppm

### Wi-Fi NETWORKS & SIGNAL INTENSITY (2,4GHz band)

Detects Access Point n° in band 2.4Ghz and overall signal level (from 0 to -100 dBm)

EKPCCAB4

## Daikin Configurator Tool + Software

Simplified commissioning:  
graphical interface to configure, commission  
and upload system settings

### Simplified commissioning

The Daikin configurator for Daikin Altherma and VRV is an advanced software solution that allows for easy system configuration and commissioning:

- › Less time is required on the roof configuring the outdoor unit
- › Multiple systems at different sites can be managed in exactly the same way, thus offering simplified commissioning for key accounts
- › Initial settings on the outdoor unit can be easily retrieved



Simplified  
commissioning



Retrieve initial  
system settings



## K.RSS


## Wireless room temperature sensor

### Flexible and easy installation

- › Accurate temperature measurement thanks to flexible placement of the sensor
- › No need for wiring
- › No need to drill holes
- › Ideal for refurbishment



### Connection diagram Daikin indoor unit PCB (FXSQ example)

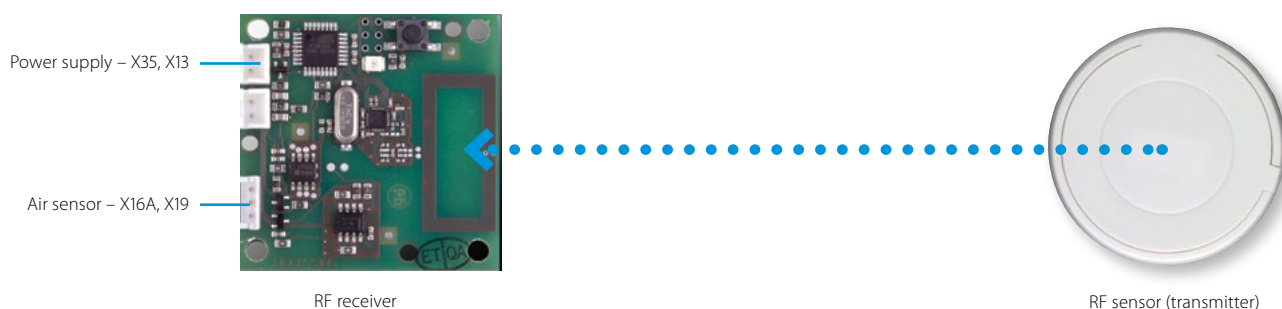

### Specifications

		Wireless room temperature sensor kit (K.RSS)	
		Wireless room temperature receiver	Wireless room temperature sensor
Dimensions	mm	50 x 50	ø 75
Weight	g	40	60
Power supply		16VDC, max. 20 mA	N/A
Battery life		N/A	+/- 3 years
Battery type		N/A	3 Volt Lithium battery
Maximum range	m		10
Operation range	°C		0~50
Communication	Type		RF
	Frequency	MHz	868.3

- › Room temperature is sent to the indoor unit every 90 seconds or if the temperature difference is 0.2°C or larger.

## KRCS\*

## Wired room temperature sensor

- › Accurate temperature measurement, thanks to flexible placement of the sensor
- › Specific model code for each indoor unit can be found in the option tables












### Specifications

Dimensions (HxW)	mm	60 x 50
Weight	g	300
Length of branch wiring	m	12

# ADAPTER PCBs




## Simple solutions for unique requirements Concept and benefits

- › Low cost option to satisfy simple control requirements
- › Deployed on single or multiple units

			Connectable to:		
			Split	Sky Air	VRV
	<b>(E)KRP1B*</b> adapter for wiring	<ul style="list-style-type: none"> <li>› Facilitates integration of auxiliary heating apparatus, humidifiers, fans, damper</li> <li>› Powered by and installed at the indoor unit</li> </ul>		•	•
	<b>KRP2A*/KRP4A*</b> Wiring adapter for electrical appendices	<ul style="list-style-type: none"> <li>› Remotely start and stop up to 16 indoor units (1 group) (KRP4A* via P1 P2)</li> <li>› Remotely start and stop up to 128 indoor units (64 groups) (KRP2A* via F1 F2)</li> <li>› Alarm indication/ fire shut down</li> <li>› Remote temperature setpoint adjustment</li> <li>› Cannot be used in combination with a central controller</li> </ul>		•	•
	<b>SB.KRP58M2</b>	<ul style="list-style-type: none"> <li>› Low noise and demand control option for RZAG-N* and RZASG-M* series.</li> <li>› Obligatory mounted plate EKMKA2 needs to be ordered separately</li> </ul>		•	
	<b>KRP58M51</b>	<ul style="list-style-type: none"> <li>› Low noise and demand control option for RZA-D series.</li> <li>› Includes obligatory mounted plate EKMKA3</li> <li>› Obligatory mounting plate EKMKA3 needs to be ordered separately</li> </ul>		•	
	<b>DTA104A*</b> Outdoor Unit External Control Adapter	<ul style="list-style-type: none"> <li>› Individual or simultaneous control of VRV system operating mode</li> <li>› Demand control of individual or multiple systems</li> <li>› Low noise option for individual or multiple systems</li> </ul>			•
	<b>DCS302A52-9</b> Unification adapter for computerized control	<ul style="list-style-type: none"> <li>› Enables unified display (operation/malfunction) and unified control (ON/OFF) from BMS system</li> <li>› Must be used together with Intelligent Touch Controller or intelligent Touch Manager</li> <li>› Cannot be combined with KRP2/4*</li> <li>› Can be used for all VRV indoor models</li> </ul>			•
	<b>KRP928*</b> Interface adapter for DIII-net	<ul style="list-style-type: none"> <li>› Allows integration of split units to Daikin central controls</li> </ul>	•		
	<b>KRP980*</b> Adapter for split units without an S21 port	<ul style="list-style-type: none"> <li>› Connect a wired remote control</li> <li>› Connect to Daikin central controls</li> <li>› Allow external contact</li> </ul>	•		
	<b>KRP413*</b> Wiring adapter normal open contact / normal open pulse contact	<ul style="list-style-type: none"> <li>› Switch off auto restart after power failure</li> <li>› Indication of operation mode / error</li> <li>› Remotely start /stop</li> <li>› Remotely change operation mode</li> <li>› Remotely change fan speed</li> </ul>	•		

Some adapters require an installation box, refer to the option lists for more information

# Accessories


<b>EKRORO</b>		<ul style="list-style-type: none"> <li>› External ON/OFF or forced off</li> <li>› Example: door or window contact</li> </ul>
<b>EKRORO 3</b>		<ul style="list-style-type: none"> <li>› External ON/OFF or forced off</li> <li>› F1/F2 contact</li> <li>› Example: door or window contact</li> </ul>
<b>KRC19-26A</b>		<ul style="list-style-type: none"> <li>› Mechanical cool/heat selector</li> <li>› Allows switching over an entire system between cooling/heating/fan only</li> <li>› Connects to the A/B/C terminals of the unit</li> </ul>
<b>BRP2A81</b>		<ul style="list-style-type: none"> <li>› Cool/heat selector PCB</li> <li>› Required to connect KRC19-26A to a VRV IV outdoor unit</li> </ul>

## Individual and centralised controls

	BRC1D*	BRC1E*	BRC1H*	DCS301B51	DST301B51	DCS302C51	DCS601C51
Madoka Assistant app for advanced settings			•				
Electical box KJB111A	•	•	•				
Electical box KJB212A(A) (1)	•	•		•	•		
Electical box KJB311A(A)						•	
Electical box KJB411AA							•

(1) recommended as wider (more stable mounting)

## Intelligent Tablet Controller - DCC601A51


				
		Options for local control	Daikin Cloud Service options	Software
Wired screen for local control	AL-CCD07-VESA-1	•	-	-
Control and monitoring package		-	•	-
Remote support and diagnostics package		-	•	-
Advise and optimisation package		-	•	-
Commissioning tool		-	-	•
Software update tool		-	-	•

Daikin Cloud Service requires a subscription. Contact your local sales representative for more information

## Standard protocol interfaces - DMS502A51

		BACnet Interface
DIII-net expansion board (2 ports), connects up to 128 additional indoor units	DAM411B51	•
Digital pulse inputs (12) for PPD functionality	DAM412B51	•

## Intelligent Chiller Manager

		
Differential Pressure Sensor 4-20 mA 0-160 kPa	EKQDP2M016	•
Differential Pressure Sensor 4-20 mA 0-250 kPa	EKQDP2M020	•
Differential Pressure Sensor 4-20 mA 0-400 kPa	EKQDP2M040	•
Differential Pressure Sensor 4-20 mA 0-600 kPa	EKQDP2M060	•
ModBus RTU communication module	EKCM200J	•
BACnet IP communication module	EKCMBACIP	•

## Intelligent Touch Manager - DCM601A51

		Intelligent Manager	Daikin Cloud Service options (2)
iTM plus adapter – Allows connection of an additional 64 indoor units/groups. Up to 7 adapters can be connected	DCM601A52	•	
iTM PPD software – Allows distribution of used kWh by indoor units connected to the iTM	DCM002A51	•	
iTM HTTP interface - Allows communication to any third party controller via http interface	DCM007A51	•	
iTM Energy navigator – Energy management option	DCM008A51	•	
iTM BACnet Client option – Enables integration of third party devices to the iTM via the BACnet/IP protocol. (This is not a gateway and cannot replace DMS502A51)	DCM009A51	•	
Property Management System (PMS) interface option - Enables to connect to third party PMS systems	DCM010A51	• Oracle Opera PMS	
Monitoring package			•
Remote support and diagnostics package			•
Advise and optimisation package			•

## WAGO interface options for intelligent Touch Manager

## Required or optional WAGO base modules

Module type	Model code	Specifications	
24 V DC power supply	787-712	100 to 240 V AC → 24 V DC, 2.5 A	Required
Communications unit (Bus coupler)	WGDCMCPLR2	RS-485, Max:115.2kbps, not programmable	Required
Connector (1)	750-960		Required
Terminator module	750-600		Required
Power supply module	750-613	IN: 24 V DC, OUT: 5 V DC	Optional

## Supported WAGO I/O modules

I/O module type	Model code	Specifications	N° of contacts
Di	750-400	No-voltage contact input	2
	750-432	Contact rating: 24 V DC / 4.5 mA <sup>(1)</sup>	4
	750-430	No-voltage contact input Contact rating: 24 V DC / 2.8 mA	8
Do	750-513/000-001	No-voltage contact output Contact rating: 230 V AC / 30 V DC, 2 A	2
	750-504	No-voltage contact output Contact rating: 24 V DC / 0.5 A	4
Ai	750-454	Rated at 4 to 20 mA: 12-bit resolution	2
	750-455		4
	750-479	Rated at -10 to 10 V: 13-bit resolution	2
	750-459	Rated at 0 to 10 V: 12-bit resolution	4
Ao	750-554	Rated at 4 to 20 mA: 12-bit resolution	2
	750-555		4
	750-560	Rated at -10 to 10 V: 10-bit resolution	2
	750-559	Rated at 0 to 10 V: 12-bit resolution	4
Thermistor	750-461/020-000	NTC20K thermistor	2
	750-461	Pt 100/RTD	2
	750-460		4
	750-461/000-003	Pt 1000/RTD	2
	750-460/000-003		4
	50-461/000-004	Ni 100/RTD	2
	750-461/000-005	Ni1000 TK6180/RTD	2
	750-460/000-005		4
Pi	750-638	Minimum pulse width: 1 ms	2

(1) This connector must be attached to a communications unit that is connected to the RS485 port (2-pin) of the iTM unit.

(2) To connect intelligent Touch Manager to the Daikin Cloud Service, the IoT gateway (EU.SB.5000072) and AC/DC converter (999175A) is needed.



## Power supply

T1	=	3~, 220V, 50Hz
V1	=	1~, 220-240V, 50Hz
VE	=	1~, 220-240V/220V, 50Hz/60Hz*
V3	=	1~, 230V, 50Hz
VM	=	1~, 220~240V/220~230V, 50Hz/60Hz
W1	=	3N~, 400V, 50Hz
Y1	=	3~, 400V, 50Hz

\* For VE power supply only 1~, 220-240V, 50Hz data is displayed in this catalogue.

## Conversion table refrigerant piping

inch	mm
1/4"	6.4 mm
3/8"	9.5 mm
1/2"	12.7 mm
5/8"	15.9 mm
3/4"	19.1 mm
7/8"	22.2 mm
1 1/8"	28.5 mm
1 3/8"	34.9 mm
1 5/8"	41.3 mm
1 3/4"	44.5 mm
2"	50.8 mm
2 1/8"	54 mm
2 5/8"	66.7 mm

## F-gas regulation

Any refrigeration system that contains fluorinated greenhouse gases is in scope of the F-gas regulations.

For fully/partially pre-charged equipment: contains fluorinated greenhouse gases. Actual refrigerant charge depends on the final unit construction, details can be found on the unit labels and in the notes underneath the specification tables in this catalogue.

For non pre-charged equipment (including, but not limited to racks): its functioning relies on fluorinated greenhouse gases. The F-gas regulations do not apply to systems that contain only natural refrigerants such as propane or carbon dioxide.

## Measuring conditions

### Air conditioning

1) Nominal cooling capacities are based on:	
Indoor temperature	27°CDB/19°CWB
Outdoor temperature	35°CDB
Refrigerant piping length	7.5m - 8/5m VRV
Level difference	0m
2) Nominal heating capacities are based on:	
Indoor temperature	20°CDB
Outdoor temperature	7°CDB/6°CWB
Refrigerant piping length	7.5m - 8/5m VRV
Level difference	0m

### Refrigeration

ZEAS	Chilling	Evaporating temp. -10°C; outdoor temp. 32°C; Suction SH10°C
	Freezing	Evaporating temp. -35°C; outdoor temp. 32°C; Suction SH10°C
Conveni-Pack	Mix Air conditioning and refrigeration operating mode	Indoor temp. 27°CDB/19°CWB; outdoor temp. 32°CDB; piping length:7.5m; level difference: 0m; refrigeration side: Evaporating temp. -10°C; outdoor temp. 32°CDB; Suction SH: 10°C
	Mix heating and refrigeration operating mode (Heating recovery 100% mode)	Indoor temp. 20°C; outdoor temp. 7°CDB,6°CWB; advertised refrigerant load (Evaporating temp. -10°C; Suction SH: 10°C); piping length:7.5m; level difference: 0m
Booster unit		Evaporating temp. -35°C; outdoor temp. 32°C; suction SH 10K; saturated temp. to discharge pressure of booster unit -10°C
CCU/SCU	Medium temperature application	Medium temperature application: Outside ambient temp. 32°C; Evaporating temp. = -10°C and 10K superheat;
	Low temperature application	Low temperature application: Outside ambient temp. 32°C; Evaporating temp. = -35°C and 20°C suction gas temperature
Zanotti	Uni-Block, Bi-Block, Wineblock	High temperature
		Medium temperature
		Low temperature
	CU (one , twin, and more compressor(s))	Medium temperature
		Low temperature


### Applied systems

Air cooled	Cooling only	Evaporator: 12°C/7°C	Ambient: 35°CDB
	Heat pump	Evaporator: 12°C/7°C Condenser: 40°C/45°C	Ambient: 35°C Ambient: 7°CDB/6°CWB
Water cooled	Cooling only	Evaporator: 12°C/7°C Condenser: 30°C/35°C	
	Heating only	Evaporator: 12°C/7°C Condenser: 40°C/45°C	
Condenserless chiller		Evaporator: 12°C/7°C Condensing temperature: 45°C / liquid temperature: 40°C	
Fan coil units	Cooling		Indoor temperature 27°CDB, 19°CWB; entering water temperature 7°C, water temperature rise 5K
	Heating	2-pipe	Indoor temperature 20°CDB, 15°CWB; entering water temperature 45°C, water temperature drop 5K
		4-pipe	Indoor temperature 20°CDB, 15°CWB; entering water temperature 65°C, water temperature drop 10K
Air Handling Units	Temperature and humidity conditions: Extract air 22°C / 50%; Fresh air -10°C / 90%		


The sound pressure level is measured via a microphone at a certain distance from the unit. It is a relative value, depending on the distance and acoustic environment (for measuring conditions: please refer to the technical databooks). The sound power level is an absolute value indicating the "power" which a sound source generates. For more detailed information please consult our technical databooks.





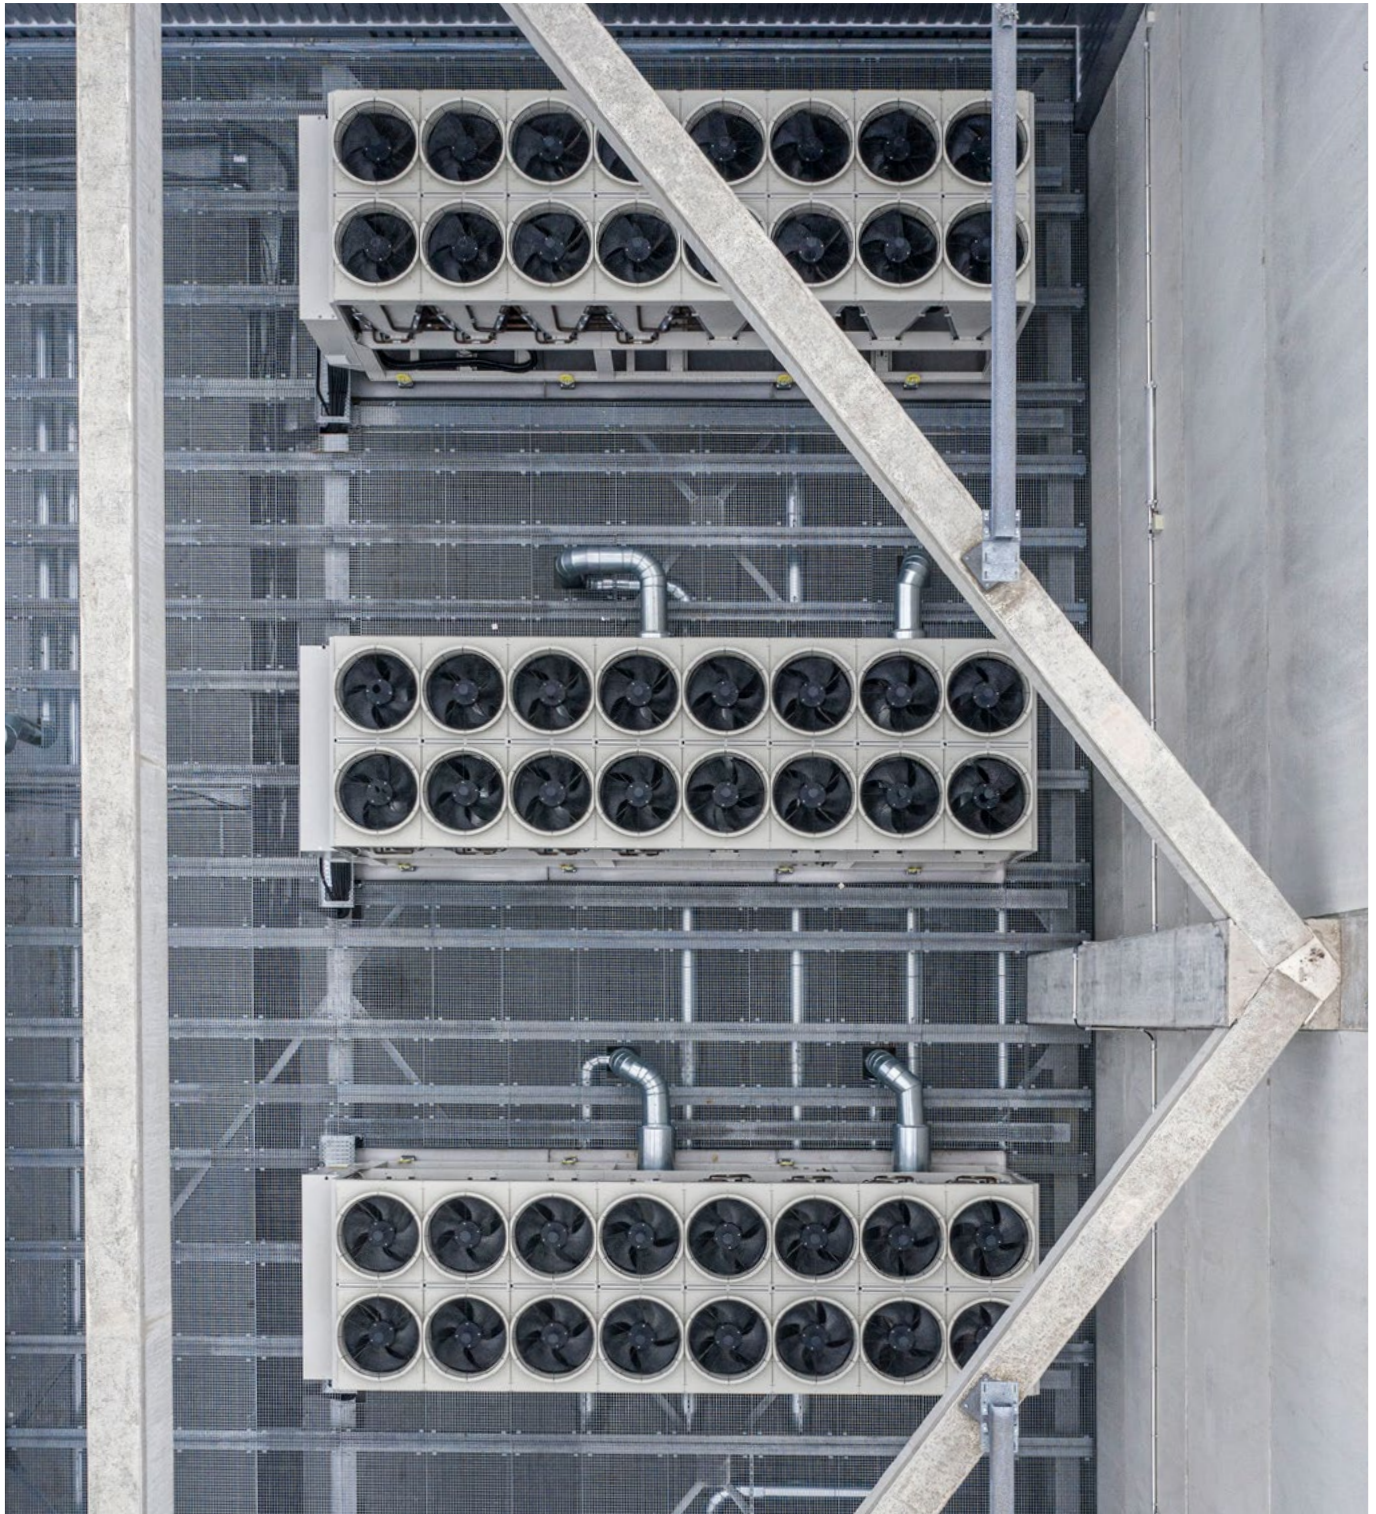

Daikin Europe N.V. Naamloze Venootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Publisher)



ECPEN22-400

01/22



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages, Hydronic Heat Pumps and Air Handling Units. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.